

12P
25 MAY 1970
U. S. ARMY

Technical Memorandum 7-70
25 MAY 1970

ADØ 705594

TACTICAL UTILITY HELICOPTER INFORMATION


TRANSFER STUDY

John A. Barnes

March 1970

AMCMS Code 5136.12.708.15.05

HUMAN ENGINEERING LABORATORIES

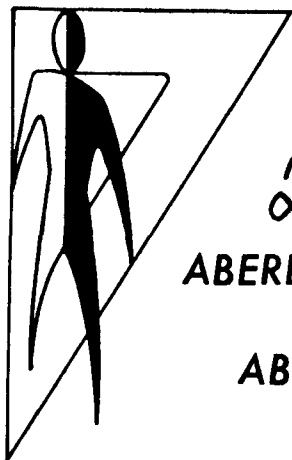

20050718078

ABERDEEN RESEARCH & DEVELOPMENT CENTER

ABERDEEN PROVING GROUND, MARYLAND

This document has been approved for public
release and sale; its distribution is unlimited.

Destroy this report when no longer needed.
Do not return it to the originator.

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

Use of trade names in this report does not constitute an official endorsement or approval of the use of such commercial products.

TACTICAL UTILITY HELICOPTER INFORMATION
TRANSFER STUDY

John A. Barnes

March 1970

APPROVED:



JOHN D. WEISZ

Director

Human Engineering Laboratories

HUMAN ENGINEERING LABORATORIES
U. S. Army Aberdeen Research & Development Center
Aberdeen Proving Ground, Maryland 21005

This document has been approved for public
release and sale; its distribution is unlimited.

ABSTRACT

The task requirements of the Tactical Utility Helicopter Mission have been enumerated and experienced pilots have indicated the instrumentation they feel is necessary to perform these tasks.

Film of eye movement was taken for two of the pilots while they were flying missions that incorporated these tasks. The film and the pilot replies were analyzed to provide the information transfer requirements for the Tactical Utility Helicopter flight instrumentation.

CONTENTS

| | |
|--|-----|
| ABSTRACT | iii |
| INTRODUCTION | 1 |
| METHOD | 3 |
| RESULTS | |
| Hover IGE | 15 |
| Terrain Following and Cruise VFR | 18 |
| Running Landing | 18 |
| 360° Hovering Turns; Hover OGE | 18 |
| Vertical Descent | 18 |
| DISCUSSION. | 24 |
| SUMMARY | 28 |
| REFERENCES | 31 |
| APPENDIXES | |
| A. Tactical Utility Helicopter Mission Tasks | 33 |
| B. Time-Based Use Analysis. | 45 |
| C. Use of the EMC-2 Eye-Movement Camera | 67 |
| BIBLIOGRAPHY. | 83 |

FIGURES

| | |
|---|----|
| 1. Mission Profiles | 2 |
| 2. UH-1-B | 4 |
| 3. UH-1-B Instrument Panel | 5 |
| 4. Instrument Panel with Fixation Spot | 6 |
| 5. Fixation Point, Visual Hover, In Ground Effect | 19 |
| 6. Fixation Point, Terrain Following | 19 |
| 7. Fixation Point, Low Level Navigation | 20 |
| 8. Fixation Point, Landing Approach | 20 |
| 9. Fixation Point, Visual Hover, Out of Ground Effect | 21 |
| 10. Fixation Point, Steep Approach | 21 |
| 11. Fixation Points, IEVD | 27 |
| 12. AH-1 | 29 |

TABLES

| | |
|--|----|
| 1. Information Requirements | 9 |
| 2. Percent Requirements | 12 |
| 3. Percent of Time Pilots Used Specific Instruments While Performing Given Tasks in Actual Flight | 13 |
| 4. Comparison of UCAD and HEL Findings | 14 |
| 5. Utility Transport Mission, Instrument Conditions, Percent of Time Information Required | 16 |
| 6. Rescue Mission, Low Level Outbound, Instruments Return, Percent of Time Information Required | 17 |

TACTICAL UTILITY HELICOPTER INFORMATION

TRANSFER STUDY¹

INTRODUCTION

The object of this effort was to analytically determine the information needs of the flight crew of a tactical utility helicopter which could be satisfied by basic flight instrumentation. Three typical utility helicopter missions were considered in the study:

1. Utility Transport Mission
2. Rescue Mission
3. Fire Support Mission

These missions were broken into segments or tasks, such as Hover in Ground Effect, and were further micronized to include the various information requirements necessary to enable the flight crew to perform the task.

A winged helicopter was chosen for a candidate vehicle because this configuration was considered to have the performance characteristics desirable in the 1975-80 time period and because research available from other sources allowed a base for comparing studies and conclusions.

A flight crew of a pilot and copilot was used because the cost of an aircraft of this type and the importance of the various assigned missions requires operator backup to make sure the mission is completed and vehicle returned. Conventional instrumentation was referenced in this analysis as it was the only instrumentation available for study. It was beyond the scope of this study to consider other methods of presenting to the flight crew information about their aircraft's orientation in space. This limitation should not be interpreted as a recommendation for using conventional instrumentation. Any device that can present more accurate and more complete information to the flight crew should be considered as a candidate for flight instrumentation in new aircraft systems. The criteria should be to provide the flight crew with the greatest

¹This study was a part of a program of research sponsored by the Avionics Laboratory, U. S. Army Electronics Command, to determine information requirements for the new generation of utility helicopters.

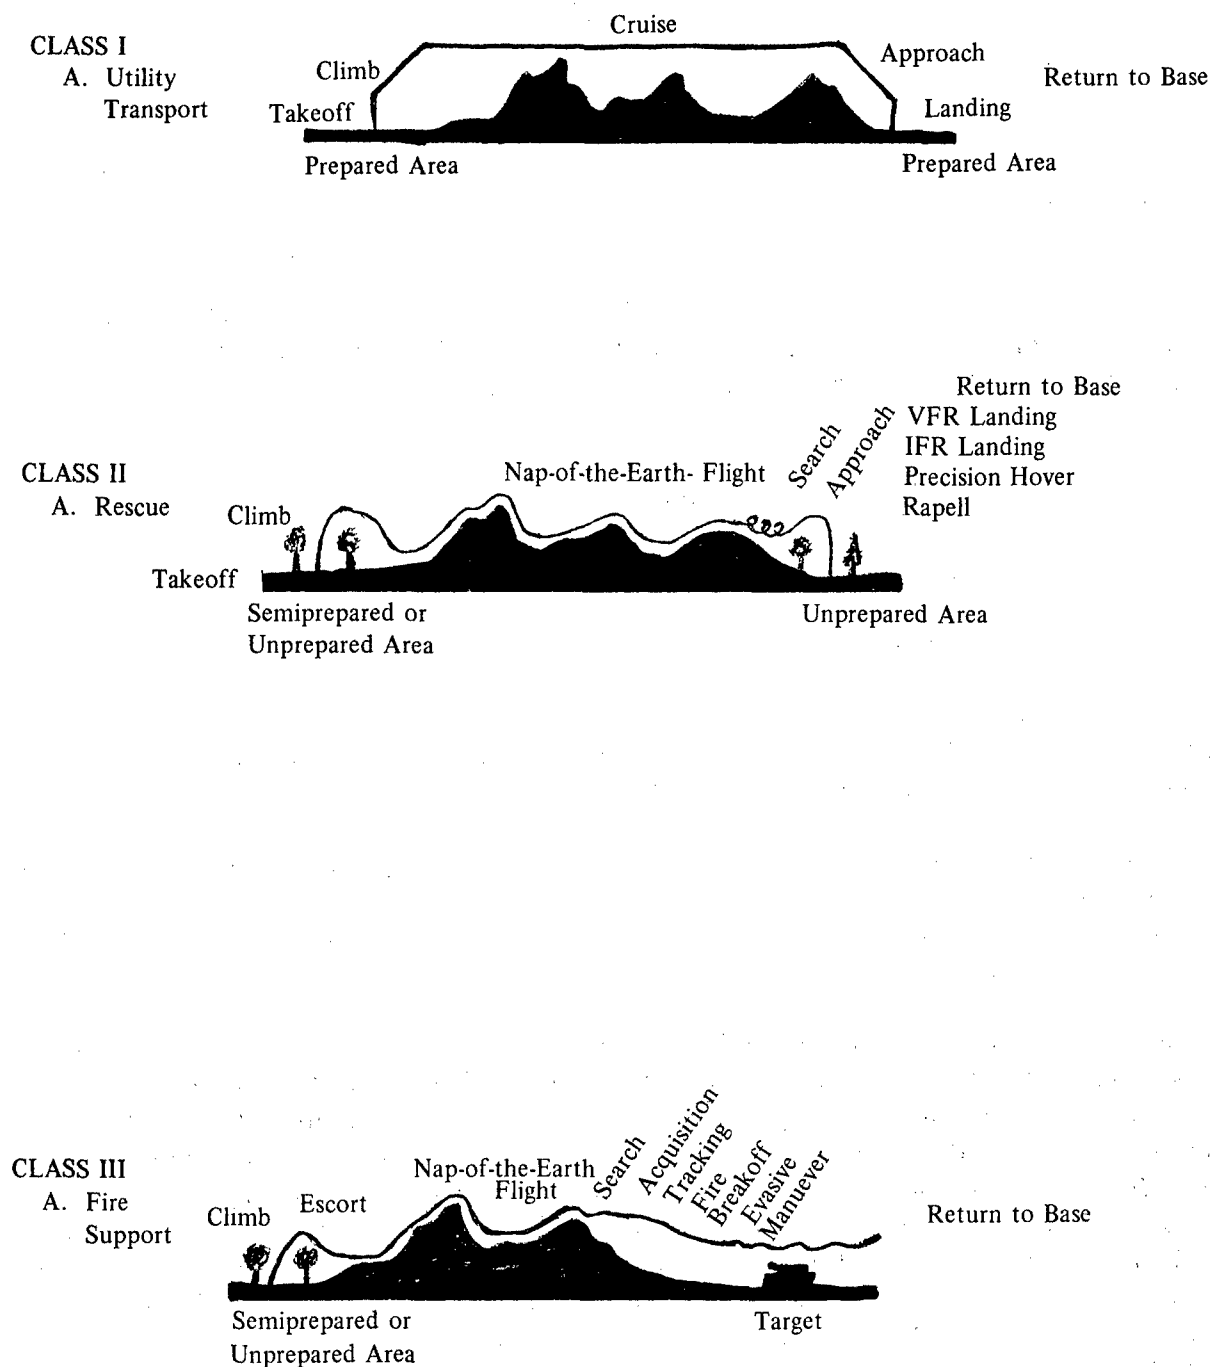


Fig. 1. MISSION PROFILES

amount of needed information in the most rapid manner with a minimum of interfaces.

The analysis was based on the specific instruments that the pilots said they used or needed to perform the mission segment tasks.

The overall analysis was verified by flights in a UH-1 aircraft using an eye-movement camera to determine which instruments the pilot used to perform specific tasks and the total amount of time each instrument was used during the performance of the task.

METHOD

This study used USAAVLABS TR 68-39, A Study of Handling Qualities of Winged Helicopters (10) and the JANAIR Integrated Cockpit Research Program report of January 1967 (7) as a basis for the performance requirements and for the mission tasks. Each of the three missions was divided into the unique segments that would comprise that type of mission. These segments were further divided into the specific tasks required to accomplish them. The tasks were investigated as to the various motions, decisions, instruments, times, etc., to determine the information requirements of the crewmen. There were 96 separate tasks considered for the three missions; this method will allow the construction of other missions' information requirements according to the appropriate tasks identified in this study.


This initial analysis was completed by using existing information concerning the tasks, flight requirements, and instrumentation. This work was then presented to 11 pilots who had flown these types of missions in combat. Each pilot was asked to indicate the method he employed to perform the specific task; what instruments, if any, he used; and what instrumentation and/or information he felt he needed to perform the task properly. The replies were recorded on tape to facilitate the interviews and to ensure accuracy in reducing data. A standard set of 96 tasks was used by the interviewer.

To verify the analysis of crewmen's information requirements, several flights were conducted in a UH-1 during which the tasks analyzed were performed and the pilot's eye movements were recorded. The combination of these three approaches - task analysis, interviews, and inflight validation - was the basis for this report.

The 11 crewmen who acted as subjects in the interview phase of the study were highly experienced rotary wing pilots whose actual flight time in rotary wing aircraft ranged from 1000 hours to 10,000 hours. All were qualified and current in the UH-1 and several were qualified and current in the AH-1. Also in the group were several that were qualified as instrument instructor/check pilots.



Fig. 2. UH-1-B

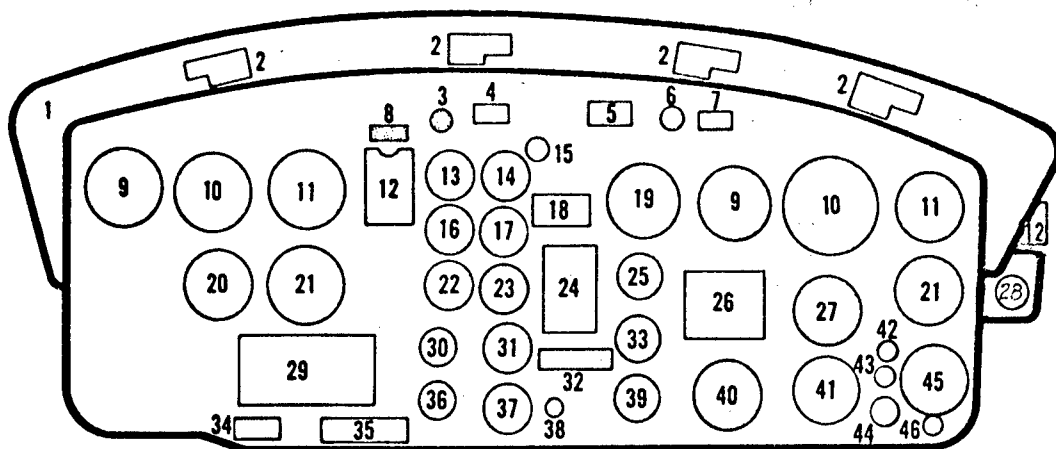

- | | | |
|------------------------------------|--|---------------------------------------|
| 1. Glare Shield | 17. Engine Oil Temperature Indicator | 33. Gas Producer Tachometer Indicator |
| 2. Secondary Lights | 18. Cargo Caution Decal | 34. Engine Installation Decal |
| 3. Engine Air Filter Light | 19. Dual Tachometer | 35. Transmitter Selector Decal |
| 4. Radio Call Designator | 20. Radio Magnetic Indicator | 36. Standby Generator Loadmeter |
| 5. Master Caution Light | 21. Vertical Velocity Indicator | 37. AC Voltmeter |
| 6. RPM Warning Light | 22. Transmission Oil Pressure Indicator | 38. Compass Slaving Switch |
| 7. Fire Detector Test Switch | 23. Transmission Oil Temperature Indicator | 39. Exhaust Gas Temperature Indicator |
| 8. Fire Warning Indicator Light | 24. Pilots Check List | 40. Turn and Slip Indicator |
| 9. Airspeed Indicator | 25. Torquemeter Indicator | 41. Omni Indicator |
| 10. Attitude Indicator | 26. Go-No-Go Take-off Data Placard | 42. Marker Beacon Light |
| 11. Altimeter | 27. Radio-Magnetic Indicator | 43. Marker Beacon Volume Control |
| 12. Compass Correction Card Holder | 28. Standby Compass | 44. Marker Beacon Volume Control |
| 13. Fuel Pressure Indicator | 29. Operating Limits Decal | 45. Clock |
| 14. Fuel Quantity Indicator | 30. Main Generator Loadmeter | 46. Cargo Release Armed Light |
| 15. Fuel Gage Test Switch | 31. DC Voltmeter | |
| 16. Engine Oil Pressure Indicator | 32. Engine Caution Decal | |

Fig. 3. UH-1-B INSTRUMENT PANEL

Appendix A contains a detailed description of the tasks that were presented by the questionnaire used in the interview phase and the flight plans of the missions flown during the flight phase.

Appendix C describes how the EMC-2 eye-movement camera may be used in an actual flight environment.



Fig. 4. INSTRUMENT PANEL WITH FIXATION SPOT
(500 feet per minute climb)

RESULTS

To relate this work to other efforts in the same area, the results of the flights and interviews will be presented in a format which is quite similar to that used by Ketchel and Jenney (6). The terms used and their definitions are as follows:

| | |
|--------------------|---|
| PITCH ANGLE | That component of attitude which provides the angle between the aircraft's longitudinal axis and the horizontal plane. |
| ROLL ANGLE | That component of attitude which provides the angle of the aircraft's rotation about its longitudinal axis. |
| ALTITUDE | Height above the surface and/or sea level. |
| AIRSPEED | Aircraft movement relative to the air mass along the heading vector. |
| STEERING | Heading necessary to make good a desired ground track. |
| ANGLE OF ATTACK | The acute angle between the longitudinal axis of the helicopter and a line representing the undisturbed relative airflow. |
| VERTICAL VELOCITY | Rate of climb or descent. |
| TURN RATE | Angular velocity during a turn (3° per second is a standard rate turn for aircraft considered in this study). |
| HOVER POSITION | Position in relation to desired reference point on the surface. |
| HOVER GROUND SPEED | Movement over the surface in any direction. |
| GROUND SPEED | Aircraft movement relative to the surface along the track vector. |
| TRACK | Path. |
| TORQUE | Power available. |
| RPM | Rotor and/or engine rotation speed. |

ENGINE CONDITION

Engine and drive train information such as temperature and pressure readings that provide information on present engine operation.

The results of the interviews are shown in Table 1. It will be noted that there are 43 tasks listed instead of the 96 tasks referenced previously; many of the tasks differed only slightly in parameters of performance from other similar tasks. When the results of the interviews were compiled, it was found that they could be presented using 43 tasks without loss of pertinent information. Table 1 indicates the percentage of the interviewees who stated that they would require information from a specific instrument or group of instruments to perform a given task within the specified performance parameters as well as the major source of information for the task. This study used the assumption that if an item was important enough to a pilot for him to be concerned about it, then it was an item about which he required information to perform the task at hand. Therefore, Table 1 can serve as a guide for providing to the pilot the information he requires.

The flight portion of the study included 21 of the tasks from the interview phase. These tasks were:

1. Spot Hover in Ground Effect, Visual
2. Spot Hover in Ground Effect, Instruments
3. Spot Hover Out of Ground Effect
4. 360° Hovering Turn Out of Ground Effect
5. Vertical Climb
6. Vertical Descent
7. Cruise, 60K, Visual
8. Cruise, 60K, Instruments
9. Standard Rate Turn, 60K
10. Climb, 60K, 500 Feet Per Minute
11. Climb from Hover
12. Initial Descent to 500 Feet; 60K (Approach)
13. Reverse Direction of Flight, 60K

TABLE 1
Information Requirements
(Percent of subjects indicating a requirement for specific information)

| Task | Information | Pitch Angle | Roll Angle | Altitude | Airspeed | Steering | Angle of Attack | Vertical Velocity | Turn Rate | Hover Position | Over Ground Speed | Heading | Ground Speed | Track | Torque | RPM | Engine Condition | External Source | Internal Source |
|------------------------------|-------------|-------------|------------|----------|----------|----------|-----------------|-------------------|-----------|----------------|-------------------|---------|--------------|-------|--------|-----|------------------|-----------------|-----------------|
| 0 to 3 Knots | | | | | | | | | | | | | | | | | | | |
| Spot Hover ICE, Visual | | 9 | 9 | 9 | | | | | | 27 | 27 | 18 | 18 | | 73 | 82 | 36 | 91 | 9 |
| Spot Hover ICE, Visual | | 9 | 9 | 9 | | 18 | | | 9 | | 18 | 18 | 18 | | 64 | 82 | 27 | 91 | 9 |
| Spot Hover OGE, Visual | | 9 | 9 | 73 | 27 | 91 | | 9 | | | 27 | 55 | 27 | 36 | 36 | 36 | 27 | 82 | 18 |
| 360° Hovering Turn ICE | | 27 | 27 | 55 | 18 | 91 | | 9 | 27 | | 9 | 64 | 9 | 27 | 64 | 64 | 27 | 91 | 9 |
| 360° Hovering Turn OGE | | 36 | 36 | 55 | 18 | 91 | | | 18 | | 9 | 73 | 9 | 18 | 64 | 64 | 27 | 91 | 9 |
| Vertical Climb | | 36 | 36 | 64 | | 73 | | 73 | | | 18 | 45 | 18 | 27 | 73 | 73 | 36 | 82 | 18 |
| Vertical Descent | | 36 | 36 | 64 | 9 | 73 | | 91 | | | | 45 | | 27 | 55 | 73 | 27 | 73 | 27 |
| 3 to 60 Knots | | | | | | | | | | | | | | | | | | | |
| Cruise, Visual | | 73 | 73 | 91 | 100 | 100 | | 82 | 36 | | | 82 | | 27 | 55 | 45 | 45 | 55 | 45 |
| Cruise, Instruments | | 91 | 91 | 91 | 100 | 100 | | 91 | 36 | | | 91 | | 36 | 55 | 45 | 36 | | 100 |
| Standard Rate Turn | | 100 | 100 | 100 | 100 | 100 | | 73 | 82 | | | 82 | | 36 | 27 | 27 | 18 | | 100 |
| Climb, 500 Feet per Minute | | 73 | 73 | 91 | 82 | 91 | | 100 | 27 | | | 73 | | 18 | 55 | 27 | 9 | | 100 |
| Climb from Hover | | 64 | 64 | 64 | 55 | 73 | | 91 | 18 | | | 64 | | 9 | 82 | 55 | 18 | | 100 |
| Climb, Instruments | | 82 | 82 | 82 | 73 | 100 | | 100 | 9 | | | 73 | | 27 | 73 | 36 | 18 | | 100 |
| Initial Descent, Visual | | 45 | 45 | 45 | 82 | 91 | 18 | 91 | 9 | | | 64 | | 27 | 55 | 27 | 9 | 73 | 27 |
| Initial Descent, Instruments | | 82 | 82 | 91 | 91 | 100 | 18 | 91 | 18 | | 18 | 82 | 18 | 45 | 73 | 27 | 18 | 18 | 82 |
| Final Approach | | 18 | 18 | 18 | 55 | 18 | | 64 | | | 27 | 18 | 27 | | 36 | 36 | 9 | 91 | 9 |
| Assault Landings | | 27 | 27 | 45 | 82 | 55 | | 64 | | | 45 | 36 | 45 | 18 | 73 | 64 | 18 | 82 | 18 |
| Deceleration | | 27 | 27 | 64 | 64 | 91 | | 27 | 9 | | | 64 | | 27 | 82 | 36 | | 64 | 36 |
| Reverse Direction of Flight | | 82 | 82 | 64 | 73 | 45 | | 18 | 91 | | | 36 | | 9 | 64 | 45 | 27 | 36 | 64 |

TABLE 1 (Continued)

| Task | Information | Pitch Angle | Roll Angle | Altitude | Airspeed | Steering | Angle of Attack | Vertical Velocity | Turn Rate | Hover Position | Over Ground Speed | Heading | Ground Speed | Track | Torque | RPM | Engine Condition | External Source | Internal Source |
|---------------------------------|-------------|-------------|------------|----------|----------|----------|-----------------|-------------------|-----------|----------------|-------------------|---------|--------------|-------|--------|-----|------------------|-----------------|-----------------|
| Gunnery Run | | 44 | 44 | 22 | 77 | 33 | 33 | 56 | 11 | | 33 | | | | 18 | 33 | 9 | 82 | 18 |
| Tear Drop Maneuver | | 73 | 73 | 36 | 64 | 27 | | 55 | 27 | | 27 | 27 | | | 27 | 36 | 9 | 91 | 9 |
| Breakoff Maneuver | | 45 | 45 | 45 | 55 | 36 | | 82 | 27 | | | 27 | | 9 | 73 | 55 | 36 | 73 | 27 |
| Autorotation, Visual | | 18 | 18 | 36 | 91 | 27 | | 27 | | | 27 | 27 | 27 | | 9 | 100 | 18 | 91 | 9 |
| Autorotation, Instruments | | 91 | 91 | 73 | 91 | 100 | | 82 | 9 | | | 82 | | 36 | 36 | 100 | 18 | | |
| 60 to 150 Knots | | | | | | | | | | | | | | | | | | | |
| Cruise, Visual | | 55 | 55 | 100 | 91 | 100 | | 55 | 27 | | | 64 | 45 | 45 | 55 | 45 | 45 | 64 | 36 |
| Cruise, Instruments | | 91 | 91 | 100 | 100 | 100 | | 100 | 36 | | | 82 | | 36 | 36 | 45 | 27 | | 100 |
| Standard Rate Turn | | 100 | 100 | 100 | 100 | 100 | | 64 | 82 | | | 73 | | 36 | 36 | 36 | 18 | | 100 |
| Terrain Following, Visual | | 9 | 9 | 45 | 45 | 55 | | 9 | 45 | | | 45 | | 9 | 45 | 27 | 18 | 100 | |
| Nap-of-the-earth Flight | | 9 | 9 | 49 | 36 | 55 | | 9 | 9 | | | 36 | | 18 | 55 | 45 | 36 | 100 | |
| Climb Visual | | 73 | 73 | 91 | 82 | 82 | | 100 | 18 | | | 64 | | 18 | 64 | 36 | 18 | 18 | 82 |
| Climb, Instruments | | 82 | 82 | 82 | 82 | 100 | | 100 | 9 | | | 73 | | 36 | 64 | 55 | 27 | | 100 |
| Climb, 500 Feet per Minute | | 73 | 73 | 82 | 91 | 91 | | 100 | 27 | | | 73 | | 18 | 55 | 27 | 18 | 18 | 82 |
| Descent, Instruments | | 73 | 73 | 82 | 81 | 100 | 33 | 91 | 27 | | | 91 | | 36 | 73 | 36 | 18 | | 100 |
| Standard Rate Turn, Instruments | | 91 | 91 | 100 | 73 | 100 | | 91 | 100 | | | 82 | | 27 | 45 | 27 | 18 | | 100 |
| Target Tracking | | 44 | 44 | | 44 | 33 | 33 | 56 | 11 | | | 22 | | 11 | | 11 | | 100 | |
| Target Acquisition | | 25 | 25 | | 25 | 63 | 38 | 25 | | 13 | | 50 | 13 | 13 | | | | 100 | |
| Break Off Maneuver | | 60 | 60 | 40 | 50 | 60 | | 90 | 20 | | | 40 | 9 | 20 | 90 | 60 | 40 | 70 | 30 |
| Acceleration | | 64 | 64 | 64 | 55 | 73 | | 55 | | 9 | | 73 | | 18 | 73 | 64 | 36 | 36 | 64 |
| Reverse Direction of Flight | | 82 | 82 | 82 | 82 | 55 | | 27 | 100 | | | 36 | | | 82 | 45 | 18 | 45 | 55 |
| Teardrop Maneuver | | 73 | 73 | 45 | 82 | 27 | | 45 | 36 | 27 | | 27 | 27 | 9 | 36 | 36 | 9 | 82 | 18 |
| Gunnery Run | | 45 | 45 | 9 | 64 | 55 | 18 | 64 | 9 | | | 45 | | | 18 | 27 | 9 | 82 | 18 |
| Autorotation, Visual | | 27 | 27 | 27 | 91 | 19 | | 45 | | 27 | | 27 | 27 | | 9 | 100 | 18 | 82 | 18 |
| Autorotation, Instruments | | 100 | 100 | 91 | 91 | 100 | | 82 | | | | 91 | | 45 | 27 | 100 | 9 | | 100 |

14. Cruise, 100K, Visual
15. Cruise, 100K, Instruments
16. Standard Rate Turn, 100K
17. Terrain Following, 100K
18. Climb, 100K, 500 Feet Per Minute
19. Descent, 100K, 500 Feet Per Minute
20. 180° Descending Turn, 100K
21. Reverse Direction of Flight, 100K

Table 2, which was extracted from Table 1, shows the response of the pilots interviewed to the above tasks. The numbers represent the percentage of the pilots that expressed a desire for information "information requirement" about the listed item in order to perform the task. The value given in the table referred to the use of a device presently installed in the UH-1 to provide the information or to a desired device to provide the information. Two categories which are not mentioned in other studies have been added to this table; they are the source of information used to perform the task:

EXTERNAL SOURCE - information source is outside the cockpit

INTERNAL SOURCE - information source is inside the cockpit.

Hence for a task such as SPOT HOVER, we find that 91 percent of the pilot's information comes from an external source.

Table 3 presents the percentage of time the pilots used the various available sources of information while actually performing the tasks in the UH-1 helicopters. This data was obtained from eye-movement camera film taken during the time the pilots were actually flying the UH-1.

A task-by-task comparison of these two tables provides a clear indication of what the contemporary helicopter pilot feels his information requirements are and where he obtains this information. Figures 1B through 21B in Appendix B present the information from Table 3 in graphic form.

In many cases it will be found that the sum of the part times exceeds 100 percent; this was due to the pilot fixating at a point in the flight instrument section of the instrument panel adjacent to several instruments and looking at more than one instrument without moving his fixation point. Hence, the data reflected that he was looking at

TABLE 2

Percent Requirements
(Percent of subjects indicating a requirement for specific information)

| Task | Information | Pitch Angle | Roll Angle | Altitude | Airspeed | Steering | Angle of Attack | Vertical Velocity | Turn Rate | Hover Position | Over Ground Speed | Heading | Ground Speed | Track | Torque | RPM | Engine Condition | External Source | Internal Source |
|------------------------------|---|-------------|------------|----------|----------|----------|-----------------|-------------------|-----------|----------------|-------------------|---------|--------------|-------|--------|-----|------------------|-----------------|-----------------|
| Spot Hover IGE Instructions | This task was not included in the interviews. | | | | | | | | | | | | | | | | | | |
| Spot Hover IGE Visual | | 9 | 9 | 9 | | | | | | 27 | 27 | 18 | 27 | | 73 | 82 | 36 | 91 | 9 |
| Spot Hover OGE | | 9 | 9 | 73 | 27 | 91 | | 9 | | | 27 | 55 | 27 | 36 | 36 | 36 | 27 | 82 | 18 |
| 360° Hovering Turn OGE | | 36 | 36 | 55 | 18 | 91 | | | 18 | | 9 | 73 | 9 | 18 | 64 | 64 | 27 | 91 | 9 |
| Vertical Climb | | 36 | 36 | 64 | | 73 | | 73 | | | 18 | 45 | 18 | 27 | 73 | 73 | 36 | 82 | 18 |
| Vertical Descent | | 36 | 36 | 64 | 9 | 73 | | 91 | | | | 45 | | 27 | 55 | 73 | 27 | 73 | 27 |
| Cruise, 60K, Visual | | 73 | 73 | 91 | 100 | 100 | | 82 | 36 | | | 82 | | 27 | 55 | 45 | 45 | 55 | 45 |
| Cruise, 60K, Instruments | | 91 | 91 | 91 | 100 | 100 | | 91 | 36 | | | 91 | | 36 | 55 | 45 | 36 | | 100 |
| Standard Rate Turn, 60K | | 100 | 100 | 100 | 100 | 100 | | 73 | 82 | | | 82 | | 36 | 27 | 27 | 18 | | 100 |
| Climb, 60K, 500 FPM | | 73 | 73 | 91 | 82 | 91 | | 100 | 27 | | | 73 | | 18 | 55 | 27 | 9 | | 100 |
| Climb from Hover | | 64 | 64 | 64 | 55 | 73 | | 91 | 18 | | | 64 | | 9 | 82 | 55 | 18 | | 100 |
| Initial Descent to 500 Feet | | 82 | 82 | 91 | 91 | 100 | 20 | 91 | 18 | | 18 | 82 | 18 | 45 | 73 | 27 | 18 | 18 | 82 |
| Reverse Dir. of Flight, 60K | | 82 | 82 | 64 | 73 | 45 | | 18 | 91 | | | 36 | | 9 | 64 | 45 | 27 | 36 | 64 |
| Cruise, 100K, Visual | | 55 | 55 | 100 | 91 | 100 | | 55 | 27 | | | 64 | | 45 | 45 | 55 | 45 | 64 | 36 |
| Cruise, 100K, Instruments | | 91 | 91 | 100 | 100 | 100 | | 100 | 36 | | | 82 | | 36 | 36 | 45 | 27 | | 100 |
| Standard Rate Turn, 100K | | 100 | 100 | 100 | 100 | 100 | | 64 | 82 | | | 73 | | 36 | 36 | 36 | 18 | | 100 |
| Terrain Following, 100K | | 9 | 9 | 45 | 45 | 55 | | 9 | 45 | | | 45 | | 9 | 45 | 27 | 18 | 100 | |
| Climb, 100K, 500 FPM | | 73 | 73 | 82 | 91 | 91 | | 100 | 27 | | | 73 | | 18 | 55 | 27 | 18 | 18 | 82 |
| Descent, 100K, 500 FPM | | 73 | 73 | 82 | 91 | 100 | 33 | 91 | 27 | | | 91 | | 36 | 73 | 36 | 18 | | 100 |
| 180° Descending Turn, 100K | | 91 | 91 | 100 | 73 | 100 | | 91 | 100 | | | 82 | | 27 | 45 | 27 | 18 | | 100 |
| Reverse Dir. of Flight, 100K | | 82 | 82 | 82 | 82 | 55 | | 27 | 100 | | | 36 | | 18 | 73 | 64 | 36 | 45 | 55 |

TABLE 3

Percent of Time Pilots Used Specific Instruments While Performing
Given Tasks in Actual Flight

| Task | Instrument | Attitude Indicator | Altimeter | Airspeed Indicator | Compass | Vertical Velocity | Rate of Turn | Torque Meter | Dual Tachometer | Engine Instruments | External References |
|------------------------------|------------|--------------------|-----------|--------------------|---------|-------------------|--------------|--------------|-----------------|--------------------|---------------------|
| Spot Hover IGE Visual | | 3 | 2 | 1 | 2 | 2 | 1 | 2 | 2 | 1 | 85 |
| Spot Hover IGE Instruments | | 25 | 12 | 7 | 18 | 12 | 3 | 15 | 13 | 11 | |
| Spot Hover OGE | | 27 | 22 | 17 | 17 | 20 | 2 | 11 | 12 | 7 | |
| 360° Hovering Turn OGE | | 15 | 19 | 9 | 1 | 5 | | 5 | 5 | 3 | 38 |
| Vertical Climb | | 29 | 30 | 9 | 7 | 20 | 3 | 7 | 6 | 5 | |
| Vertical Descent | | 4 | 5 | 4 | 3 | 1 | | 2 | 4 | 7 | 75 |
| Cruise, 60K, Visual | | 10 | 8 | 7 | 13 | 7 | 1 | 5 | 4 | 4 | 48 |
| Cruise, 60K, Instruments | | 23 | 21 | 12 | 14 | 10 | 2 | 8 | 8 | 11 | |
| Standard Rate Turn, 60K | | 23 | 18 | 9 | 19 | 9 | 7 | 6 | 6 | 6 | |
| Climb, 60K, 500 FPM | | 19 | 17 | 11 | 19 | 19 | 2 | 8 | 6 | 7 | |
| Climb from Hover | | 23 | 23 | 7 | 6 | 16 | 3 | 6 | 5 | 4 | 15 |
| Initial Descent to 500', 60K | | 31 | 27 | 24 | 17 | 24 | | 6 | 7 | 10 | |
| Reverse Dir. of Flight, 60K | | 23 | 18 | 9 | 19 | 9 | 7 | 6 | 6 | 6 | |
| Cruise, 100K, Visual | | 10 | 8 | 7 | 13 | 7 | 1 | 5 | 4 | 4 | 48 |
| Cruise, 100K, Instruments | | 23 | 21 | 10 | 15 | 10 | 2 | 4 | 5 | 5 | |
| Standard Rate Turn, 100K | | 14 | 25 | 2 | 25 | 14 | 1 | 3 | 3 | 3 | |
| Terrain Following, 100K | | 2 | 2 | 2 | 2 | 2 | | 2 | 2 | 2 | 85 |
| Climb, 100K, 500 FPM | | 8 | 15 | 13 | 10 | 12 | 3 | 4 | 9 | 3 | |
| Descent, 100K, 500 FPM | | 27 | 29 | 16 | 11 | 17 | 2 | 6 | 7 | 7 | |
| 180° Descending Turn, 100K | | 35 | 18 | 15 | 8 | 8 | 3 | 3 | 4 | 5 | 3 |
| Reverse Dir. of Flight, 100K | | 14 | 25 | 2 | 25 | 14 | 1 | 3 | 3 | 3 | |

TABLE 4

Comparison of UCAD and HEL Findings

| Display Parameters | UCAD* | HEL* |
|---------------------------------|-------|------|
| Flight Information Parameters | | |
| Airspeed - Longitudinal | 1 | 1 |
| Airspeed - Lateral | 1 | 2 |
| Altitude - True | 1 | 1 |
| Altitude - Absolute | 1 | 1 |
| Pitch Angle | 1 | 1 |
| Roll Angle | 1 | 1 |
| Heading | 1 | 1 |
| Vertical Speed - True | 1 | 1 |
| Vertical Speed - Absolute | 1 | 1 |
| Sideslip | 1 | 2 |
| Groundspeed - Longitudinal | 2 | 1 |
| Groundspeed - Lateral | 2 | 2 |
| Angle of Attack | 0 | 2 |
| Normal Load Factor | 0 | 2 |
| Lateral Glideslope Deviation | 2 | 2 |
| Vertical Glideslope Deviation | 2 | 2 |
| Runway Position/Touchdown Point | 3 | 3 |
| Trim Position | 3 | 0 |
| Time | 2 | 2 |
| Propulsion System Parameters | | |
| Engine RPM | 0 | 2 |
| Rotor RPM | 1 | 1 |
| Torque - Rotor | 1 | 1 |
| Torque - Fan | 1 | 1 |
| Percent Power | 1 | 1 |
| Specialized Control Parameters | | |
| Longitudinal Acceleration | 3 | 2 |
| Lateral Acceleration | 2 | 3 |
| Pitch Angle Rate | 2 | 2 |
| Roll Angle Rate | 2 | 2 |
| Heading Rate | 1 | 1 |
| Vertical Acceleration | 3 | 3 |

*Key: 1 = Frequently required for normal flight phases.

2 = Information required only for specific flight phases but necessary for over-all mission sources.

3 = Information required for special missions only.

0 = Not applicable.

more than one instrument (usually two) for that period of time.

Tables 5 and 6 present a grouping of the tasks which comprise a Utility Transport Mission and a Rescue mission. These tables indicate the percentage of the total time that an instrument source was used to provide the information required for the pilot to perform the task at hand. Tasks which indicate a 100 percent usage of internal sources provide the information requirements for that task; tasks which show less than 100 percent usage of internal sources indicate that the pilot was securing additional attitude, speed, etc., information from the real world. Tasks which show a two percent usage of an instrument source indicate that this source was essentially only checked during the pilot's overall instrument check, therefore it should not be considered as a specific use of this source.

It has been the attempt of this study to present to the reader the means by which contemporary pilots obtain the information required to perform the various tasks of the tactical utility helicopter mission. Many analytical studies have spelled out the information that a pilot needs to perform specific tasks and the time-line analysis of how and when he is supposed to use this information. While this is an excellent approach, this study wanted to determine where the pilot secures this information, what source of the several available to him he uses, how much of his time is used in securing this information, and what he looks at when he views the real world for cues to maintain his desired flight path. The results section has posed an answer to all of these propositions except the last, What does the pilot use for cues in the real world?, but an analysis of the eye-movement film and postflight talks with the subjects have provided the following information concerning these cues.

Hover IGE

The film indicated that the pilot was using an intersection of the left edge of the runway and a runway seam as a target; he was using the right hand FM antenna as a sight-device to aim at this point. This arrangement provided him the pitch, roll, vertical velocity, and over-the-ground movement information. RPM and torque or power information was obtained in a semi-gross manner by monitoring aural and tactile sensation; the proper conditions feel and sound a certain way and deviations from these sounds and feel required a check of the instruments for specific information. Under conditions where a runway is not available, the pilot uses a terrain feature in the immediate area to provide the information ordinarily obtained from the runway edge/seam intersection.

TABLE 5

Utility Transport Mission, Instrument Conditions, Percent of Time Information Required

| Task | Information | Pitch Angle | Roll Angle | Altitude | Airspeed | Steering | Angle of Attack | Vertical Velocity | Turn Rate | Hover Position | Over-Ground Speed | Heading | Ground Speed | Track | Torque | RPM | Engine Condition | External Source | Internal Source |
|-------------------------------|-------------|-------------|------------|----------|----------|----------|-----------------|-------------------|-----------|----------------|-------------------|---------|--------------|-------|--------|-----|------------------|-----------------|-----------------|
| Take Off - Climb | | 23 | 23 | 23 | 7 | 6 | 0 | 16 | 3 | 0 | 7 | 6 | 7 | 6 | 6 | 5 | 4 | 15 | 85 |
| Cruise Instruments | | 23 | 23 | 21 | 10 | 15 | 0 | 10 | 2 | 0 | 10 | 15 | 10 | 15 | 4 | 5 | 0 | 0 | 100 |
| Standard Rate Turn Instrument | | 14 | 14 | 25 | 2 | 25 | 0 | 14 | 1 | 0 | 2 | 25 | 2 | 25 | 3 | 3 | 3 | 0 | 100 |
| Descent, Approach Instrument | | 31 | 31 | 27 | 24 | 17 | 18* | 24 | 0 | 0 | 0 | 27 | 0 | 27 | 6 | 7 | 10 | 0 | 100 |
| Land (Vertical Descent) | | 4 | 4 | 5 | 4 | 3 | 0 | 1 | 0 | 4 | 4 | 3 | 4 | 3 | 2 | 4 | 7 | 75 | 25 |
| Mean Use for Mission | | 19 | 19 | 20 | 9 | 13 | 4* | 13 | 1 | 1 | 5 | 15 | 5 | 15 | 4 | 5 | 6 | 18 | 82 |

Key: * = Desired information
 2 = Routine instrument check

TABLE 6

Rescue Mission, Low Level Outbound, Instruments Return, Percent of Time Information Required

| Task | Information | Pitch Angle | Roll Angle | Altitude | Airspeed | Steering | Angle of Attack | Vertical Velocity | Turn Rate | Hover Position | Over Ground Speed | Heading | Ground Speed | Track | Torque | RPM | Engine Condition | External Source | Internal Source |
|-------------------------------|-------------|-------------|------------|----------|----------|----------|-----------------|-------------------|-----------|----------------|-------------------|---------|--------------|-------|--------|-----|------------------|-----------------|-----------------|
| Take - Climb | | 23 | 23 | 23 | 7 | 6 | 0 | 16 | 3 | 0 | 7 | 6 | 7 | 6 | 6 | 5 | 4 | 15 | 85 |
| Terrain Following | | 2 | 2 | 2 | 2 | 2 | 0 | 2 | 2 | 0 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 85 | 15 |
| Precision Hover OGE | | 27 | 27 | 22 | 17 | 17 | 0 | 20 | 2 | 17 | 17 | 17 | 17 | 0 | 11 | 12 | 7 | 0 | 100 |
| 360° Hovering Turn OGE | | 15 | 15 | 19 | 9 | 1 | 0 | 5 | 0 | 38 | 38 | 1 | 9 | 1 | 5 | 5 | 3 | 38 | 62 |
| Climb From Hover | | 23 | 23 | 23 | 7 | 6 | 0 | 16 | 3 | 0 | 7 | 6 | 7 | 6 | 6 | 5 | 4 | 15 | 85 |
| Cruise, Instruments | | 23 | 23 | 21 | 10 | 15 | 0 | 10 | 2 | 0 | 10 | 15 | 10 | 15 | 4 | 5 | 5 | 0 | 100 |
| Descent, Approach, Instrument | | 31 | 31 | 27 | 24 | 17 | 18* | 24 | 0 | 0 | 24 | 17 | 24 | 17 | 6 | 7 | 10 | 0 | 100 |
| Land, Vertical Descent | | 4 | 4 | 5 | 4 | 3 | 0 | 1 | 0 | 4 | 4 | 3 | 4 | 3 | 2 | 4 | 7 | 75 | 25 |
| Mean Use for Mission | | 18 | 18 | 18 | 10 | 8 | 2* | 12 | 1 | 8 | 14 | 8 | 10 | 6 | 5 | 6 | 5 | 29 | 71 |

Key: * = Desired information
 2 = Routine instrument check

Terrain Following and Cruise VFR

The real-world cues for these two tasks are quite similar with possibly a rate difference due to the lower height above the terrain of the Terrain Following task. Pitch and roll can be determined fairly accurately, while heading and altitude are less accurate, and velocity approaches the gross-information category. Again the general power and engine information is determined by aural and tactile sensation. When a pilot is questioned he says he uses the horizon as a reference; this may be true, but the eye movements filmed during the four flights which recorded the above tasks show that instead of the horizon the pilot fixates on a point and/or a line of terrain features, i.e., a relief line, parallel to the horizon and perpendicular to the flight path. This line was generally at a depression angle of 20 degrees.

Running Landing

While the subjects did not do this particular maneuver, the safety pilot did and they followed the maneuver. In this maneuver the right FM antenna was again used as a sight to line up on the runway centerline, and as the aircraft approached the runway the sighting target was shifted from the centerline to the left edge of the runway and remained there until touchdown. The information obtained is essentially the same as that for hover plus vertical rate of closure.

360° Hovering Turns; Hover OGE

These maneuvers are essentially the same as far as the real-world cues are concerned. The pilots appeared to pick out a relief feature to use as a reference point/line as they had done during the terrain following and cruise tasks and they used the point to determine yaw rate. This point was used as the point to start and to complete the turn on in the first instance and as the point to aim on to prevent yaw in the other.

Vertical Descent

A point on the ground was used to determine rate of closure/descent and as a general speed, yaw and attitude reference.

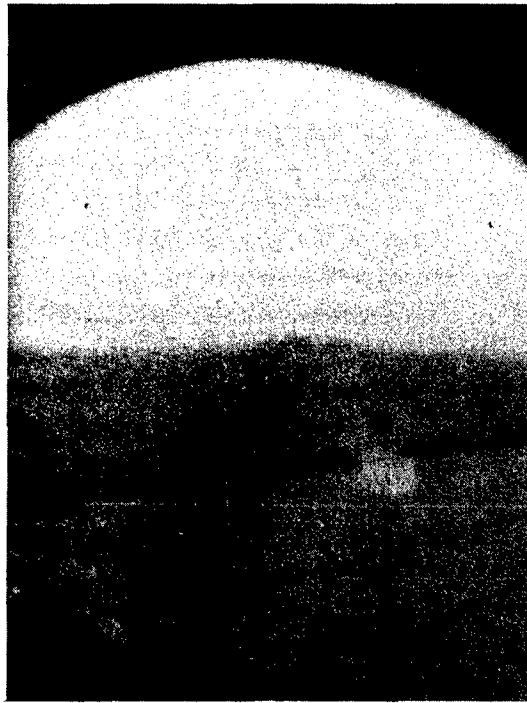


Fig. 5. FIXATION POINT, VISUAL HOVER, IN GROUND EFFECT

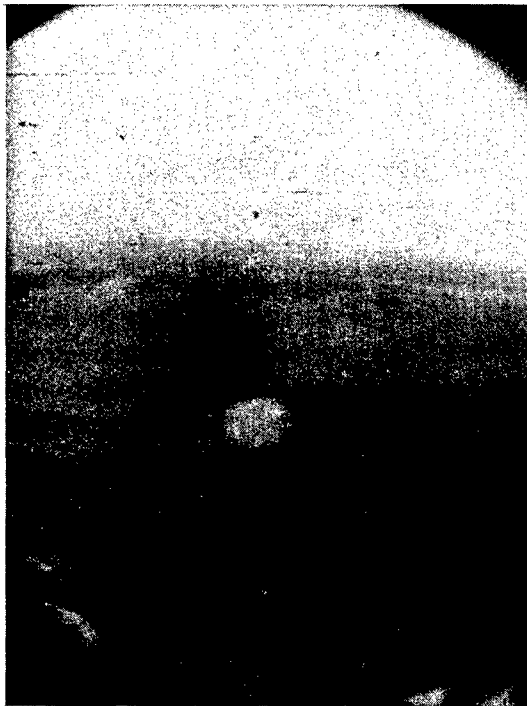


Fig. 6. FIXATION POINT, TERRAIN FOLLOWING

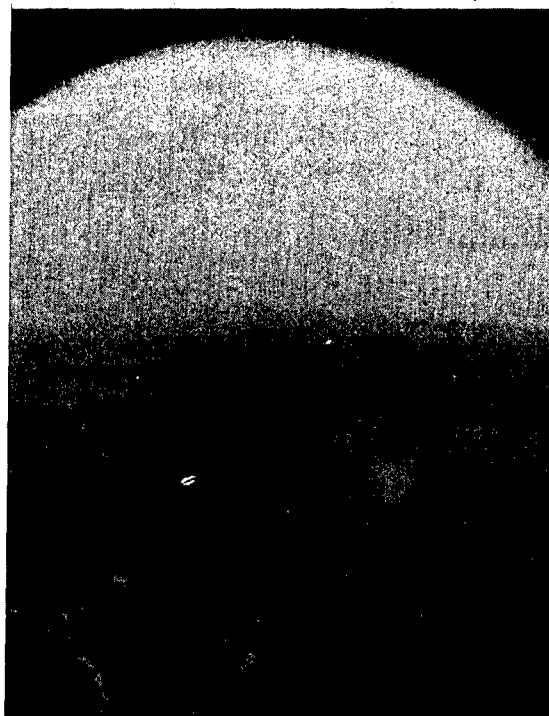


Fig. 7. FIXATION POINT, LOW LEVEL NAVIGATION

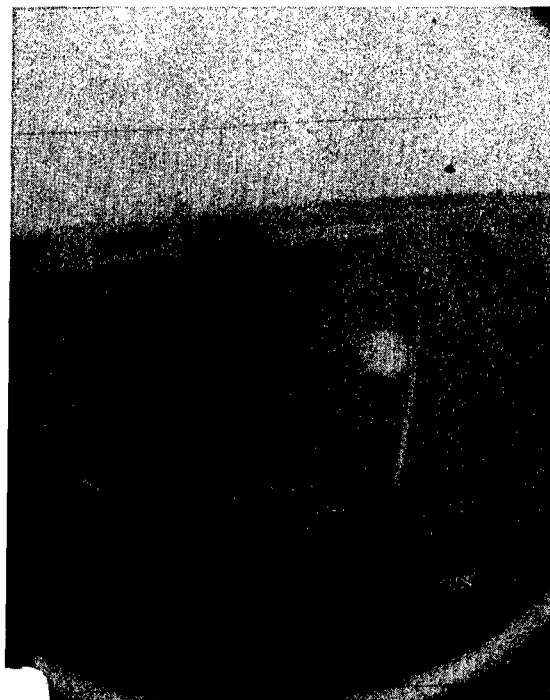


Fig. 8. FIXATION POINT, LANDING APPROACH

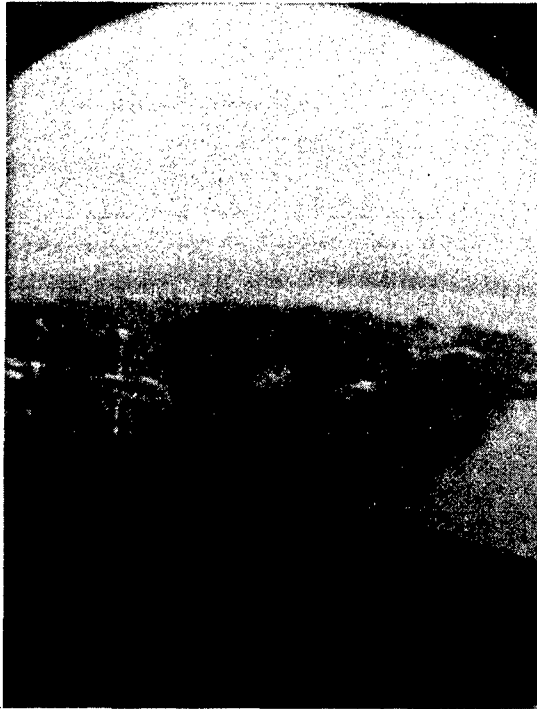


Fig. 9. FIXATION POINT, VISUAL HOVER, OUT OF GROUND EFFECT



Fig. 10. FIXATION POINT, STEEP APPROACH

One task which was not covered in the study was formation-flight IFR. A current report by Anderson, et al., (1) on this task gives the following results of a simulator study:

The subjects were asked to estimate the percentage of time they spent observing the various instruments in both display formats. Table 19 summarizes the estimates for the Integrated Electronic Vertical Display and Table 20 the flight director display.

TABLE 19

Mean Percent Time Spent on Various Instruments

| Instrument | Mean % Time |
|-------------------------------|-------------|
| IEVD | 53 |
| Bearing Distance Heading Ind. | 4 |
| Airspeed Indicator | 6 |
| Horizontal View of Formation | 7 |
| Rate of Climb Dial | 2 |
| Altitude Indicator | 28 |

TABLE 20

Mean Percent Time Spent on Various Instruments

| Instrument | Mean % Time |
|--|-------------|
| Flight Director (incl. airspeed command) | 48 |
| Rate of Climb Dial | 4 |
| Bearing Indicator | 4 |
| Airspeed Indicator | 3 |
| Horizontal View of Formation (TV) | 10 |
| Altitude Indicator | 31 |

The subjects that provided this information were five U. S. Army helicopter pilots assigned to Fort Snelling AADS, St. Paul, Minnesota.

During all of the real-world cue tasks, approximately two percent of the time was spent cross-checking the instruments, with emphasis on the engine condition group. The use of the FM antenna as a sighting device has its origins in the gunnery tasks as a reference sight for rocket firing, according to the pilots interviewed, and its use as a general sighting device has persisted. It just happens that from the pilot's seat the use of this antenna as a sighting device provides accurate information concerning the heading of the aircraft.

Several information needs were evolved from the interviews that can be satisfied by instrumentation. The expression of a need for an over-the-ground movement indicator was almost universal. In the hover tasks and very slow speed tasks, there is no accurate information available to the pilot concerning his movement in relation to the ground. For rotary wing aircraft this information should be the value of the velocity vector in the horizontal plane. Several of the subjects expressed a desire for including the Torque and RPM indicators in the flight instrument group. This preference indicates that the information should be presented to the pilot in conjunction with the attitude, altitude, vertical velocity, and airspeed information now presented by the flight group. This type of presentation would reduce the scanning task load of the pilot.

The study has not included the information requirements of such areas as communications, armament, defenses, navigation, fuel management/cruise control, trim, and radio/radar landing systems. Communication equipment and usage will depend upon future conditions and state-of-the-art, neither of which this study was equipped to handle. Armament and defense systems are in the same category as communications. Navigation was not listed as a separate requirement as the present equipment in the aircraft which is used for navigation (compass and airspeed indicator) was included. Future onboard navigation systems may change the source of navigation information but it is doubtful if the overall percentage of time usage will change. The fuel management/cruise control was a part of the engine condition information requirement. Trim was not applicable to the UH-1 and AH-1 aircraft used for this study. Trim will be a consideration for a dual-rotor aircraft and possibly for single-rotor designs other than that used on the UH-1 and AH-1. Radio/radar landing systems for future aircraft will depend upon the state-of-the-art and on what is installed in the aircraft or at the ground station, or on both. The scope of this study was such that these items could not be included.

DISCUSSION

A comparison of the results of this study with those of a current study in the same area can be made using the Terrain Following (TF) task. A study by Pelton (9) states:

The basic items of information required for TF control of an aircraft are:

1. The elevation angle and range to all portions of the terrain profile and obstacles on or nearby the future ground track of the aircraft within ranges required for aircraft control.
2. The magnitude and direction of the vector velocity of the aircraft.
3. Aircraft attitude (pitch and roll).
4. Aircraft attitude rates (to provide control system damping).
5. Aircraft vertical acceleration.
6. Aircraft clearance above the terrain.

In addition, information is needed on the static and dynamic constraints applied to the TF solution.

The subjects of this study, all of whom had performed this type of task, classified terrain following as a 100 percent external-source task; 45 percent indicated the need for precise information about airspeed, altitude (terrain clearance), and turn rate; 55 percent wanted precise steering information in addition to the visual cues; only nine percent felt that they needed precise information on attitude and vertical velocity. In addition to these items, which agree with Pelton (9), the results point out other areas of concern. Forty-five percent of the pilots indicated concern about torque and to a lesser extent, the other power/engine conditions. The sources that the pilots actually used while performing terrain following are given in Table 2. The internal sources of information were attitude indicator, altimeter, airspeed, compass, vertical velocity, torque, RPM, and engine instruments. Each of these accounted for two percent of the actual flight time, while 85 percent of the time was used observing the real world, i.e., external sources of information.

A second area called "Cruise, Visual", in this study, and "Nav" in the Pelton (9) study can also be compared. Pelton says:

The basic items of information required for Nav control are:

1. The actual position and heading of the aircraft.

2. The desired position and heading of the aircraft.

The difference between these items is used to generate corrections in heading and speed to minimize the position and heading error which exists.

In practice, it is necessary to verify the accuracy of the position-reference system, and if it is in error to provide corrections by reference to known checkpoints on the ground.

From Table 3 we find a 60 percent/40 percent relationship for external/internal information sources; a 100 percent need for precise altitude, airspeed and steering information; a 64 percent mean need for precise vertical velocity information; and a 50 percent mean need for precise RPM, torque, and engine condition information. Actual flight data given in Table 2 indicates that 48 percent of the pilots' time was spent considering the real world; four percent of the time was concerned with engine instruments, torque and RPM; and approximately 10 percent of their time was used for each of the flight group instruments, with the exception of the rate of turn, which showed a one percent usage.

A study by Semple and Swartz (11) has also considered the Cruise task and they present the following:

INFORMATION REQUIREMENTS FOR MISSION PHASES 2 and 8
(Medium altitude flight to and from forward area)

Flight Control

Pitch Attitude
Roll Attitude
Yaw
Turn Rate
Barometric Altitude
Altitude Rate
Mach
Heading
Engine Performance Data

Navigation

Current Position
Destination Position
Bearing to Destination
Distance to Destination
Ground Speed
Ground Speed

Fuel Management

Fuel Quantity
Fuel Flow Rate
Distance to Destination
Ground Speed

Defenses

Radar
Infrared Sensors
ECM
IFF

These findings agree quite closely with the results of the interviews shown in Table 1, with the exception of the navigation and defenses areas, which were not considered in the interviews. The fuel management area was listed on the interview data reduction form but no pilot mentioned this specifically (fuel quantity, fuel flow) and when

they were asked the general reply was that this information was included in their engine instruments check, which is listed in this study as engine condition.

A comparison of the findings of this study and one by Williams (12) is presented in Table 4. UCAD refers to the Universal Contact Analog Display. This is a synthetically generated electronic display which provides a pictorial representation of the real world as normally seen from the cockpit window under visual flight conditions. Extensions of this concept have led to a broader interpretation of the term "UCAD" to include all television-format integrated vertical-situation displays.

A recent report on the Integrated Electronic Vertical Display (IEVD) by Woodling and Simpson (13) in which an EMC-2 eye-movement camera was used to record data from the spot hover task as performed in a simulator states the following:

Of the 60 minutes of film, only one minute was suitable for detailed analysis. Figure 3-3 shows the distribution of fixation time that was found to exist for this 60-second hover trial. The height of each block is proportional to the percentage of time the subject spent fixating on that area of the display surface. Approximately 75% of the time was spent in or near the circle at the center of the screen. This area is the source of information on pitch, heading, turn rate, and to some extent roll. Eight percent was spent scanning the right side of the screen where altitude and rate of climb data are presented. This consisted of six fixations averaging 0.8 seconds each. Seventeen percent was spent at the left of the screen where the airspeed tape was located. The look durations averaged 0.85 second for ten fixations which are observed.

Although this data is based on the only film that could be analyzed quantitatively, a qualitative impression after viewing all of the film indicates that these data are not typical. The tendency for the fixation to rest in the center is apparent throughout, and the majority of film indicates that most scanning occurs along the horizontal center line of the screen.

The time-in-use figures from the actual spot hover task given in Table 2 indicate that 46 percent of the pilot's time was used obtaining attitude, heading and turn rate information; 24 percent of the time was concerned with rate of climb and altitude; and seven percent of the time was concerned with airspeed. In addition, 39 percent of the time was spent observing the engine and power condition indicators i.e., RPM and torque and engine instruments.

A point brought out by several of the pilots interviewed concerning the method of obtaining steering information was that generally a radio beam was used as the primary steering reference. Such a beam should not be considered as a primary steering reference for combat use at the expense of a passive steering reference such as the compass system, which is not subject to jamming.

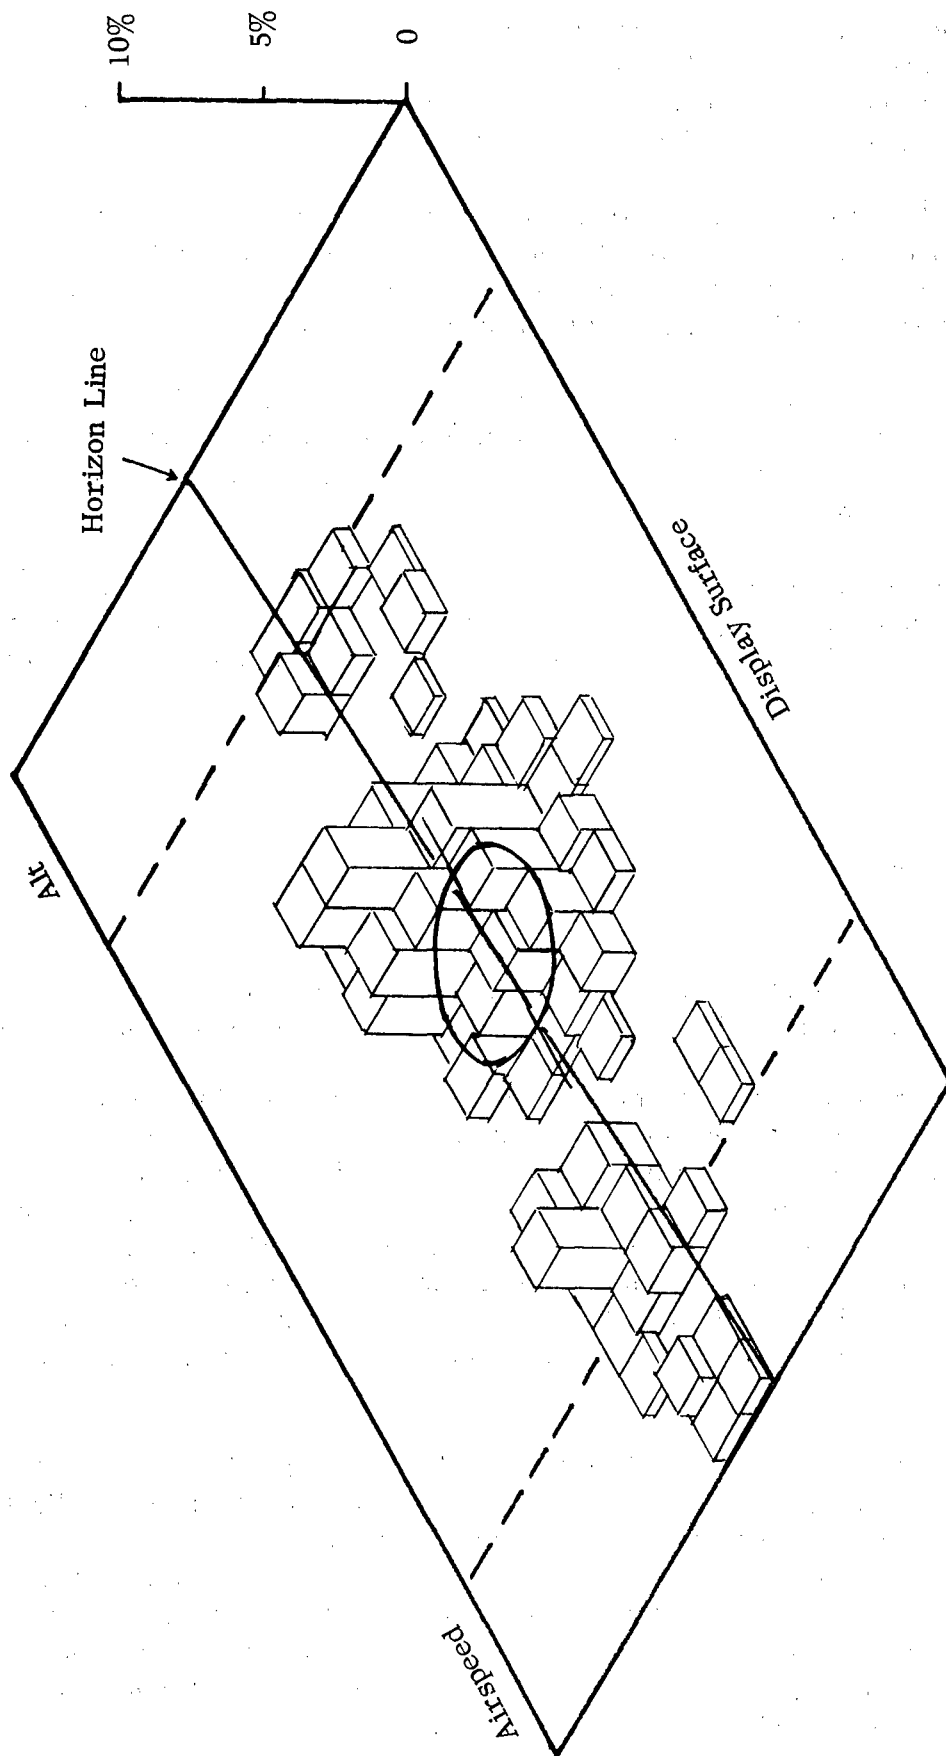


Fig. 11. FIXATION POINTS IEVD
(Referred to as Figure 3-3 in text)

The portion of the time spent considering the real world was primarily concerned with keeping track of the aircraft's flight path, actual, desired, and projected, by constant cross-reference between map and ground checkpoints. The attitude of the vehicle in relation to a horizontal reference was also considered.

A pilot generally reports that he uses the horizon as his attitude reference, but from the film data obtained in this study, it was found that at low altitude (<500 ft. absolute) the subjects consistently used a line on the ground which was essentially parallel to the horizon as a reference line for attitude and rate of closure.

Several items of information which would be required in specific flight phases have not been listed as yet in the study. Weather conditions enroute and at destination are required for safety. Fuel-management data is also certainly required information, as well as present position of the aircraft.

The subjects who had flight experience in the AH-1 expressed an opinion that this aircraft was much easier to fly than the UH-1, primarily because of its greater speed, but they said the information required to perform the given tasks was essentially the same.

SUMMARY

The study has shown what basic flight information the UH-1 pilot felt he needed to perform specific maneuvers and what instruments he used to obtain this information.

It has also determined what instruments the pilots actually used in flight to perform many of these tasks and the amount of time he spent using these instruments during each maneuver. Two typical missions of a tactical utility helicopter have been presented, maneuver by maneuver, and the estimated time spent using each of these instruments has been determined from experimental data. The need for certain information not now available with present instrumentation has been indicated. No attempt has been made to indicate in what form the various information should be presented nor have specialized areas such as armament, communications, defense, navigation, etc., been considered.

The techniques used in this study should be employed to expand the data base already established by increasing the sample size of the actual flight use of the displays now installed in U. S. Army helicopters. They should also be considered for the evaluation of new concepts such as the headup types, the contact-analog types, the television types, etc., and any other approach to information transfer that concerns the pilot of an aircraft, the operator of a vehicle, or the operator of any equipment where it is essential to present to the operator a large amount of data that must be visually screened to satisfactorily perform the desired task.

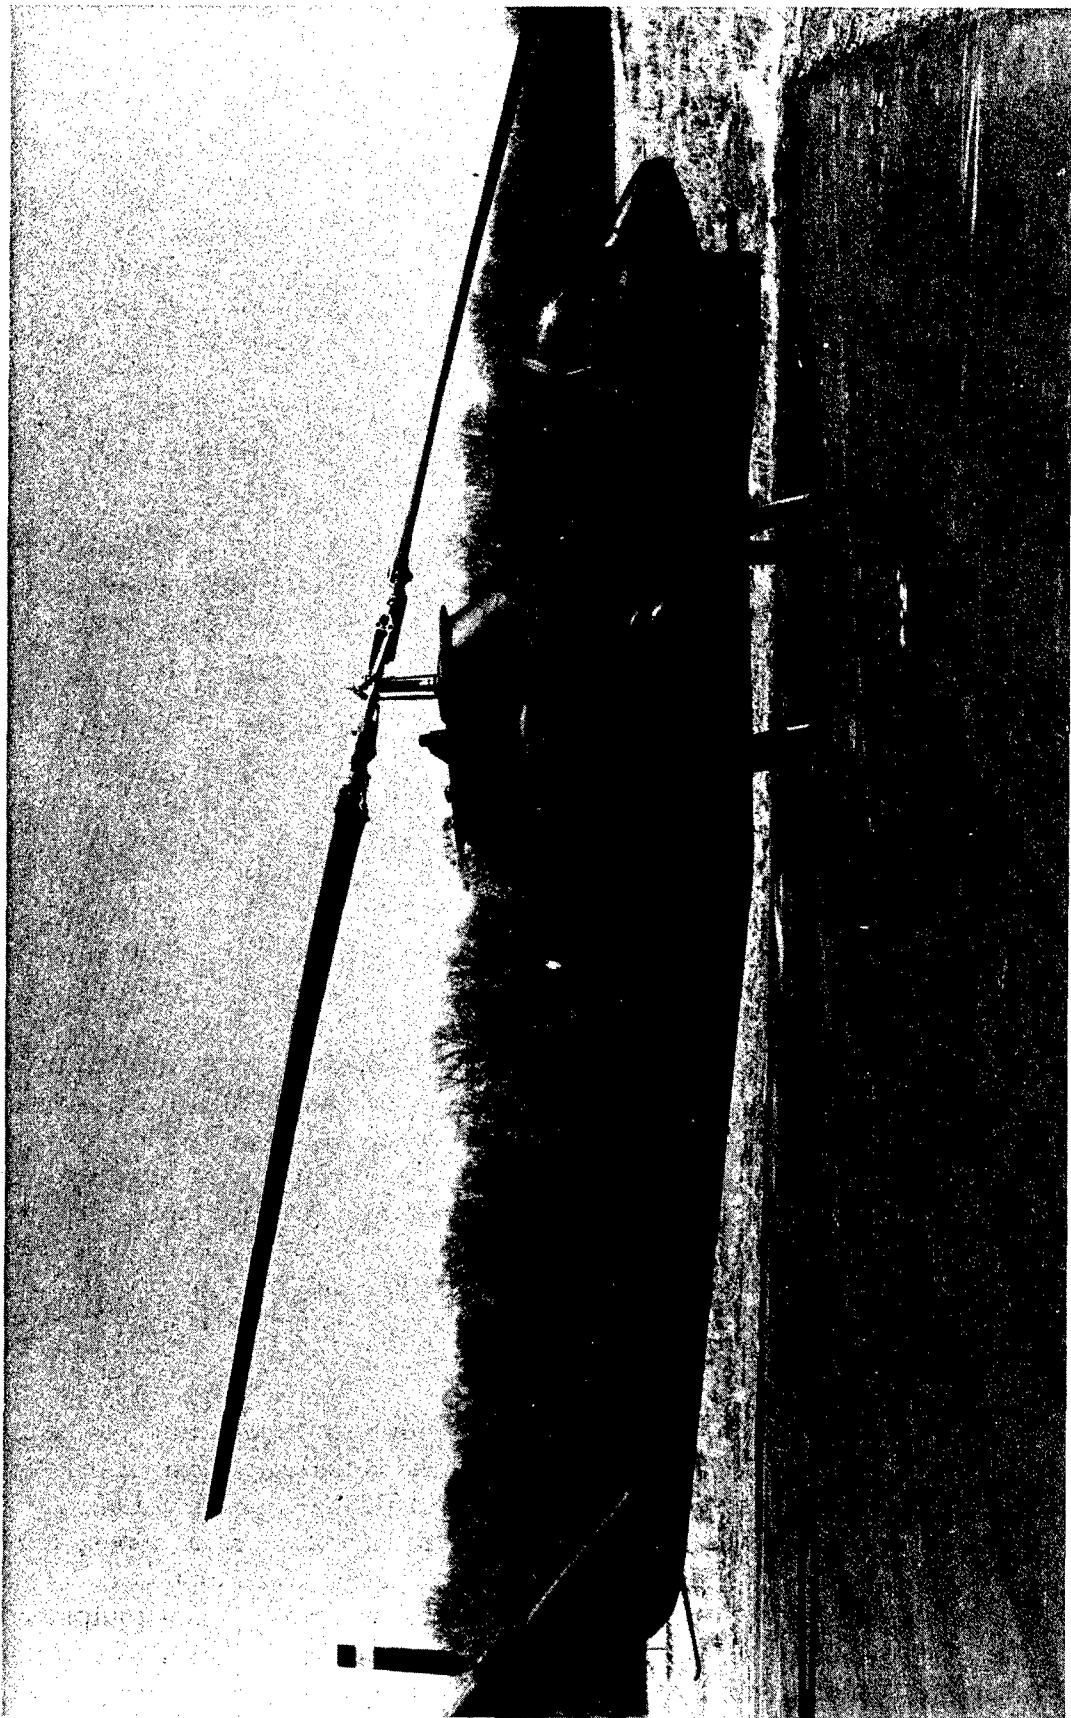


Fig. 12. AH-1

REFERENCES

1. Anderson, P. A., Toivanen, M. L., & Hoppe, R. B. IFR formation flight display/system requirements for advanced rotary wing and jet fighter aircraft. Joint Army-Navy Aircraft Instrumentation Research, Office of Naval Research, Washington, D. C., June 1969.
2. Behan, R. A., & Sicilliani, F. A. The landing task and pilot acceptance of displays for landing in reduced weather minimums. AIAA Paper No. 65-722. Serendipity Associates, Shatsworth, Calif., 1965.
3. Brown, J. E., Bertone, C. M., & Obermayer, R. W. Army aircraft voice-warning system study. Technical Memorandum 6-68, U. S. Army Human Engineering Laboratories, Aberdeen Proving Ground, Md., 1968.
4. Dunlap & Associates, Inc. An examination of pilot information requirements. Douglas Aircraft Company, Long Beach, Calif., 1962. (AD 401662)
5. Havron, D. M., & Jenkins, J. P. Information requirements methods as applied to development of displays and consoles. Engineering Psychology Branch, Psychological Sciences Division, Office of Naval Research, Washington, D. C., 1961. (AD 257609)
6. Ketchel, J. M., & Jenney, L. L. Electronics and optically generated aircraft displays. JANAIR Report No. 680505, Joint Army-Navy Aircraft Instrumentation Research, Office of Naval Research, Washington, D. C., 1968.
7. Murphy, J. V., Pizzicara, D. J., Belcher, J. J., Hamson, R. L., & Bernberg, R. E. Integrated cockpit research program. JANAIR TR-NR213-041. Joint Army-Navy Aircraft Instrumentation Research, Office of Naval Research, Washington, D. C., 1967. Vol I (AD 662185), Vol II (AD 662186), Appendix I (AD 658753), Appendix II (AD 658754)
8. Nicholson, R. M., Wolf, J. D., & Clifford, R. R. Display requirements study for helicopter IFR formation flight. JANAIR TR-NR213-054, Joint Army-Navy Aircraft Instrumentation Research, Office of Naval Research, Washington, D. C., 1968.
9. Pelton, F. M. An analytical investigation of low altitude display/systems (U). Cornell Aeronautical Laboratories, Inc., Buffalo, N. Y., 1968. Secret
10. Sardanowsky, W., & Harper, H. P. A study of handling qualities requirements of winged helicopters. USAAVLABS TR-68-39, U. S. Army Aviation Materiel Laboratories, Fort Eustis, Va., 1968.

11. Semple, C. A., Jr., & Swartz, R. W. Time based analysis of control activities and information requirements for V/STOL. AFFDL-TR-65-193. Air Force Flight Dynamics Laboratory, Research and Technology Division, Air Force Systems Command, Wright-Patterson AFB, Ohio, 1966. (AD 480325)
12. Williams, P. Technical progress report on universal contact analog display (UCAD) research, Phase I - systems analysis. Joint Army-Navy Aircraft Instrumentation Research, Office of Naval Research, Washington, D. C., 1965. (AD 616650)
13. Woodling, H. C., Jr., & Simpson, J. A. Integrated electronic vertical display research. Joint Army-Navy Aircraft Instrumentation Research, Office of Naval Research, Washington, D. C., 1968.

APPENDIX A

TACTICAL UTILITY HELICOPTER MISSION TASKS

The task list presented to the subjects contained 96 tasks, many of which had only minor differences in parameters. It was felt that this redundancy of task descriptions would do nothing to enhance the report; therefore, the 43 tasks described below were selected as the primary tasks presented in the task list.

The following tasks are performed at ground speeds of 0 to 3 knots.

| TASK | DESCRIPTION |
|--------------------------|---|
| SPOT HOVER (IGE), VISUAL | Keep the aircraft's C.G. within a 12 ft. radius circle, attitude $\pm 5^\circ$, upwind heading $\pm 10^\circ$, and altitude ± 5 feet. |
| SPOT HOVER (IGE), VISUAL | Same as above except maintain downwind heading $\pm 10^\circ$ in 30 K winds. |
| SPOT HOVER (OGE), VISUAL | In gusts up to 10 K, VFR maintain for 3 minutes altitude ± 10 ft., C.G. within a 10 ft. radius circle, zero ground speed ± 10 K, heading and attitude $\pm 5^\circ$. |
| 360° HOVERING TURN (IGE) | Same as Spot Hover plus start and stop turn within $\pm 10^\circ$ of prescribed heading. |
| 360° HOVERING TURN (OGE) | Same as above. |
| VERTICAL CLIMB | Same as Spot Hover plus climb at 500 feet per minute to prescribed altitude ± 5 feet. |
| VERTICAL DESCENT | Same as Spot Hover plus descend to prescribed altitude ± 5 feet at 500 fpm. |

The following tasks are performed at airspeeds of 3 to 60 knots unless otherwise specified.

| | |
|---------------------|---|
| CRUISE, VISUAL | Maintain straight and level flight in light turbulence, altitude ± 20 ft., airspeed ± 5 K, heading and attitude $\pm 5^\circ$. |
| CRUISE, INSTRUMENTS | Same as above except altitude ± 50 ft. |

| TASK | DESCRIPTION |
|------------------------------|---|
| STANDARD RATE TURN | Same as above except heading, turn rate 3° per second $\pm 1^{\circ}$ per second. |
| CLIMB, 500 FEET PER MINUTE | Same as above except altitude, rate of climb ± 100 ft. |
| CLIMB FROM HOVER | Acceleration at least 3 K per second, heading and roll attitude $\pm 5^{\circ}$, and rate of climb at least 500 feet per minute. |
| CLIMB, INSTRUMENTS | Airspeed ± 10 K, heading $\pm 10^{\circ}$, rate of climb 500 feet per minute ± 100 feet per minute, and attitude $\pm 5^{\circ}$. |
| INITIAL DESCENT, VISUAL | At approach speed ± 10 K maintain 30° descent $\pm 5^{\circ}$, attitude and heading $\pm 3^{\circ}$. |
| INITIAL DESCENT, INSTRUMENTS | At approach speed ± 5 K maintain 15° descent, $\pm 3^{\circ}$, attitude and heading $\pm 3^{\circ}$. |
| FINAL APPROACH | Starting from descent at 100 ft. altitude, touch down within 20 ft. of desired spot at less than 5 ft./sec. sink rate and 0-10 K ground speed, maintain upwind heading $\pm 10^{\circ}$, roll attitude $\pm 5^{\circ}$. |
| ASSAULT LANDINGS | From cruise speed at 1500 ft. altitude, come to landing within 15 ft. of desired spot at less than 5 ft./sec. sink rate and 0-10 K ground speed in no more than 75 sec., maintaining downwind heading $\pm 5^{\circ}$. |
| DECELERATION | At least 3 K/sec. |
| REVERSE DIRECTION OF FLIGHT | At any airspeed above 60 K establish 15° /sec. turn rate, $\pm 3^{\circ}$ /sec., in no more than 5 sec., maintaining airspeed ± 10 K and altitude within -20 to + 50 ft. |

| TASK | DESCRIPTION |
|---------------------------|---|
| GUNNERY RUN | In gusts up to 10 K, and rates of descent up to 1000 fpm above 60 K. Maintain pitch attitude and heading $\pm 2^\circ$, roll attitude $\pm 5^\circ$, rate of descent ± 100 fpm. |
| TEAR DROP MANEUVER | From a speed of 60 K and a 3000 ft. altitude, establish maximum rate of turn and execute landing on point of maneuver initiation in no more than 25 sec. (low-speed assault landing touchdown requirement). |
| BREAK OFF MANEUVER | Change from 500 fpm rate of descent, ± 100 fpm, to 1000 fpm rate of climb, ± 100 fpm; and change heading 180° , $\pm 10^\circ$, at any airspeed above 60 K in no more than 15 sec. |
| AUTOROTATION, VISUAL | Starting from speed of 3 to 60 K, altitude above 300 ft., touch down within 50 ft. of desired spot, maintaining heading $\pm 15^\circ$, roll attitude $\pm 5^\circ$, touch down at less than 10 ft./sec. sink rate, and zero ground speed ± 10 K. |
| AUTOROTATION, INSTRUMENTS | Starting from speed of 3 to 60 K, altitude above 300 ft., touch down within 50 ft. of desired spot, maintaining heading $\pm 10^\circ$, roll attitude $\pm 5^\circ$, touch down at less than 10 ft./sec. sink rate, and zero ground speed ± 10 K. |

The following tasks are performed at airspeeds of 60 to 150 knots unless otherwise specified.

| TASK | DESCRIPTION |
|---------------------------------|--|
| CRUISE, VISUAL | Maintain straight and level flight in light turbulence, altitude ± 20 ft., airspeed ± 5 K, and heading and attitude $\pm 5^\circ$. |
| CRUISE, INSTRUMENTS | Same as above except maintain altitude ± 50 ft. |
| STANDARD RATE TURN | Same as Cruise except heading, yaw rate $\pm 1^\circ/\text{sec}$. |
| TERRAIN FOLLOWING, VISUAL | Follow moderate terrain features (average ridge-to-valley distance 2400 ft., average slope 7.5°) within 20 to 100 ft. at cruise speed, ± 10 K maintaining heading $\pm 10^\circ$. |
| NAP-OF-THE-EARTH FLIGHT, VISUAL | At 80 K ± 10 K, follow local terrain features with maneuvers from 0.5 to 2.5 g's, controlling flight path altitude ± 10 ft., and heading $\pm 5^\circ$. |
| CLIMB, VISUAL | Acceleration at least 3 K/sec. heading and roll attitude $\pm 5^\circ$ rate of climb at least 500 fpm. |
| CLIMB, INSTRUMENTS | Climb airspeed ± 10 K, heading $\pm 10^\circ$, attitude $\pm 5^\circ$, rate of climb 500 fpm, ± 100 fpm. |
| CLIMB, 500 FEET PER MINUTE | Same as Cruise except altitude, rate of climb ± 100 fpm. |

| TASK | DESCRIPTION |
|--------------------------------|--|
| DESCENT, INSTRUMENT | From cruise, establish a rate of descent of 500 fpm, ± 100 fpm, attitude $\pm 5^\circ$, airspeed ± 10 K, heading $\pm 10^\circ$. |
| STANDARD RATE TURN, INSTRUMENT | Turn $3^\circ/\text{sec.}$ $\pm 1^\circ/\text{sec.}$ at 500 fpm rate of descent, ± 100 fpm, maintaining airspeed ± 10 K, attitude $\pm 5^\circ$. Roll out at desired heading $\pm 10^\circ$. |
| TARGET TRACKING | Maintain pitch attitude and heading $\pm 2^\circ$, roll attitude $\pm 5^\circ$, rate of descent ± 100 fpm at rates of descent up to 1000 fpm. |
| TARGET ACQUISITION | Stabilize change in heading of 20° in no more than 10 sec. to allowances in target tracking. |
| BREAK OFF MANEUVER | Change from 1000 fpm rate of descent, ± 100 fpm, to 2000 fpm rate of climb, ± 100 fpm, and change heading 180° , $\pm 10^\circ$, at any airspeed above 60 K in no more than 15 sec. |
| ACCELERATION | Accelerate to cruise speed ± 10 K at an average of at least 2 K/sec., maintaining roll attitude $\pm 5^\circ$, heading $\pm 10^\circ$. |
| REVERSE DIRECTION OF FLIGHT | Maintain airspeed ± 5 K and altitude ± 20 ft. in a $3^\circ/\text{sec.}$, $\pm 1^\circ/\text{sec.}$, turn. |
| TEARDROP MANEUVER | From cruise, establish maximum rate of turn and pass over point of maneuver initiation, maintaining airspeed ± 10 K and altitude ± 20 ft. in no more than 30 sec. |
| GUNNERY RUN | In gusts up to 10 K, and rates of descent from 0 - 1000 fpm, above 60 K. Maintain pitch attitude and heading $\pm 5^\circ$, roll attitude $\pm 5^\circ$, rate of descent ± 100 fpm. |

| TASK | DESCRIPTION |
|---------------------------|--|
| AUTOROTATION, VISUAL | At any airspeed, up to V_{max} , establish engine-out rate of descent of 500 fpm, ± 100 fpm. Maintain pitch and roll attitude $\pm 5^\circ$, heading $\pm 10^\circ$. |
| AUTOROTATION, INSTRUMENTS | At any airspeed, up to V_{max} , establish engine-out rate of descent of 500 fpm, ± 100 fpm. Maintain pitch and roll attitude $\pm 5^\circ$, heading $\pm 5^\circ$. |

Both of the experimental pilots were briefed to fly three missions; one using Flight Plan I, one using Flight Plan II. A backup mission was flown in case one of the planned missions developed trouble. During the flight phase each pilot experienced a film breakage; therefore, the pilots flew one mission each, using Plans I and II.

Tables 1A and 2A give Mission Plan I and Mission Plan II. Figures 1A and 2A show Flight Profile I and Flight Profile II. Tables 3A through 6A give the missions as flown and the actual times involved. It can be seen that both mission plans were followed quite closely with the only deviation being the addition of three minutes of terrain following to Plan II in place of the vertical descent. It was felt that the vertical descent had been done in Plan I and not adding to the experiment while the terrain following did add to the data.

The results of the interviews were recorded on the data-reduction form shown in Figure 3A. Each task was given a number for ease of recording and positive responses were recorded in the appropriate spaces.

TABLE 1A

Mission Plan I, Flown at 60 Knots or Less

| MANEUVER | START | END |
|-------------------------|-------|-------|
| Take Off | 00:00 | |
| Hover, IGE | 00:00 | 00:02 |
| Vertical Climb | 00:02 | 00:04 |
| Cruise, IFR | 00:04 | 00:07 |
| Standard Rate Turn, IFR | 00:07 | 00:08 |
| Climb, IFR | 00:08 | 00:09 |
| Cruise, IFR | 00:09 | 00:12 |
| 180° Turn, IFR | 00:12 | 00:13 |
| Steep Approach IFR | 00:13 | 00:15 |
| Hover, OGE, VFR | 00:15 | 00:16 |
| Vertical Descent | 00:16 | 00:18 |
| Land | | 00:19 |

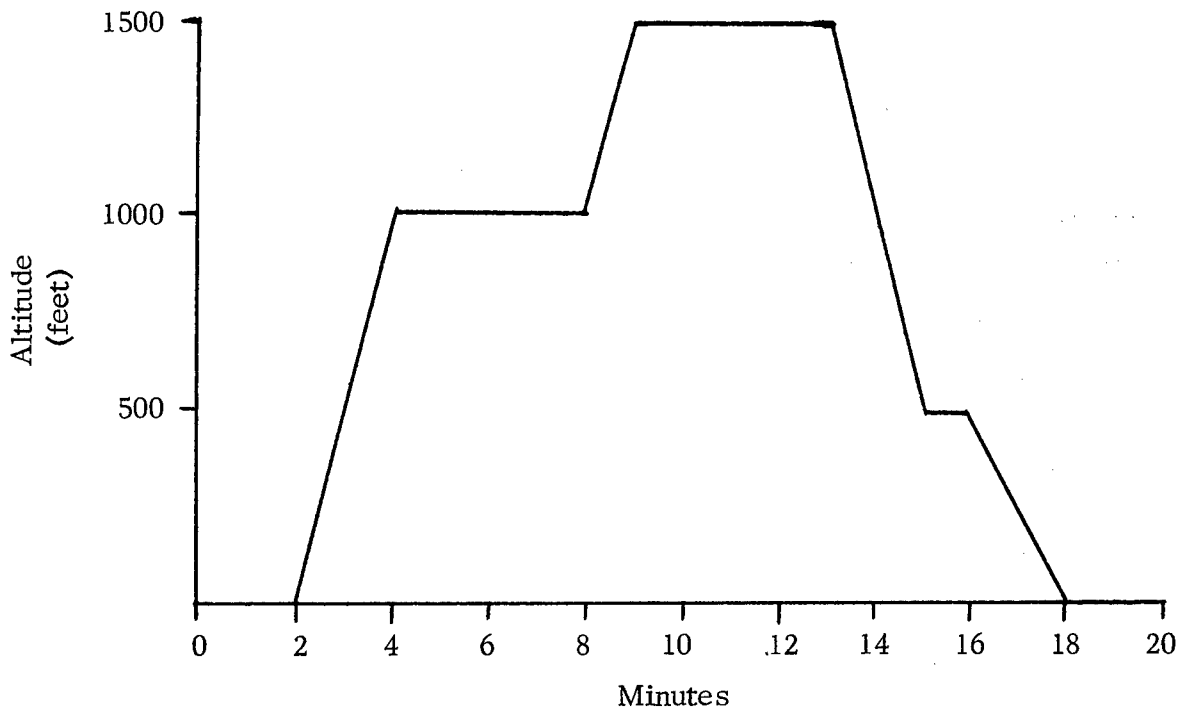


Fig. 1A. PROFILE OF MISSION PLAN I

TABLE 2A

Mission Plan II, Flown at 100 Knots or Greater

| MANEUVER | START | END |
|-------------------------|-------|-------|
| Take Off | 00:00 | |
| Climb, IFR | 00:00 | 00:03 |
| Cruise, IFR | 00:03 | 00:06 |
| Standard Rate Turn | 00:06 | 00:07 |
| Cruise, IFR | 00:07 | 00:10 |
| Descent, IFR | 00:10 | 00:12 |
| Descending Turn, IFR | 00:12 | 00:13 |
| 360° Hovering Turn, VFR | 00:13 | 00:16 |
| Descent | 00:16 | 00:18 |
| Land | | 00:19 |

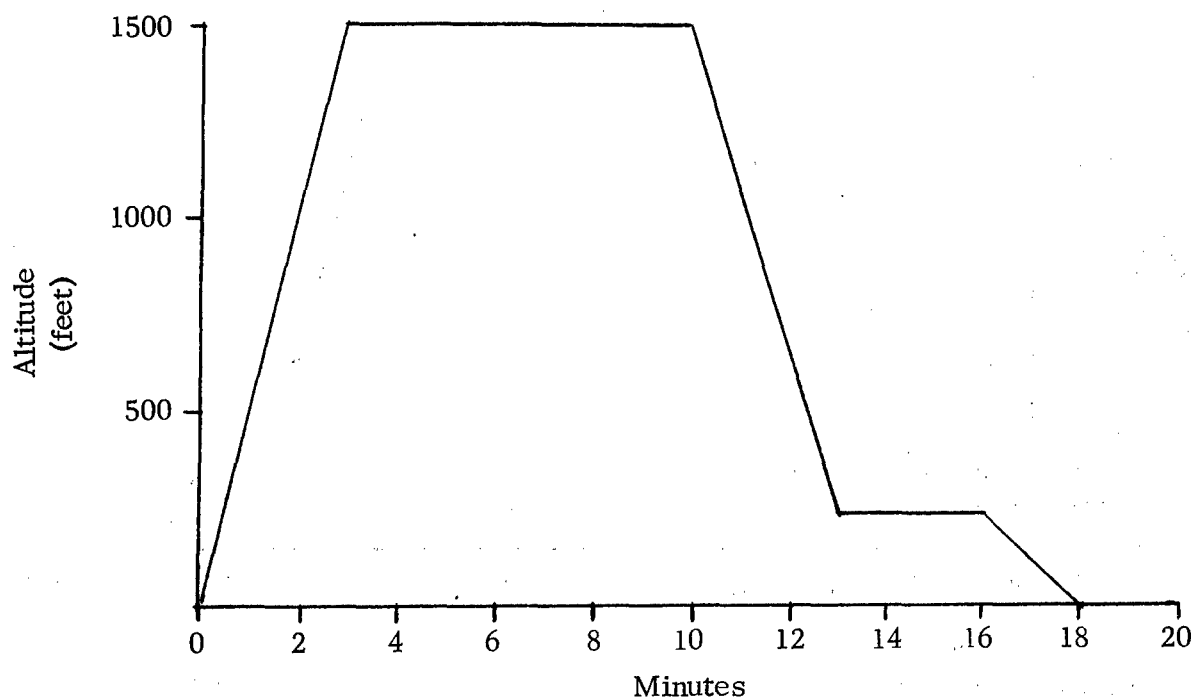


Fig. 2A. PROFILE OF MISSION PLAN II

TABLE 3A

Flight 1, Plan I, 2 June 1969

| MANEUVER | START | END |
|-------------------------|-------|-------|
| Take Off | 10:25 | |
| Camera On | 10:26 | |
| Hover, IGE | 10:27 | 10:29 |
| Vertical Climb | 10:29 | 10:31 |
| Cruise, IFR | 10:31 | 10:34 |
| Standard Rate Turn, IFR | 10:34 | 10:35 |
| Climb, IFR | 10:35 | 10:36 |
| Cruise, IFR | 10:36 | 10:39 |
| 180° Turn, IFR | 10:39 | 10:40 |
| Steep Approach, IFR | 10:40 | 10:42 |
| Hover, OGE, VFR | 10:42 | 10:43 |
| Cruise, VFR | 10:43 | 10:46 |
| Vertical Descent, VFR | 10:46 | 10:47 |
| Land | | 10:50 |
| Cameras Off | | 10:50 |

TABLE 4A

Flight 3, Plan II, 6 June 1969

| MANEUVER | START | END |
|-------------------------|-------|-------|
| Take Off | 09:49 | |
| Cameras On | 09:49 | |
| Climb, IFR | 09:51 | 09:54 |
| Cruise, IFR | 09:54 | 09:57 |
| Standard Rate Turn, IFR | 09:57 | 09:58 |
| Cruise, IFR | 09:58 | 10:01 |
| Descent, IFR | 10:01 | 10:03 |
| Descending Turn, IFR | 10:03 | 10:04 |
| Hover, OGE | 10:04 | |
| 360° Hovering Turn | 10:05 | 10:07 |
| Terrain Following | 10:07 | 10:10 |
| Land | | 10:11 |
| Cameras Off | | 10:11 |

TABLE 5A

Flight 4, Plan I, 9 June 1969

| MANEUVER | START | END |
|-------------------------|-------|-------|
| Take Off | 08:56 | |
| Cameras On | 08:57 | |
| Hover | 08:57 | 08:59 |
| Vertical Climb | 08:59 | 09:01 |
| Cruise, IFR | 09:01 | 09:04 |
| Standard Rate Turn, IFR | 09:04 | 09:05 |
| Climb, IFR | 09:05 | 09:06 |
| Cruise, IFR | 09:06 | 09:09 |
| 180° Turn, IFR | 09:09 | 09:10 |
| Steep Approach, IFR | 09:10 | 09:12 |
| Hover, OGE, VFR | 09:12 | 09:13 |
| Vertical Descent, VFR | 09:13 | 09:14 |
| Cruise, VFR | 09:14 | 09:17 |
| Land | | 09:18 |
| Cameras Off | | 09:18 |

TABLE 6A

Flight 5, Plan II, 11 June 1969

| MANEUVER | START | END |
|-------------------------|-------|-------|
| Take Off | 08:55 | |
| Cameras On | 08:55 | |
| Climb, IFR | 08:56 | 08:59 |
| Cruise, IFR | 08:59 | 09:02 |
| Standard Rate Turn, IFR | 09:02 | 09:03 |
| Cruise, IFR | 09:03 | 09:06 |
| Descent, IFR | 09:06 | 09:08 |
| Descending Turn, IFR | 09:08 | 09:09 |
| 360° Hovering Turn | 09:09 | 09:11 |
| Terrain Following | 09:11 | 09:14 |
| Land | | 09:15 |
| Cameras Off | | 09:15 |

TACTICAL UTILITY HELICOPTER INSTRUMENTS

SUBJECT _____

DATE _____

| TASK # _____ | | | | | | | | | | | |
|--------------|-------------------|--|--|--|--|--|--|--|--|--|--|
| 1 | ALTIMETER | | | | | | | | | | |
| 2 | AIRSPEED | | | | | | | | | | |
| 3 | ATTITUDE INDIC. | | | | | | | | | | |
| 4 | VERTICAL VELOC. | | | | | | | | | | |
| 5 | MAGNETIC COMPASS | | | | | | | | | | |
| 6 | STANDBY COMPASS | | | | | | | | | | |
| 7 | RADIO COMPASS | | | | | | | | | | |
| 8 | COURSE INDICATOR | | | | | | | | | | |
| 9 | BEARING/HEADING | | | | | | | | | | |
| 10 | DUAL TACHOMETER | | | | | | | | | | |
| 11 | ENGINE OIL PRESS. | | | | | | | | | | |
| 12 | ENGINE OIL TEMP. | | | | | | | | | | |
| 13 | TRANS. OIL PRESS. | | | | | | | | | | |
| 14 | TRANS. OIL TEMP. | | | | | | | | | | |
| 15 | GAS PROD. TACH | | | | | | | | | | |
| 16 | EXHAUST TEMP. | | | | | | | | | | |
| 17 | TORQUEMETER | | | | | | | | | | |
| 18 | VOLTMETER | | | | | | | | | | |
| 19 | LOADMETER | | | | | | | | | | |
| 20 | CLOCK | | | | | | | | | | |
| 21 | FUEL QUANTITY | | | | | | | | | | |
| 22 | FREE AIR TEMP. | | | | | | | | | | |
| 23 | | | | | | | | | | | |
| 24 | | | | | | | | | | | |

Fig. 3A. DATA REDUCTION FORM

APPENDIX B

TIME-BASED USE ANALYSIS

The graphs presented in this section indicate the percentage of time each instrument was used by the subject pilots while performing the particular maneuvers. They represent the sources from which the pilots satisfied their information requirements.

TIME-BASED USE ANALYSIS

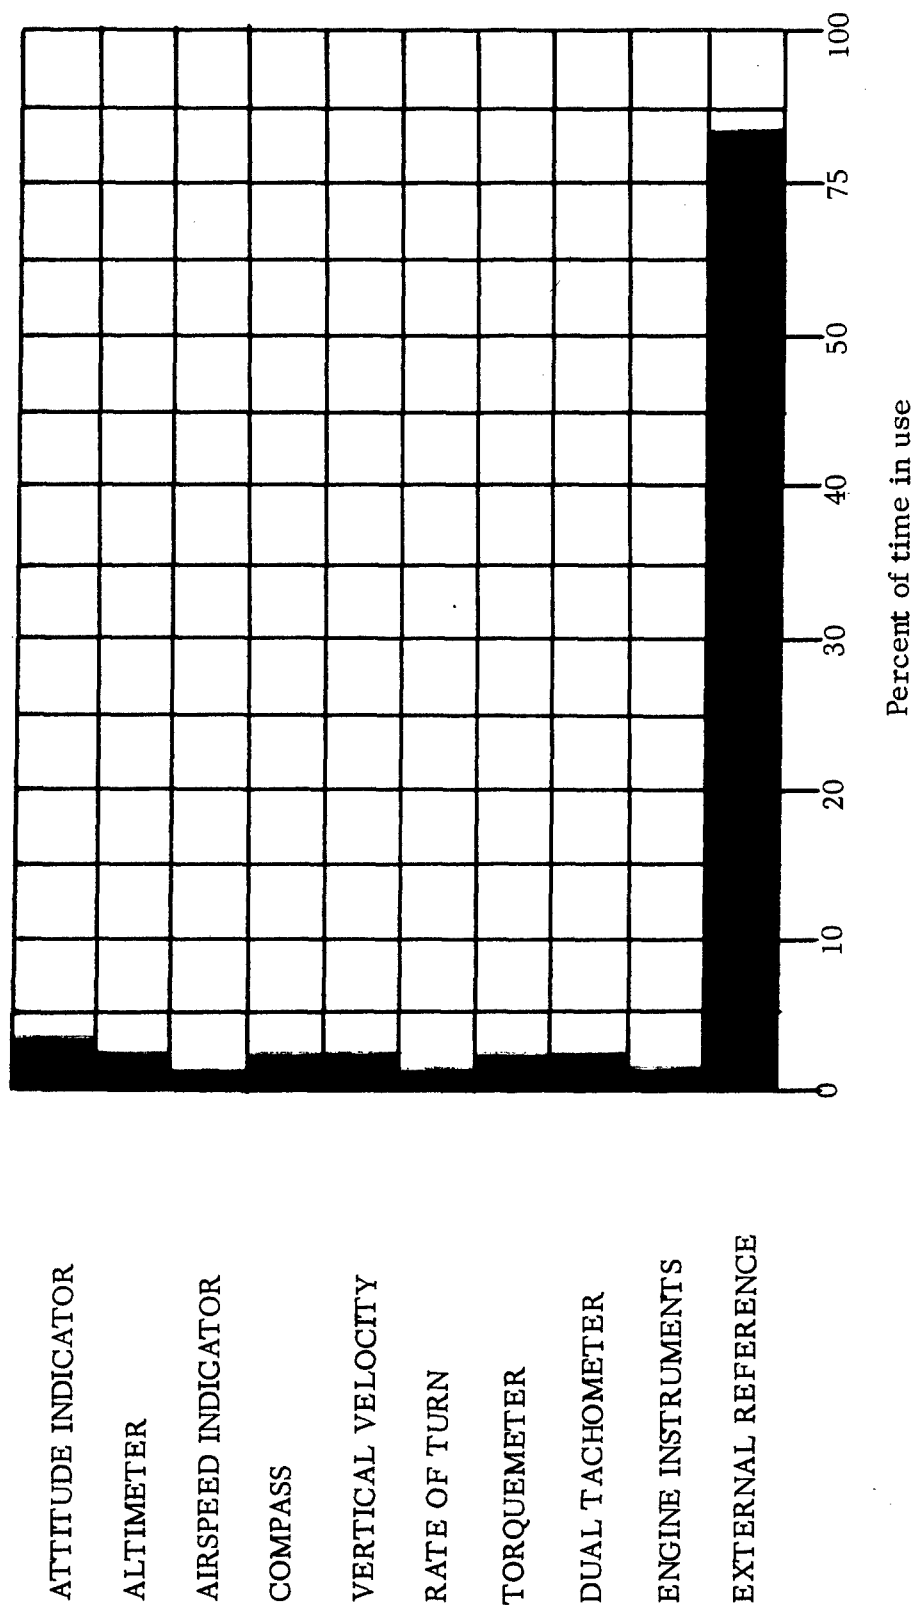


Fig. 1B. SPOT HOVER ICE

TIME-BASED USE ANALYSIS

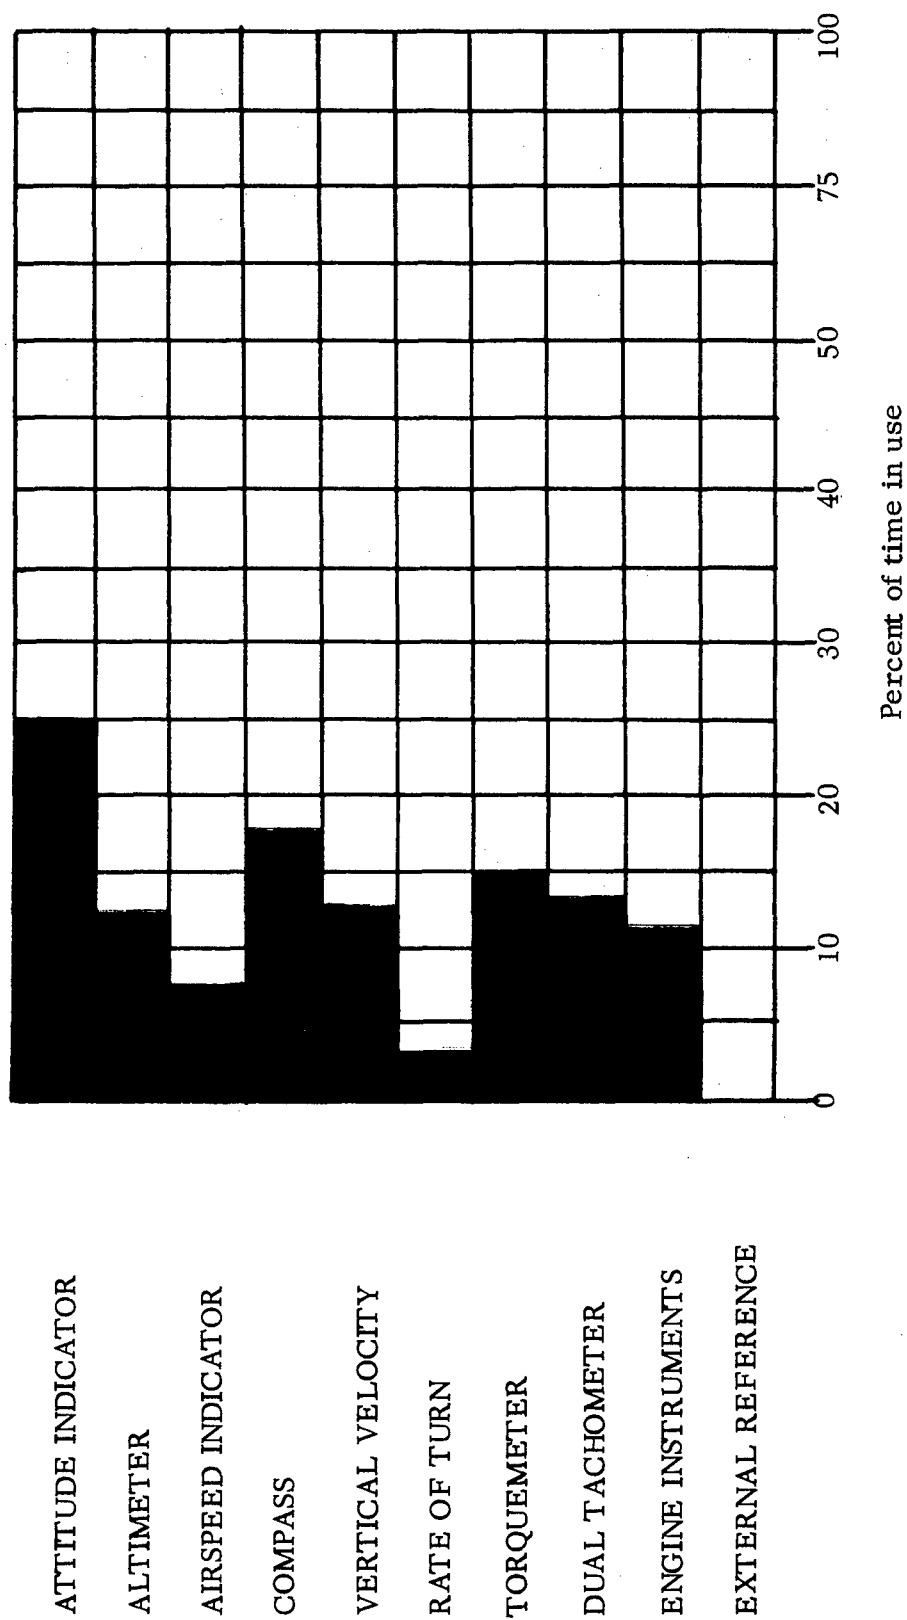


Fig. 2B. SPOT HOVER ICE (IFR)

TIME-BASED USE ANALYSIS

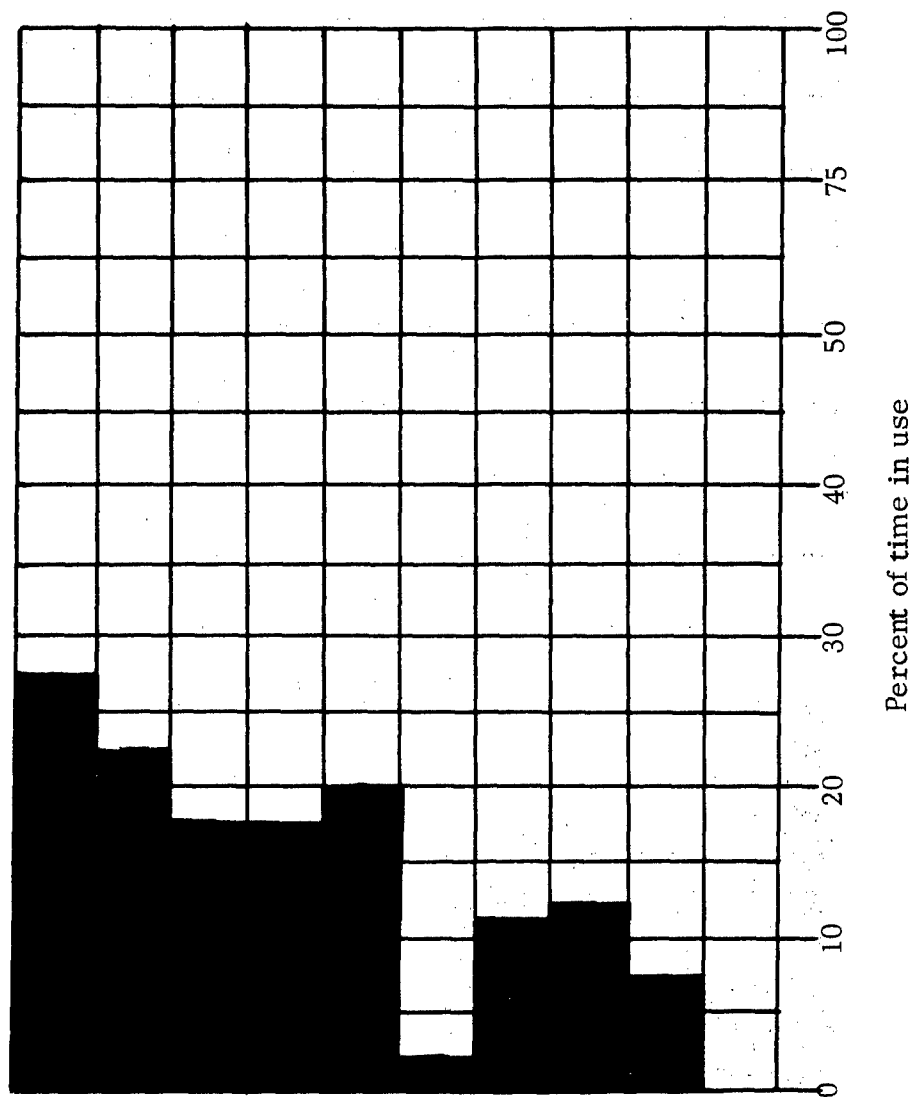


Fig. 3B. SPOT HOVER OGE

TIME-BASED USE ANALYSIS

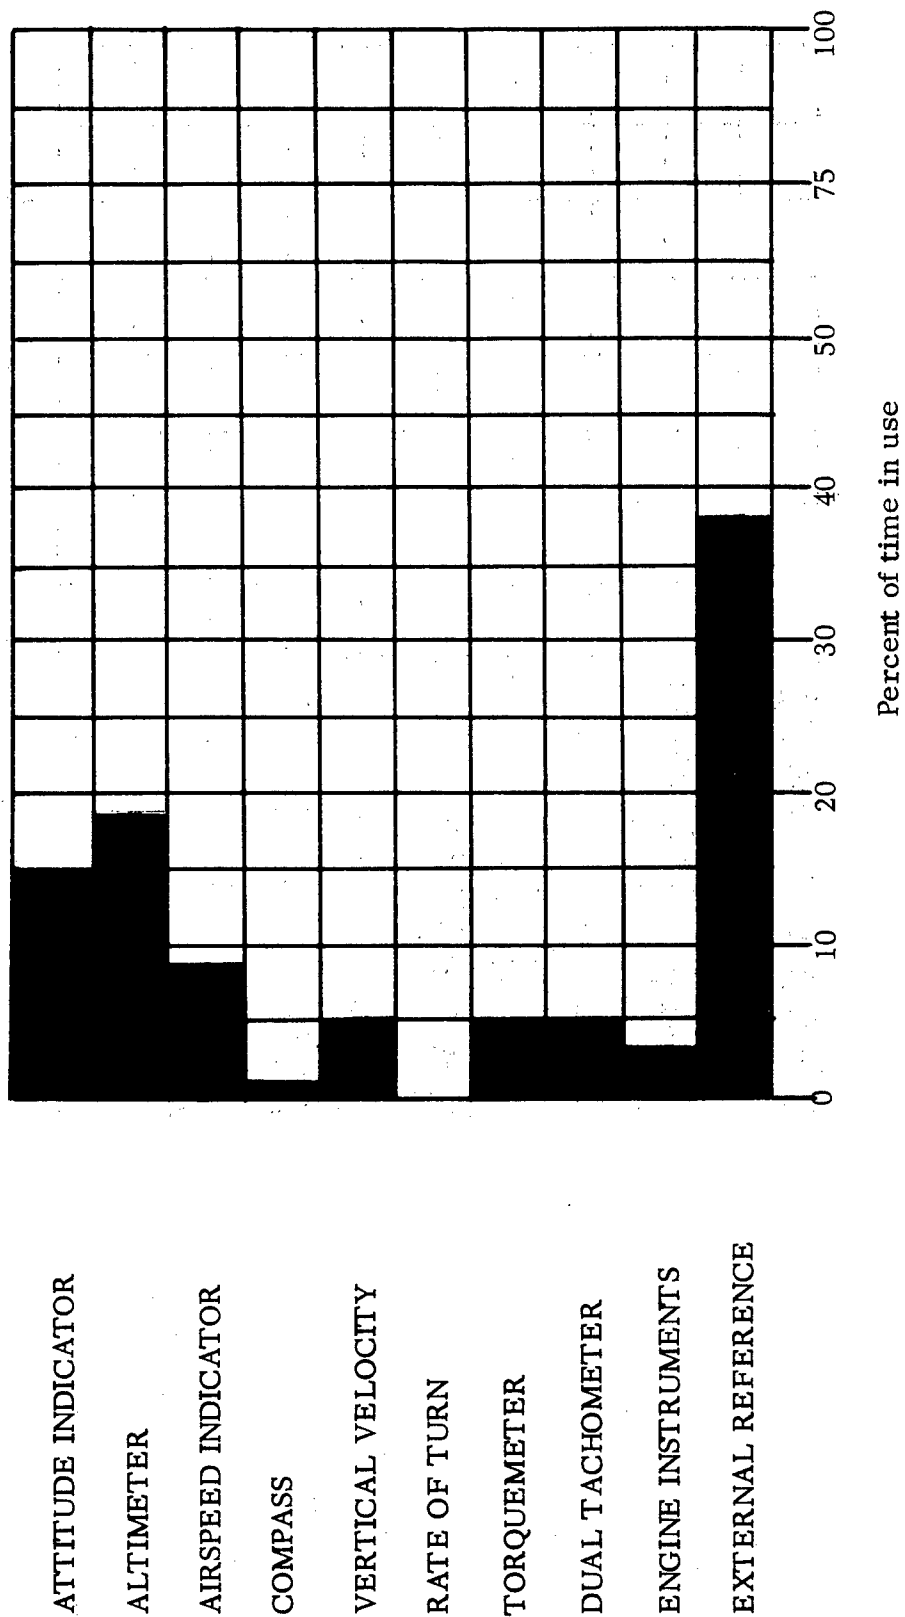


Fig. 4B. 360° HOVERING TURN OGE

TIME-BASED USE ANALYSIS

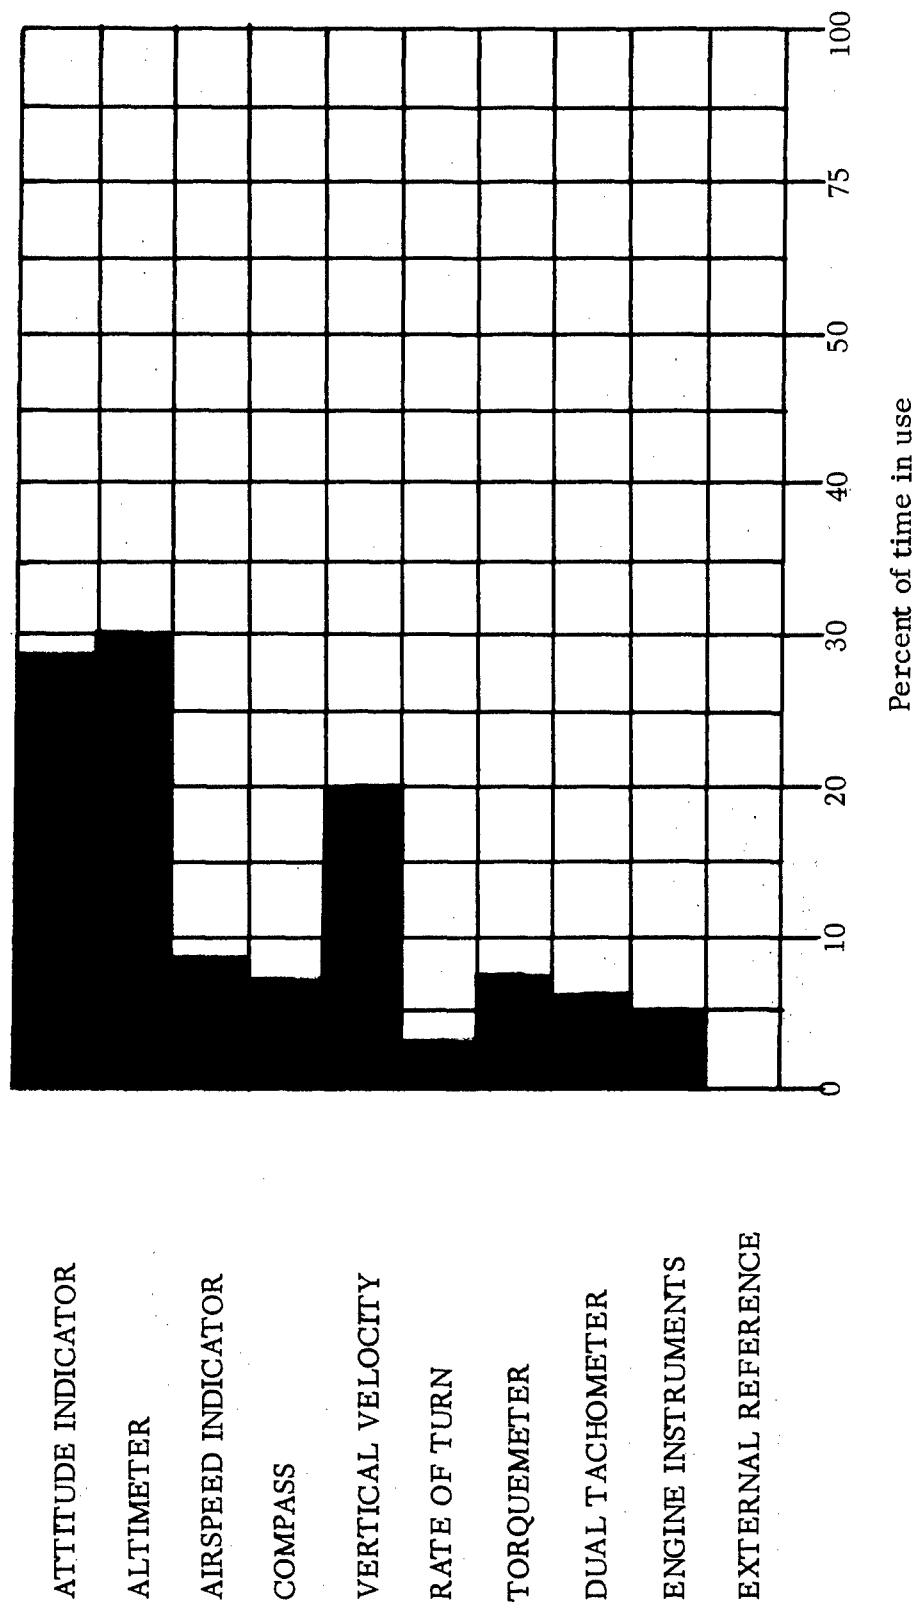


Fig. 5B. VERTICAL CLIMB

TIME-BASED USE ANALYSIS

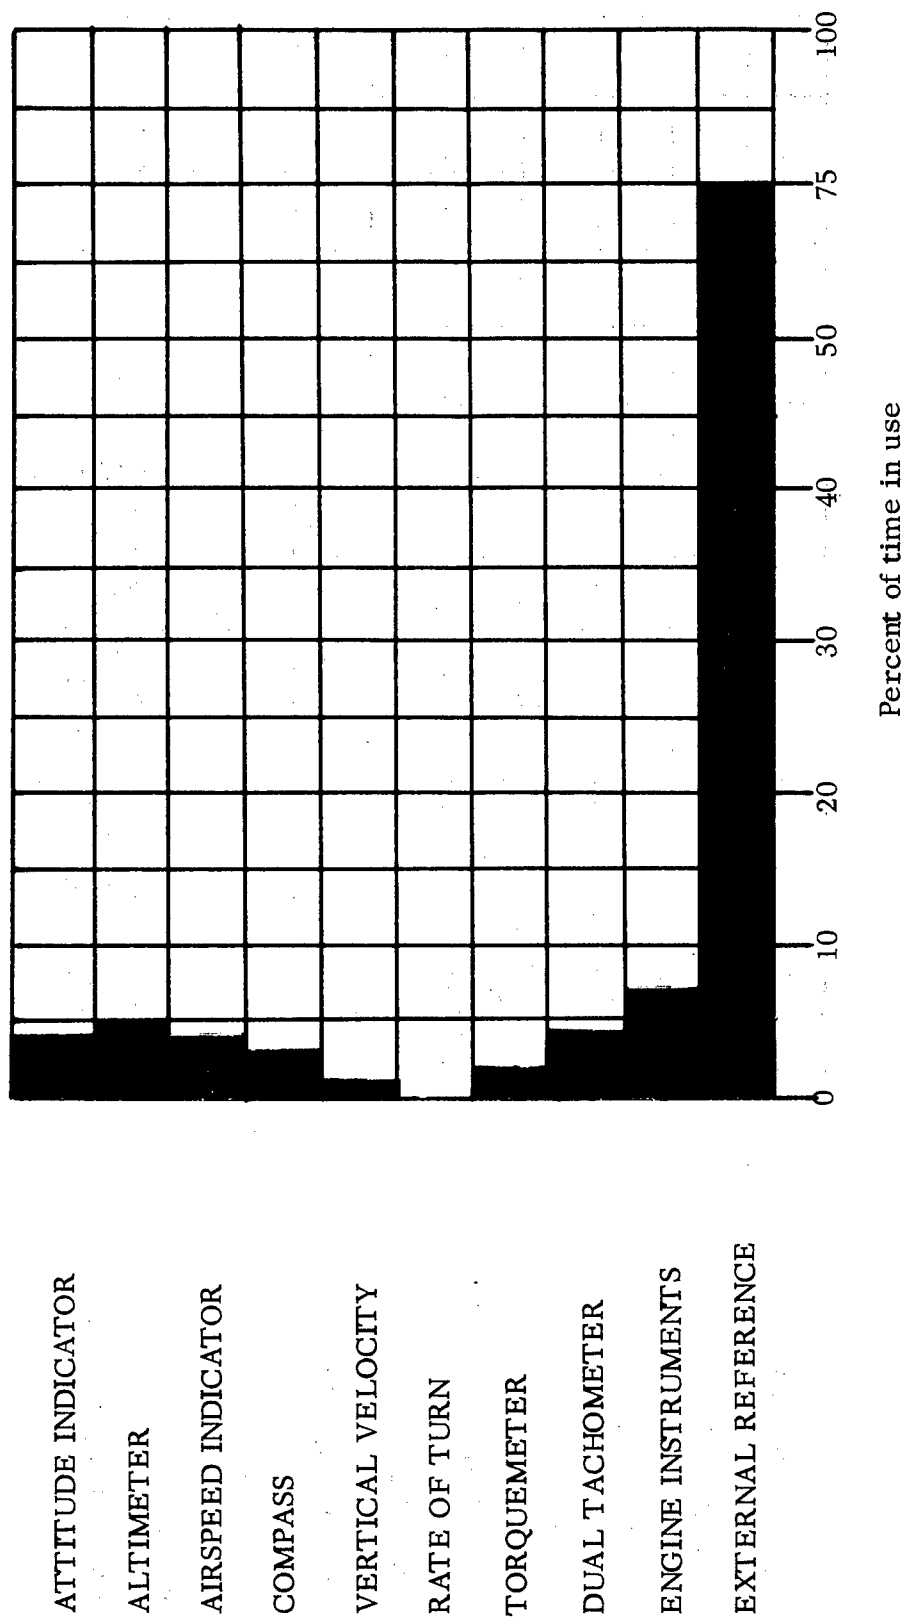


Fig. 6B. VERTICAL DESCENT

TIME-BASED USE ANALYSIS

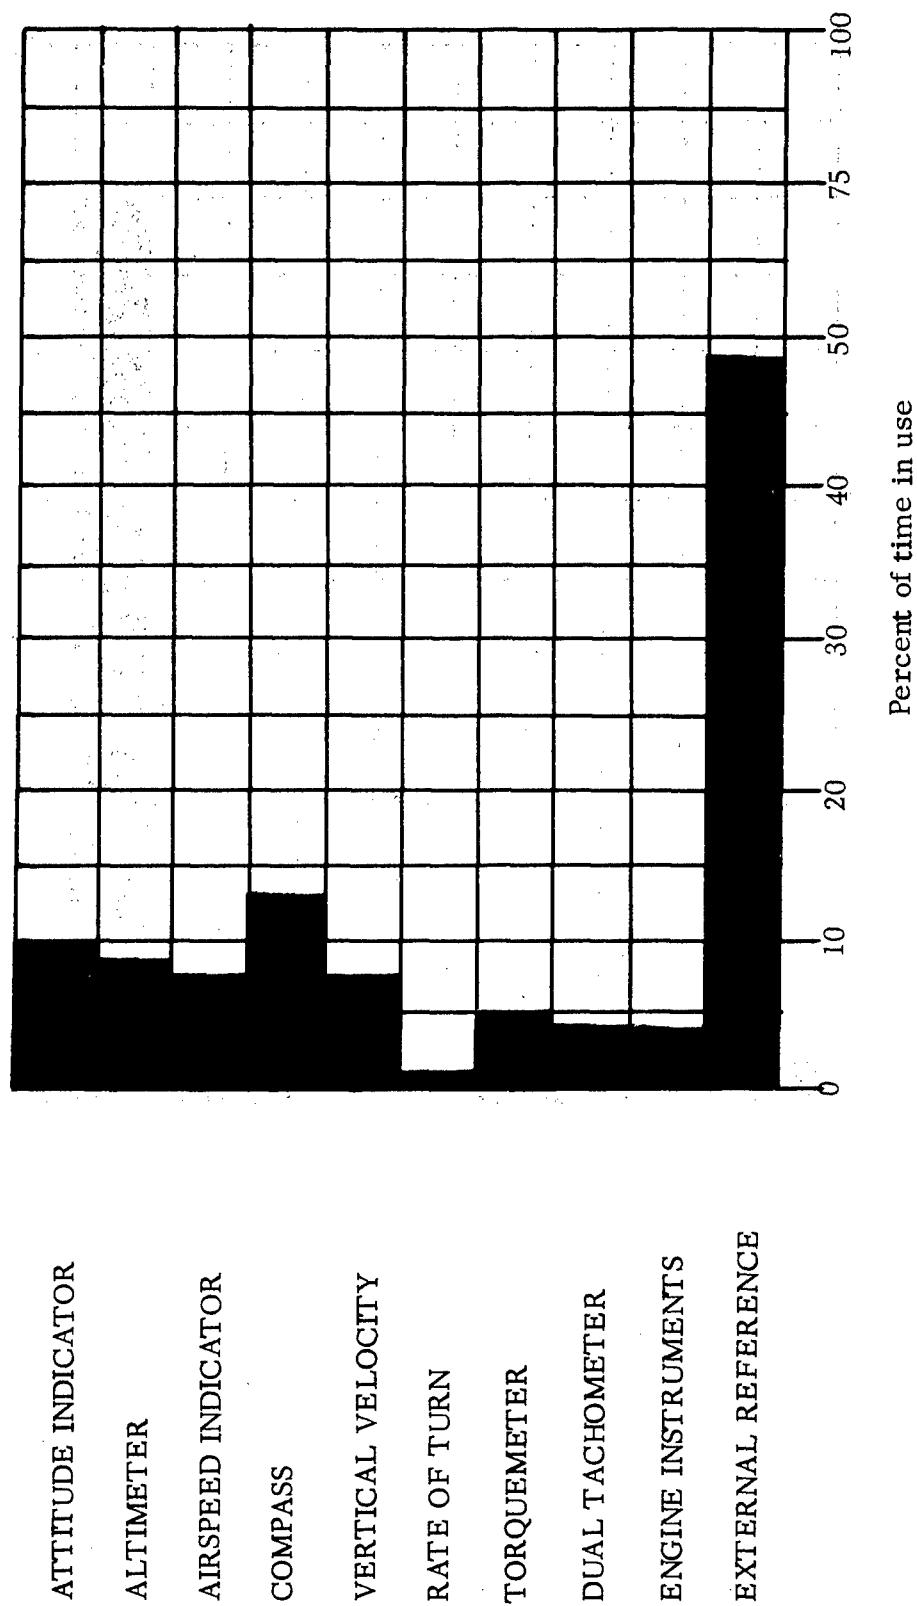


Fig. 7B. CRUISE, 60K, VISUAL

TIME-BASED USE ANALYSIS

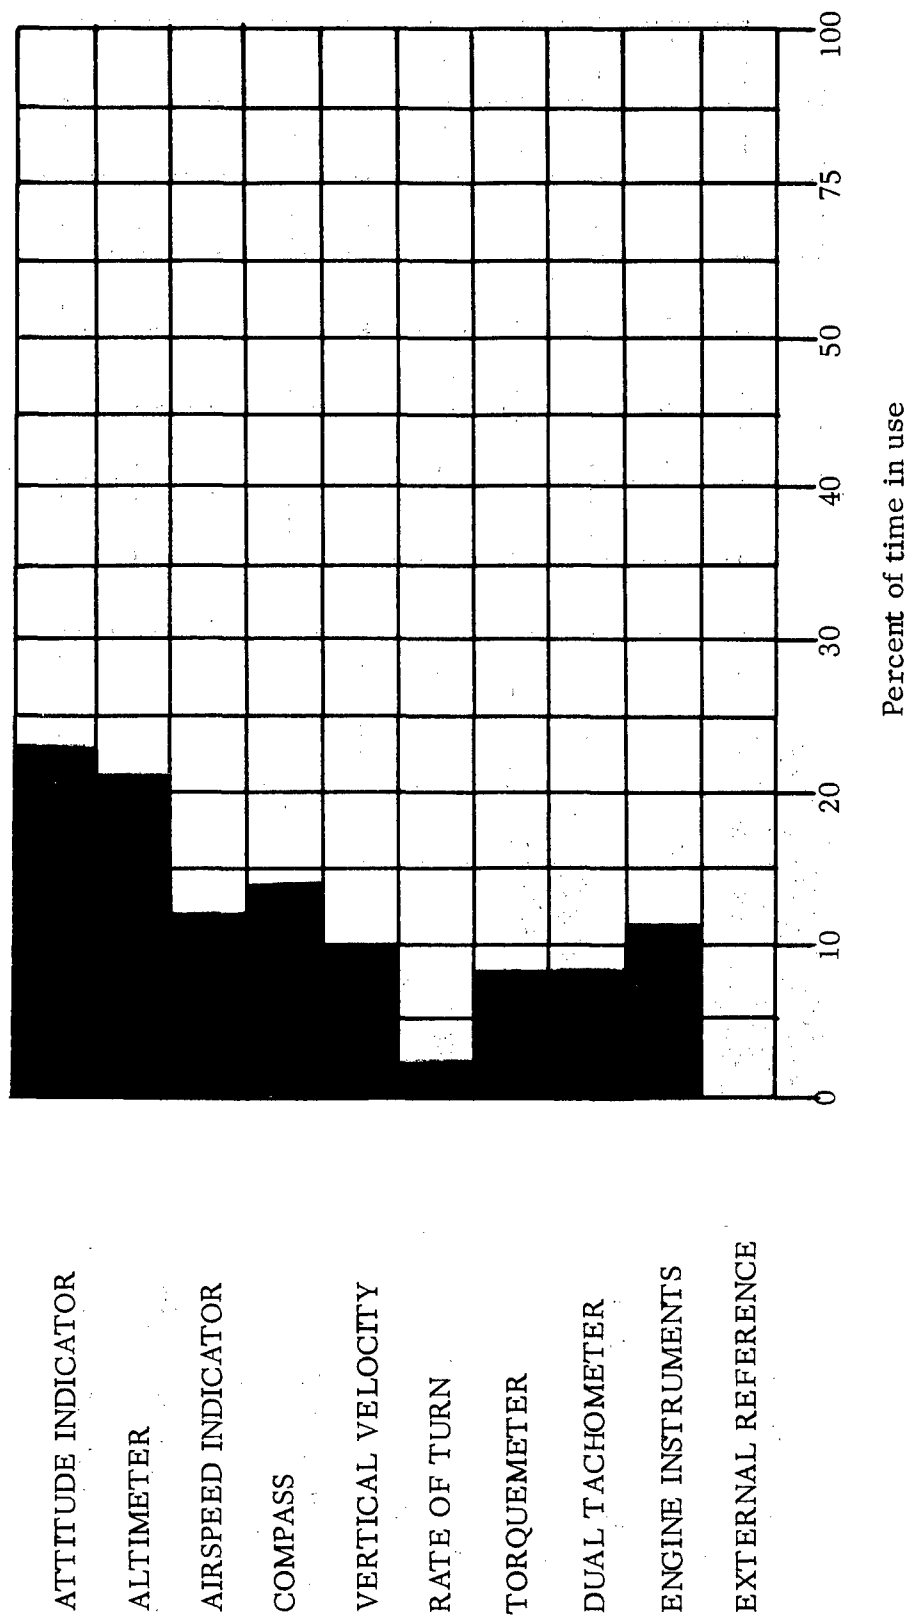


Fig. 8B. CRUISE, 60K, INSTRUMENTS

TIME-BASED USE ANALYSIS

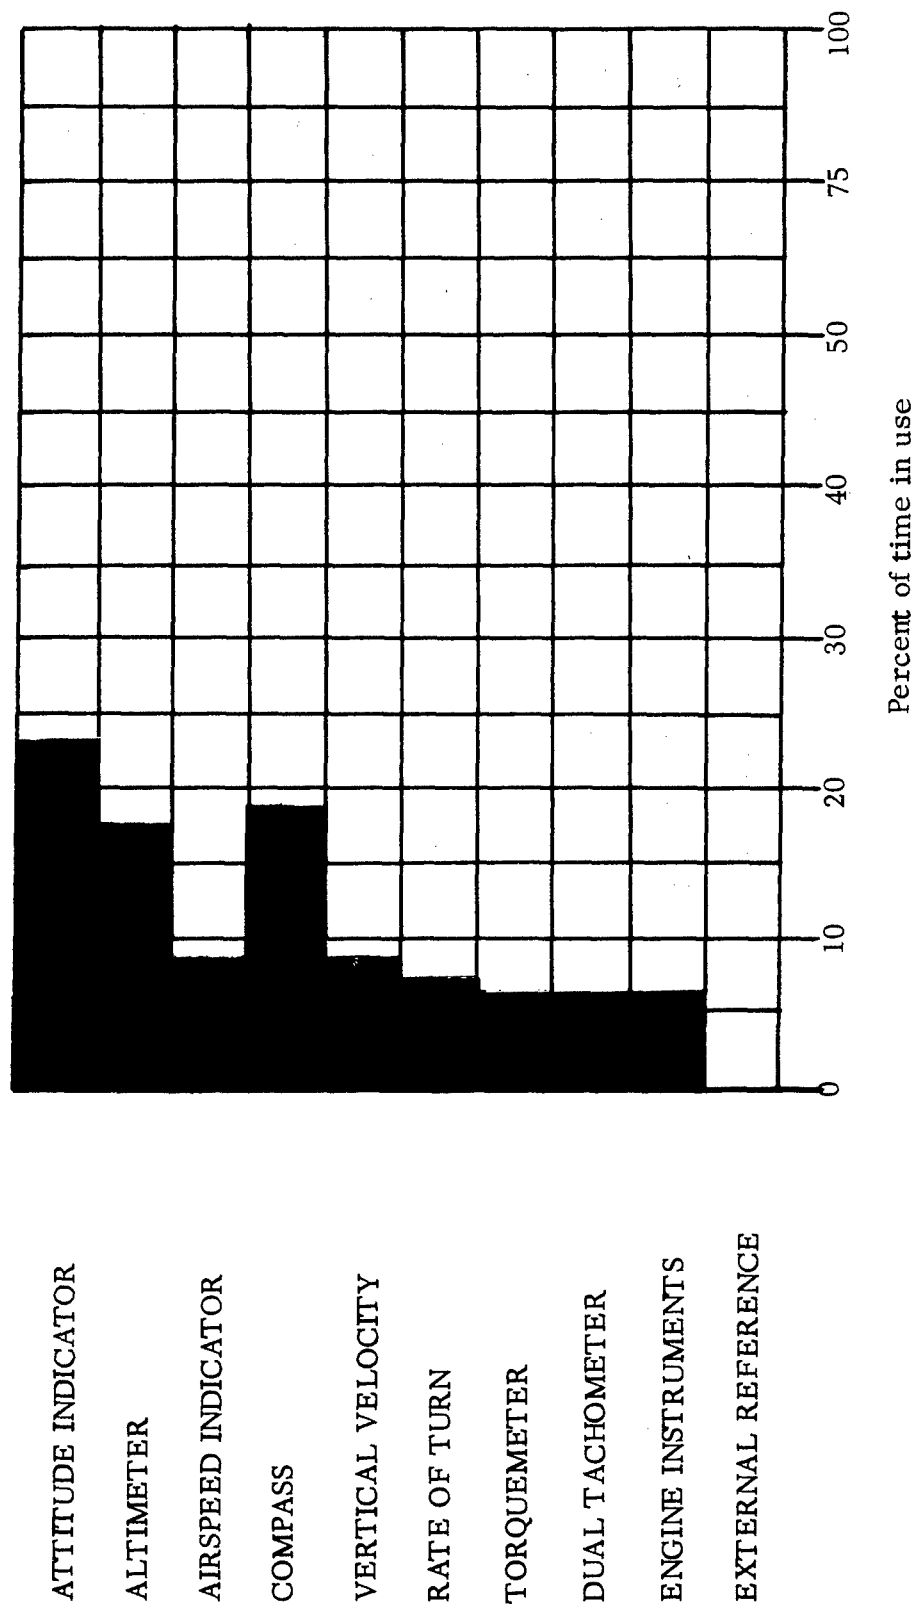


Fig. 9B. STANDARD RATE TURN, 60K

TIME-BASED USE ANALYSIS

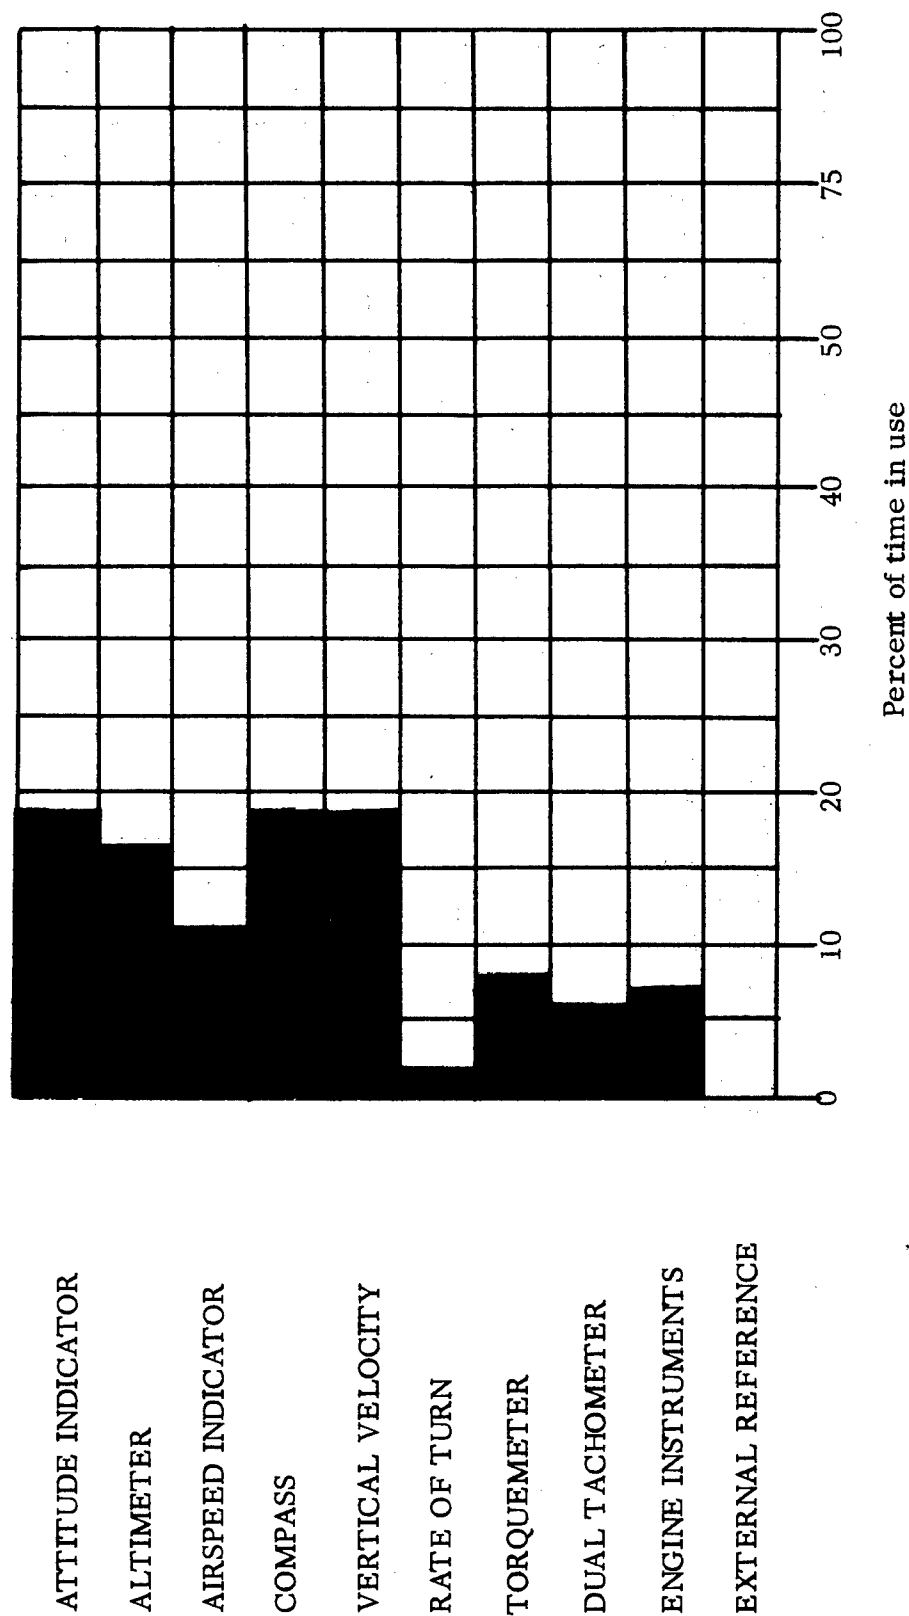


Fig. 10B. CLIMB, 60K, 500 FPM

TIME-BASED USE ANALYSIS

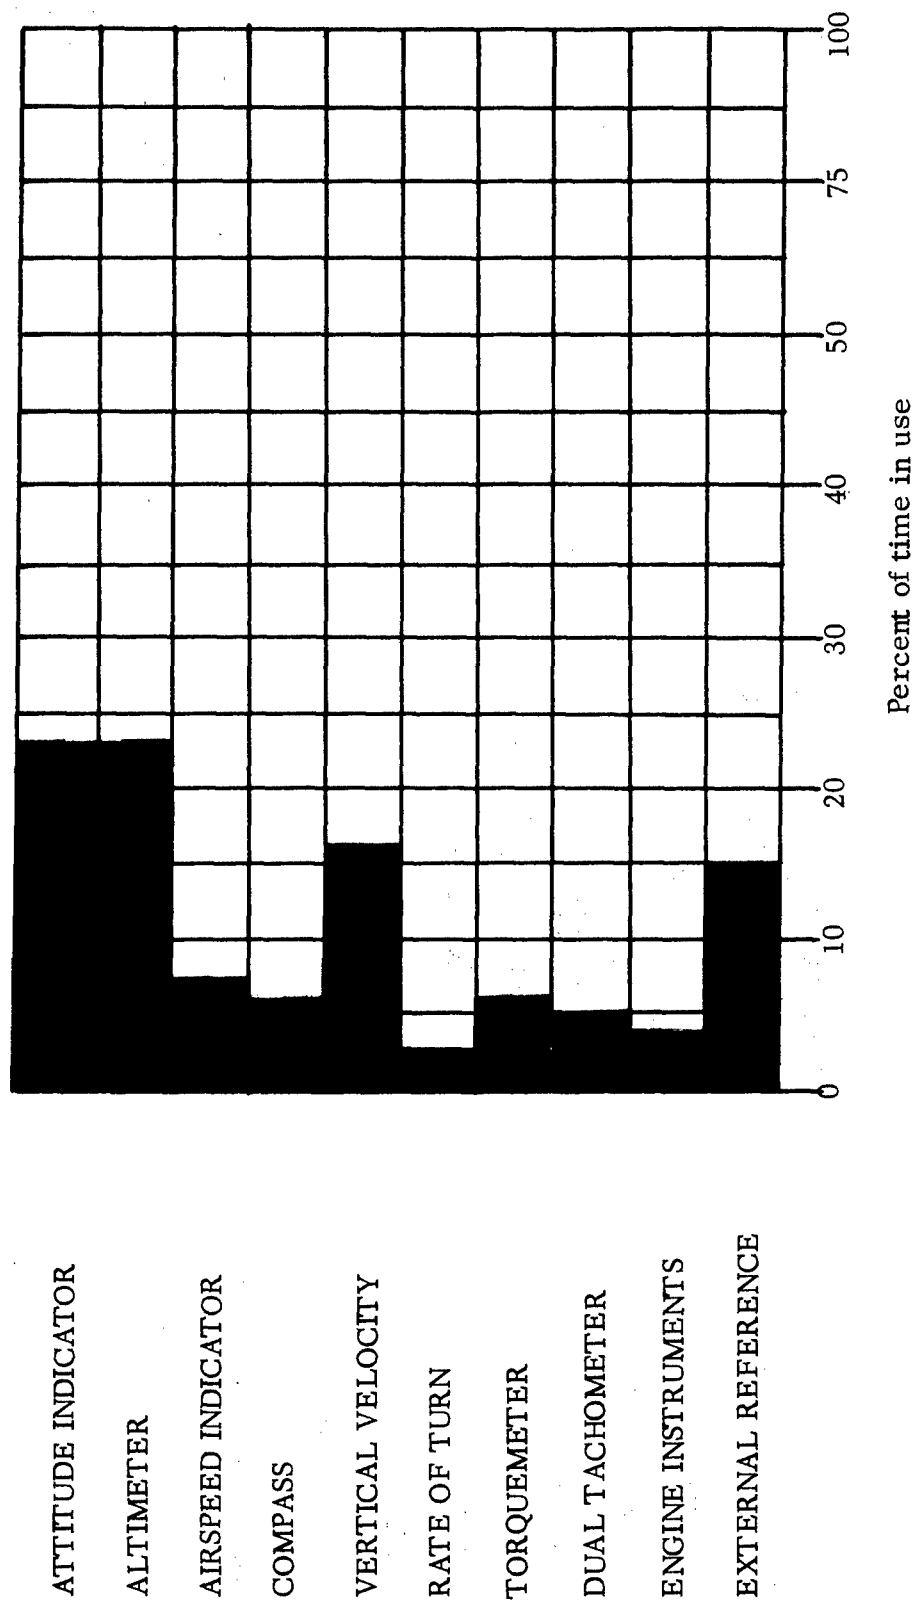


Fig. 11B. CLIMB FROM HOVER

TIME-BASED USE ANALYSIS

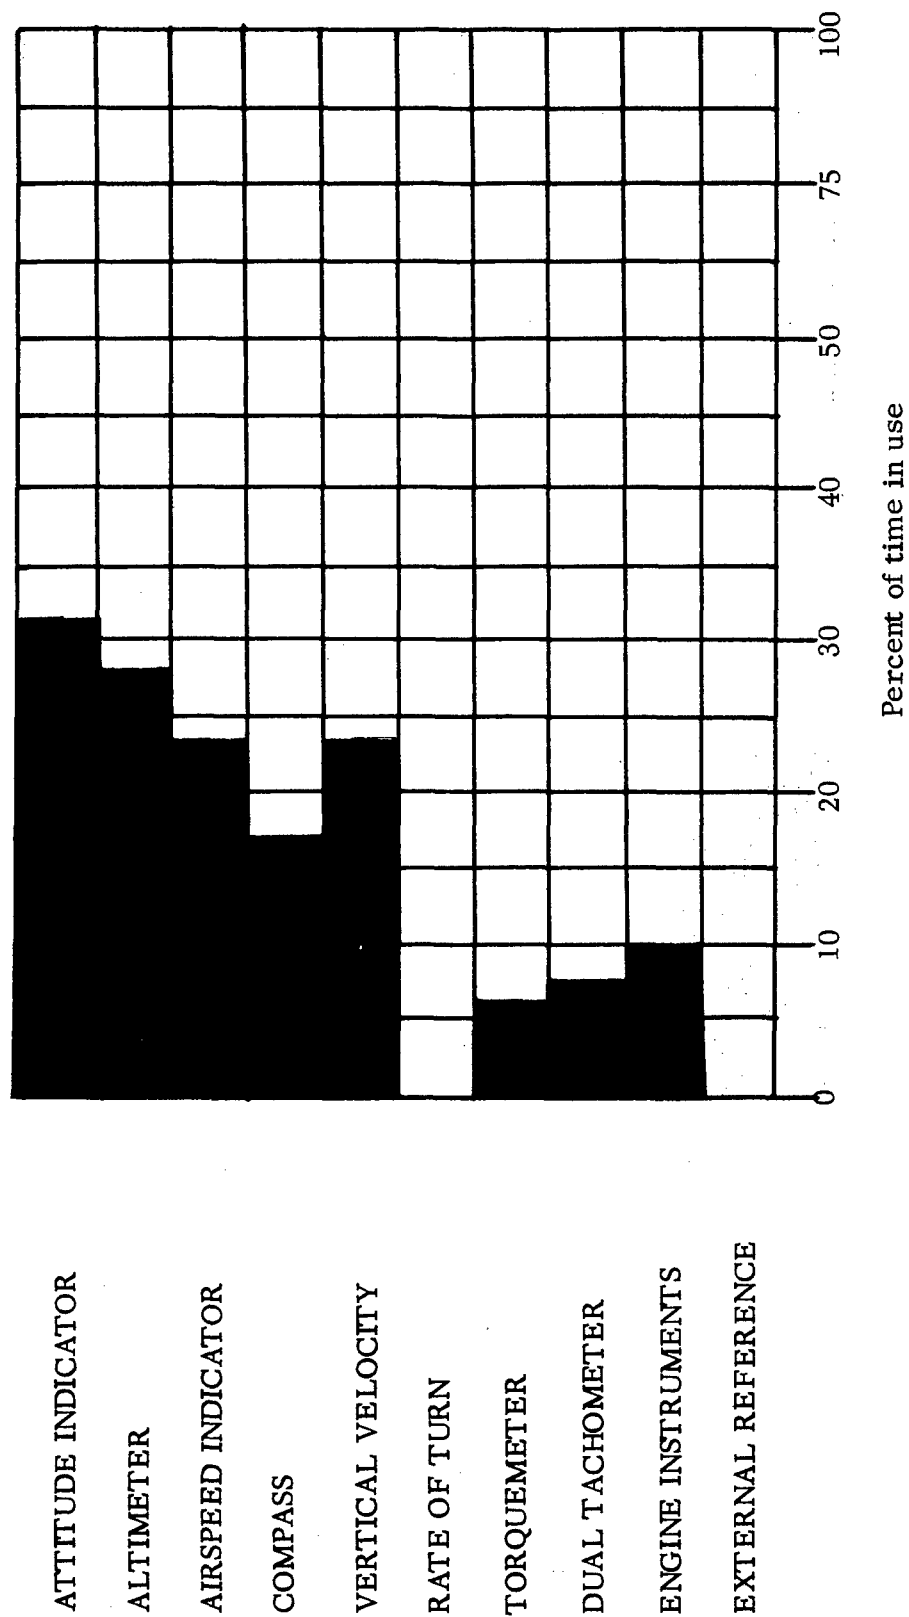


Fig. 12B. INITIAL DESCENT TO 500 FEET (APPROACH), 60K

TIME-BASED USE ANALYSIS

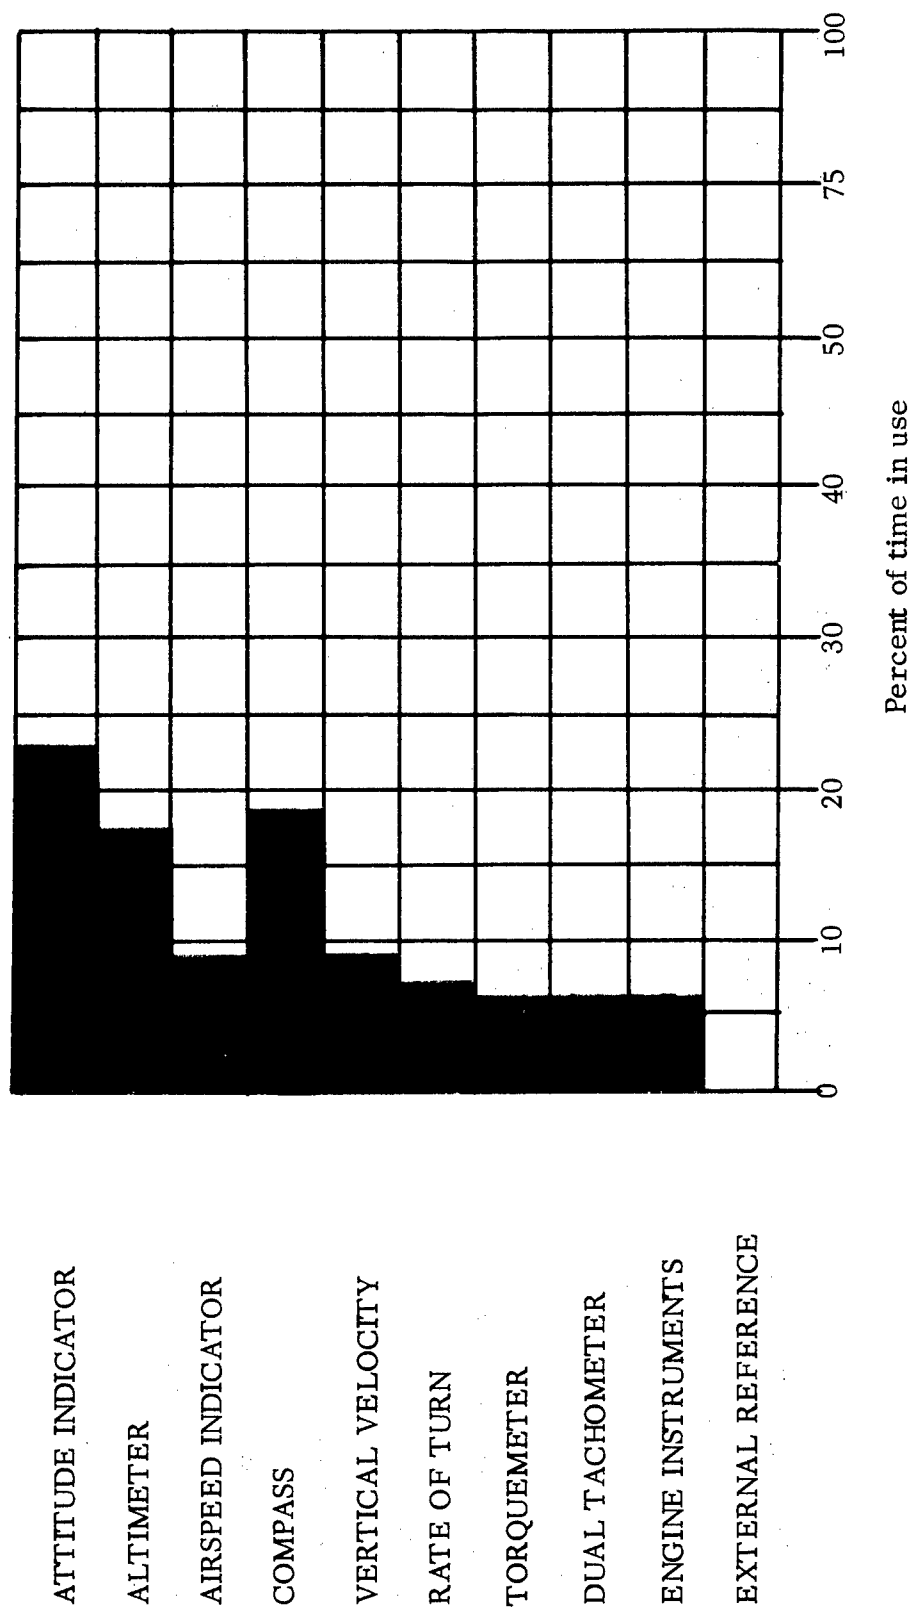


Fig. 13B. REVERSE DIRECTION OF FLIGHT, 60K

TIME-BASED USE ANALYSIS

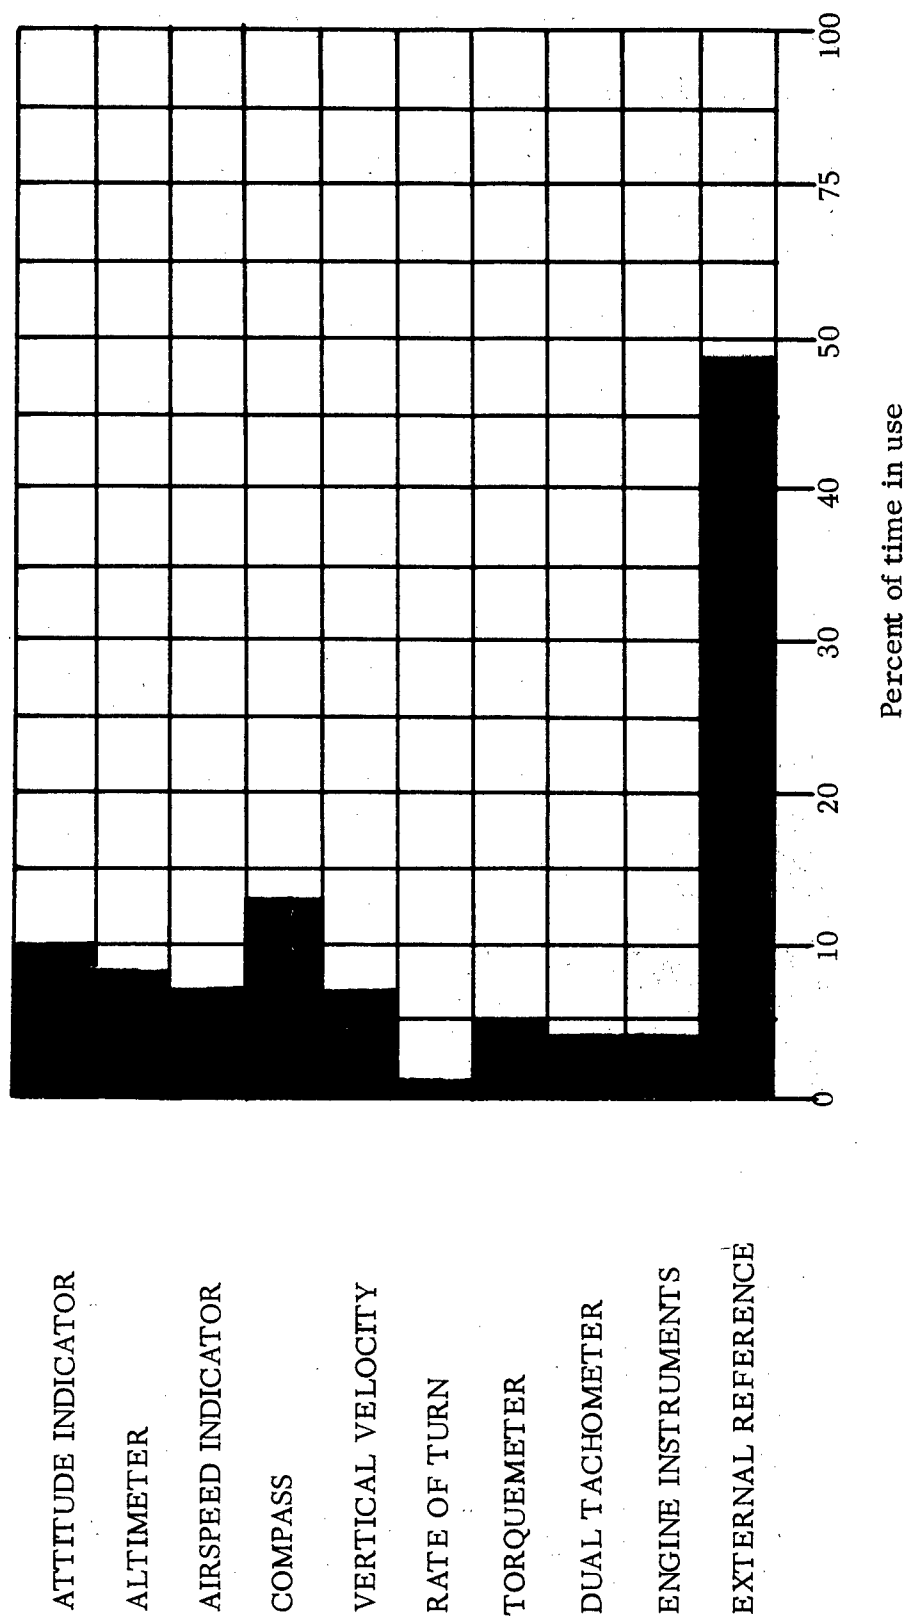


Fig. 14B. CRUISE, 100K, VISUAL

TIME-BASED USE ANALYSIS

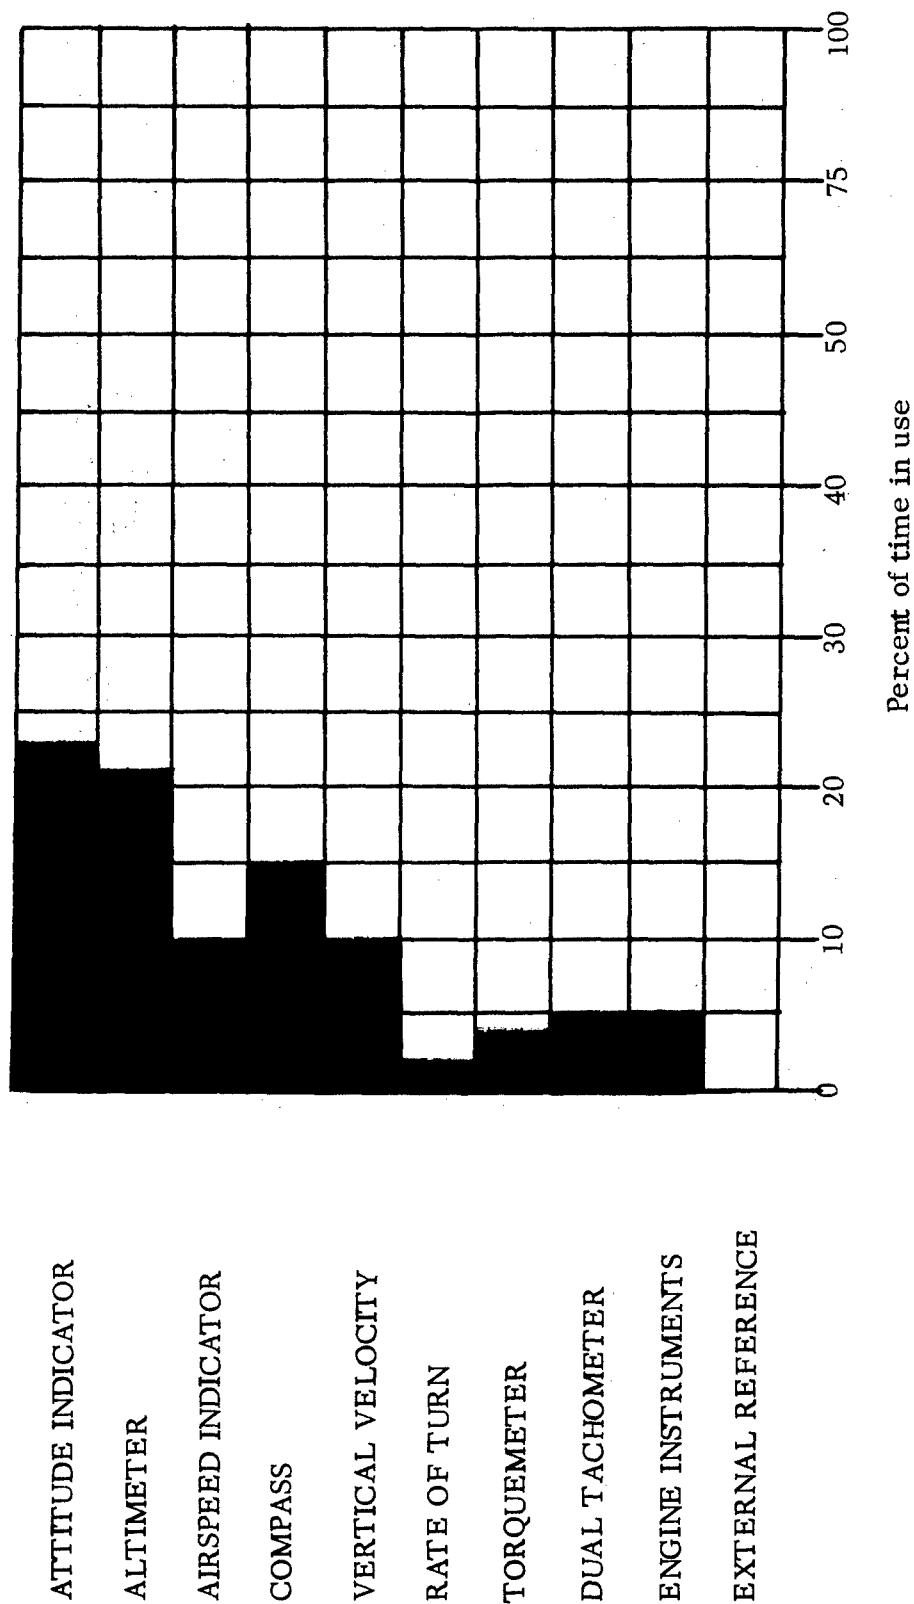


Fig. 15B. CRUISE, 100K, INSTRUMENTS

TIME-BASED USE ANALYSIS

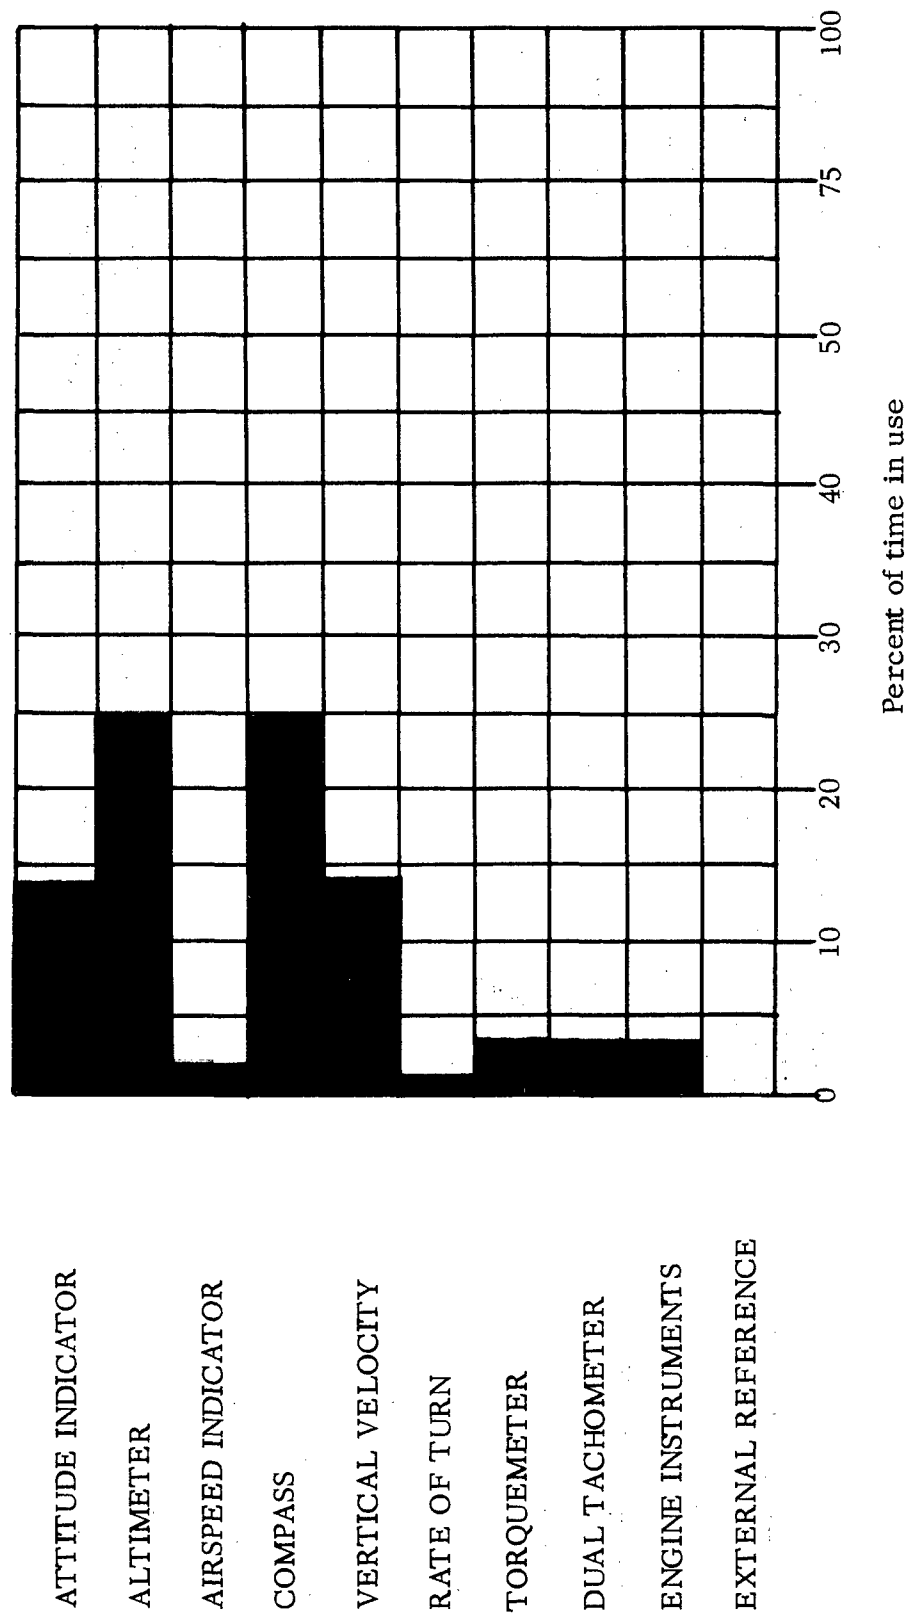


Fig. 16B. STANDARD RATE TURN, 100K

TIME-BASED USE ANALYSIS

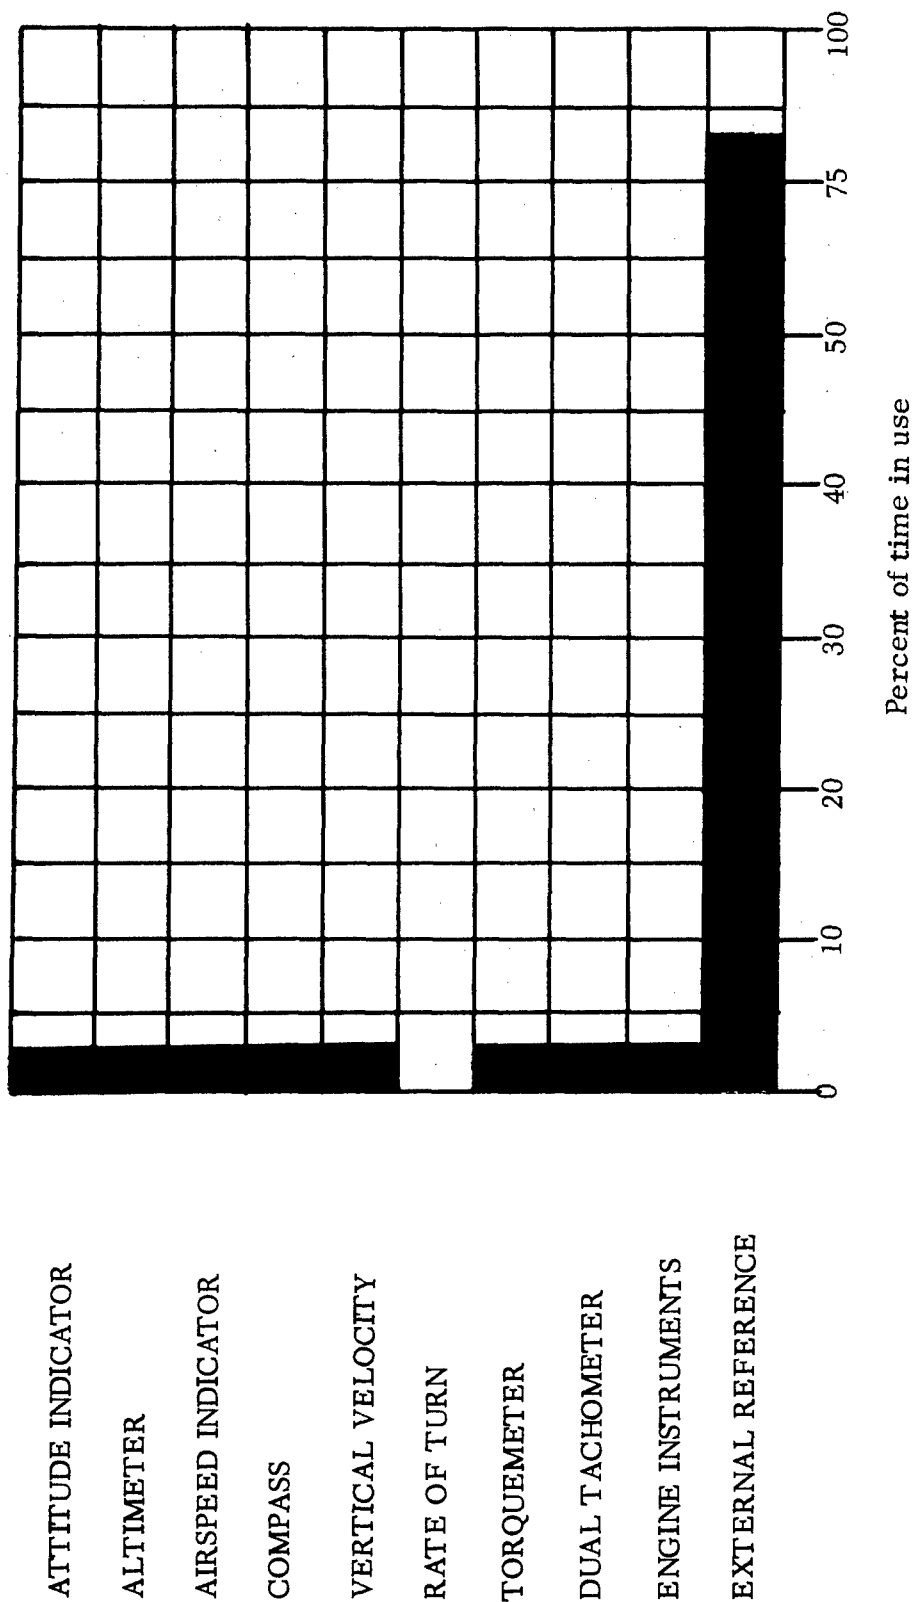


Fig. 17B. TERRAIN FOLLOWING, 100K

TIME-BASED USE ANALYSIS

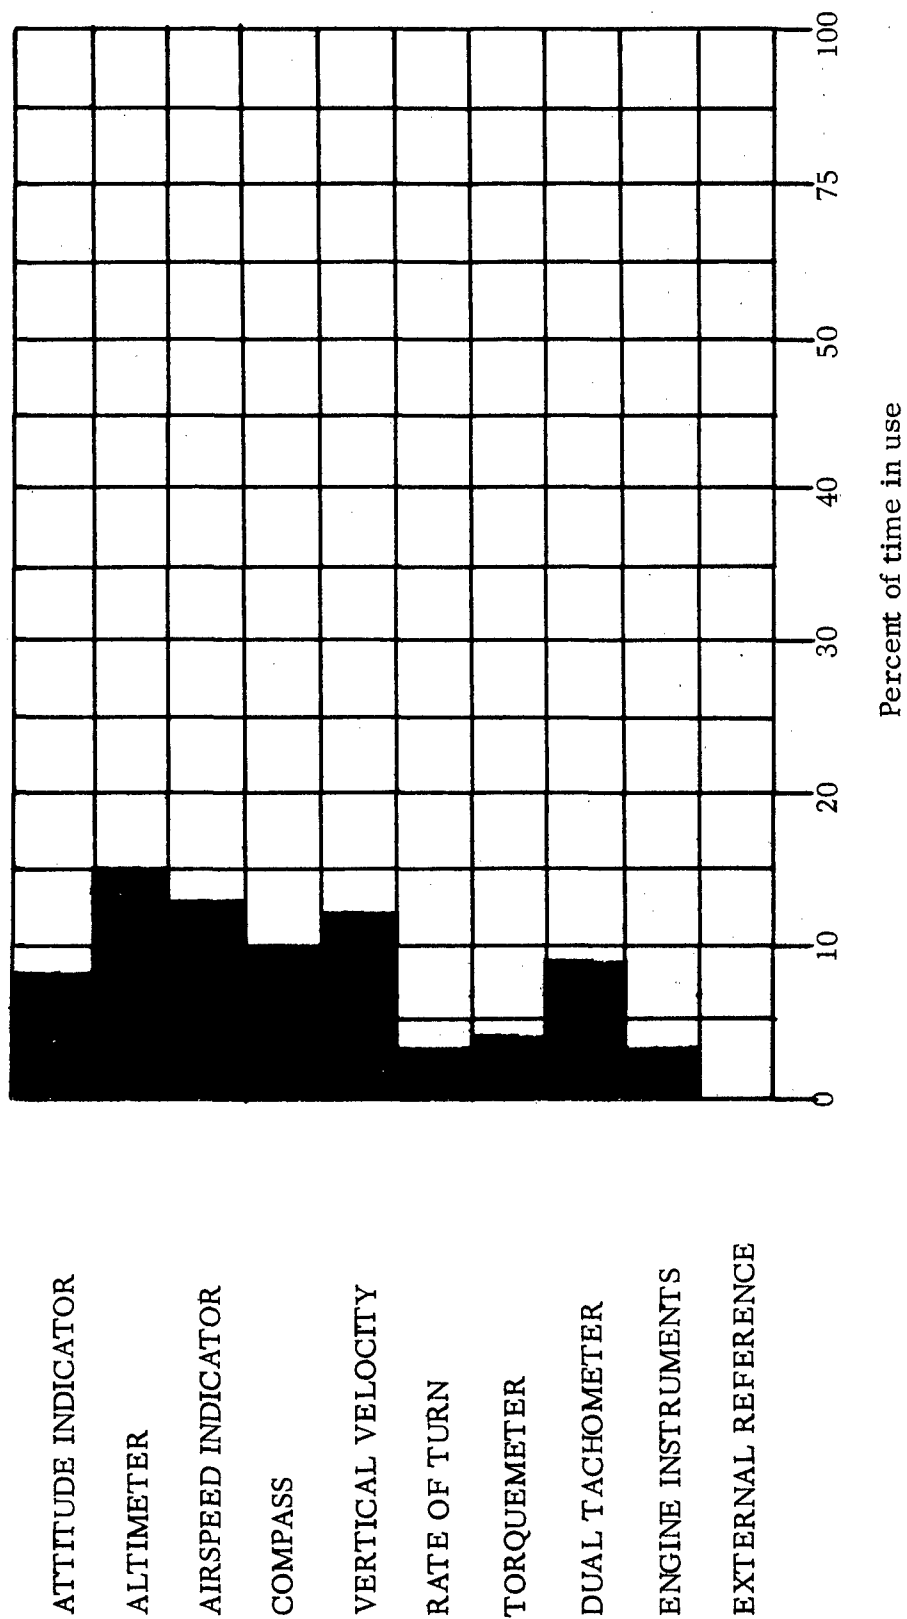


Fig. 18B. CLIMB, 100K, 500 FPM

TIME-BASED USE ANALYSIS

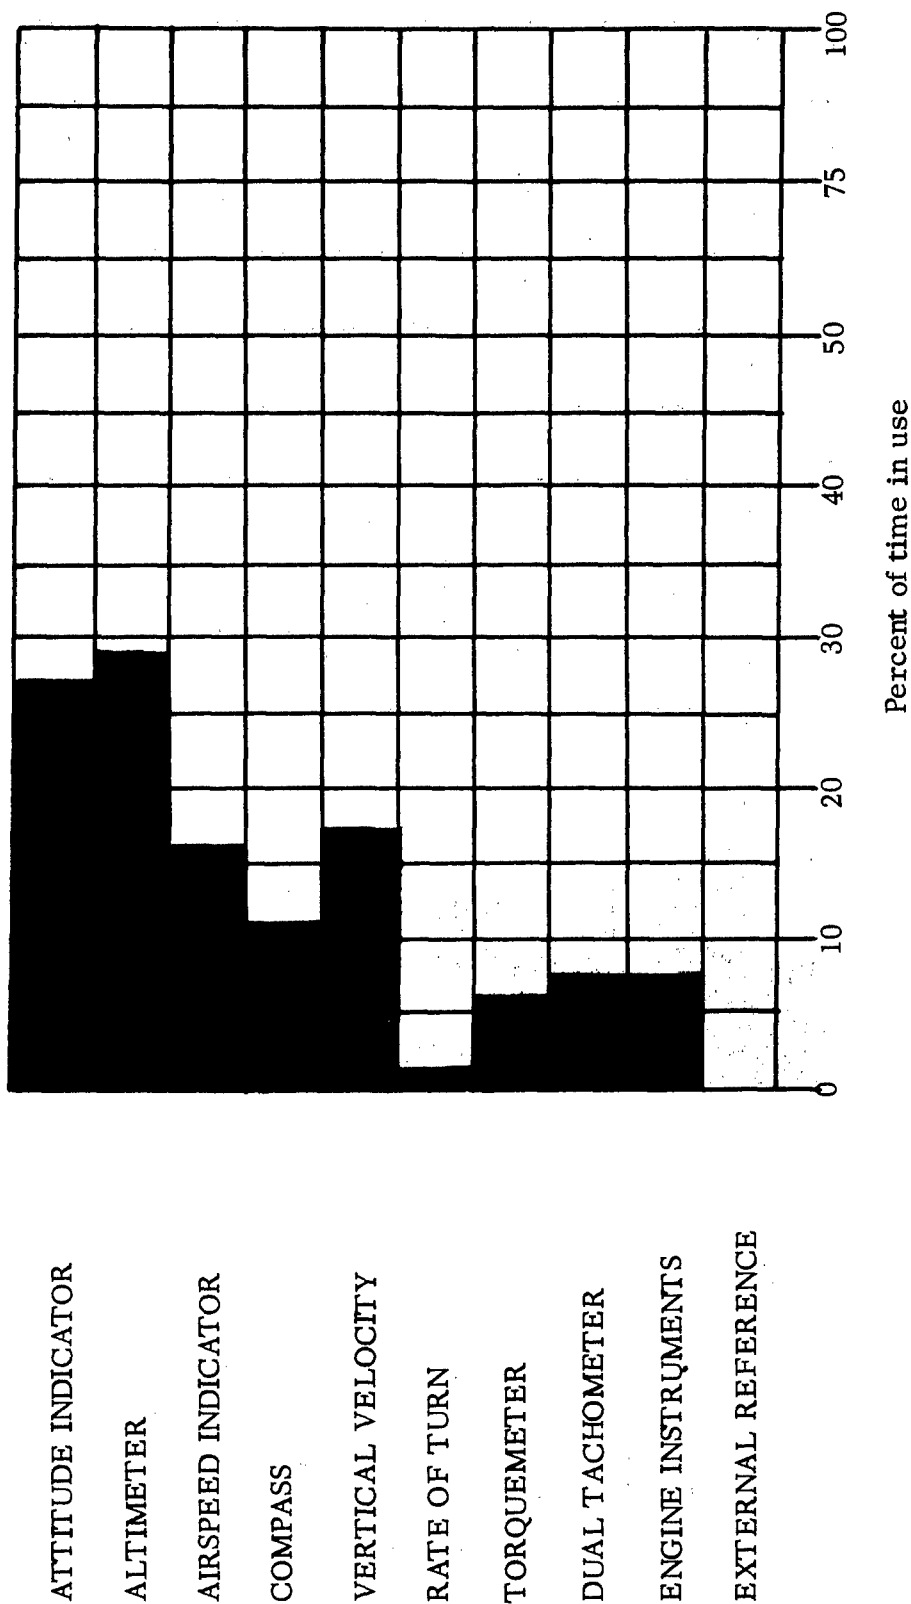


Fig. 19B. DESCENT, 100K, 500 FPM

TIME-BASED USE ANALYSIS

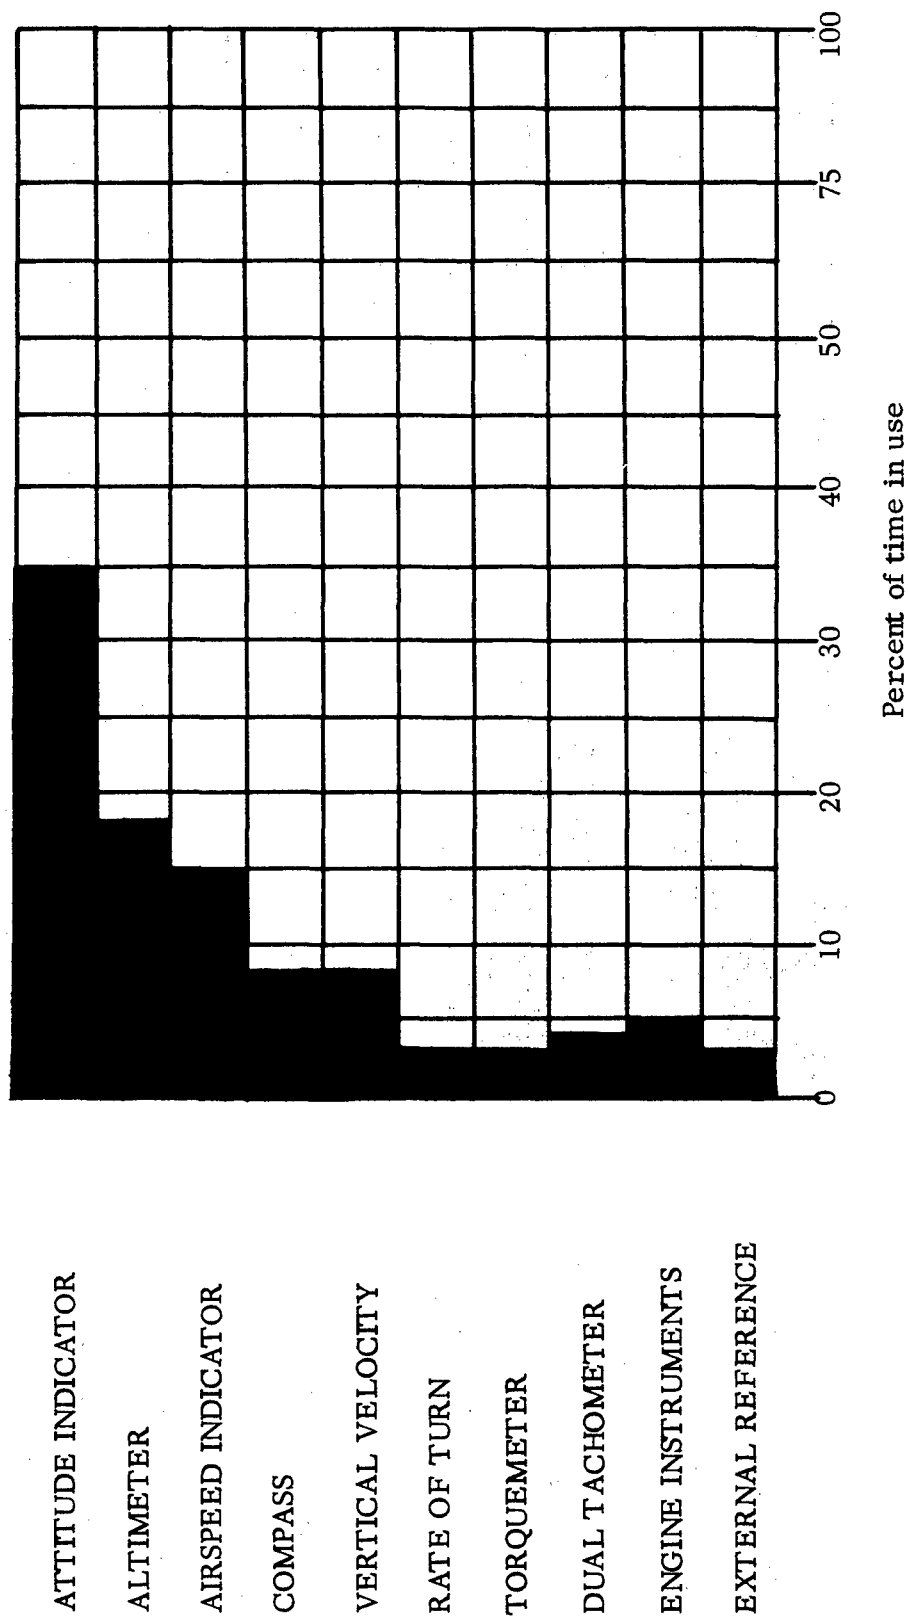


Fig. 20B. 180° DESCENDING TURN, 100K

TIME-BASED USE ANALYSIS

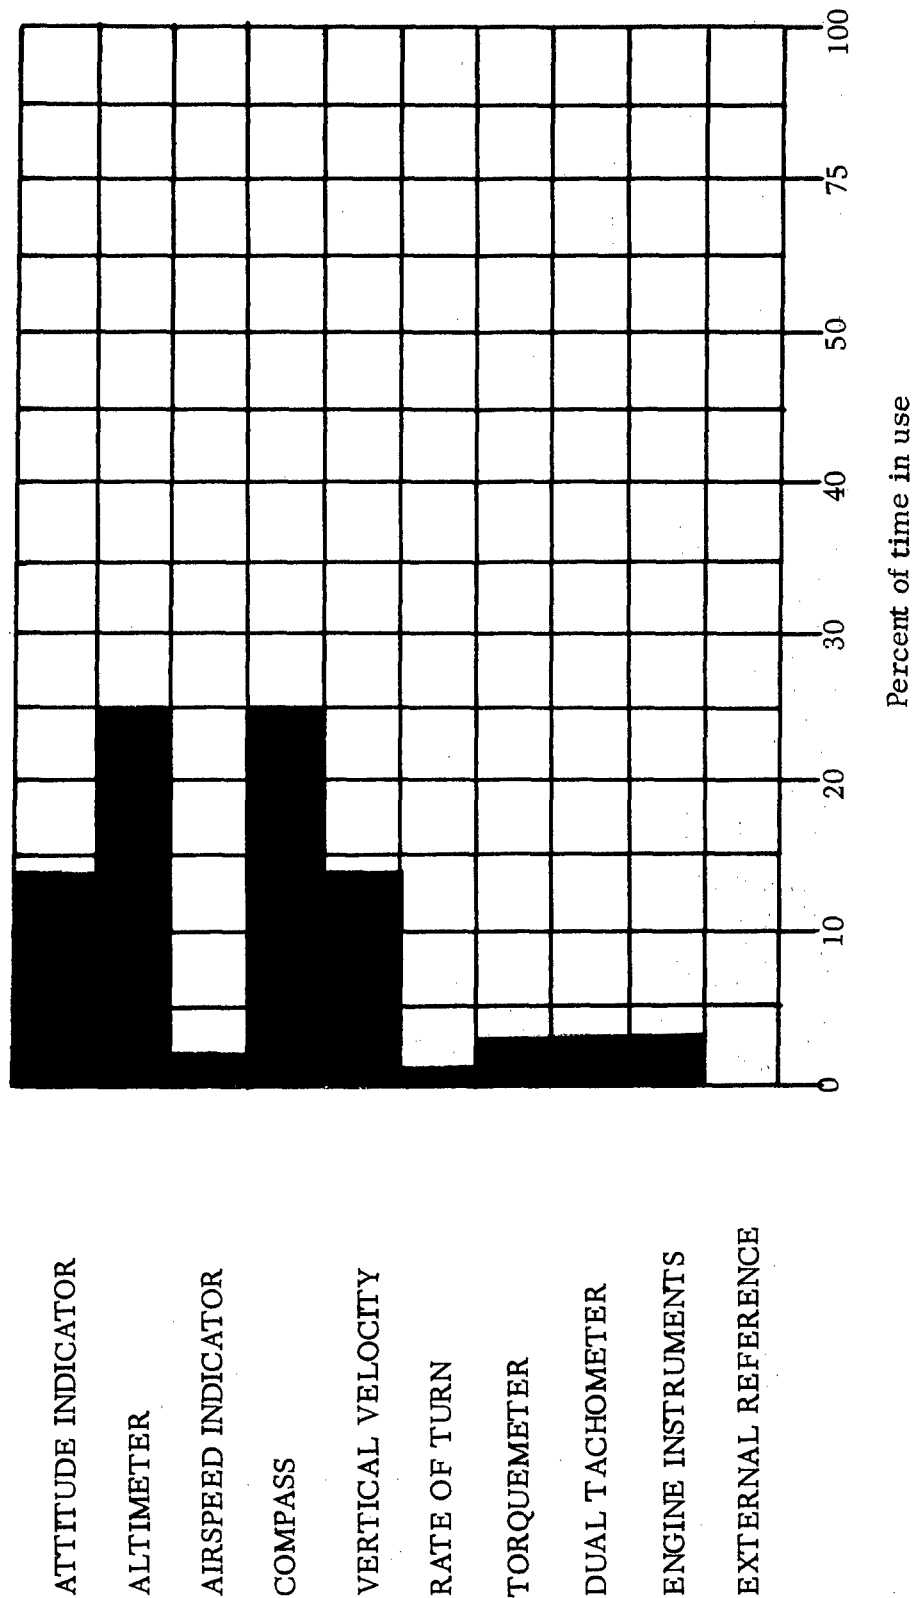


Fig. 21B. REVERSE DIRECTION OF FLIGHT, 100K

APPENDIX C

USE OF THE EMC-2 EYE-MOVEMENT CAMERA

The techniques presented in this section were developed by the author and Mr. Mark J. Monahan. The EMC-2 camera used in this experiment was on loan from U. S. Air Force, AMRL, MRHR, Wright-Patterson Air Force Base, Ohio. This instrument was furnished with a medium and a large APH-6A Air Force flight helmet adapted for the camera system rather than the Guardian motorcycle helmet recommended by the manufacturer (The Westgate Laboratory, Inc., 506 S. High St., Yellow Springs, Ohio). Figure 1C shows the system as used in the initial stages of this study.

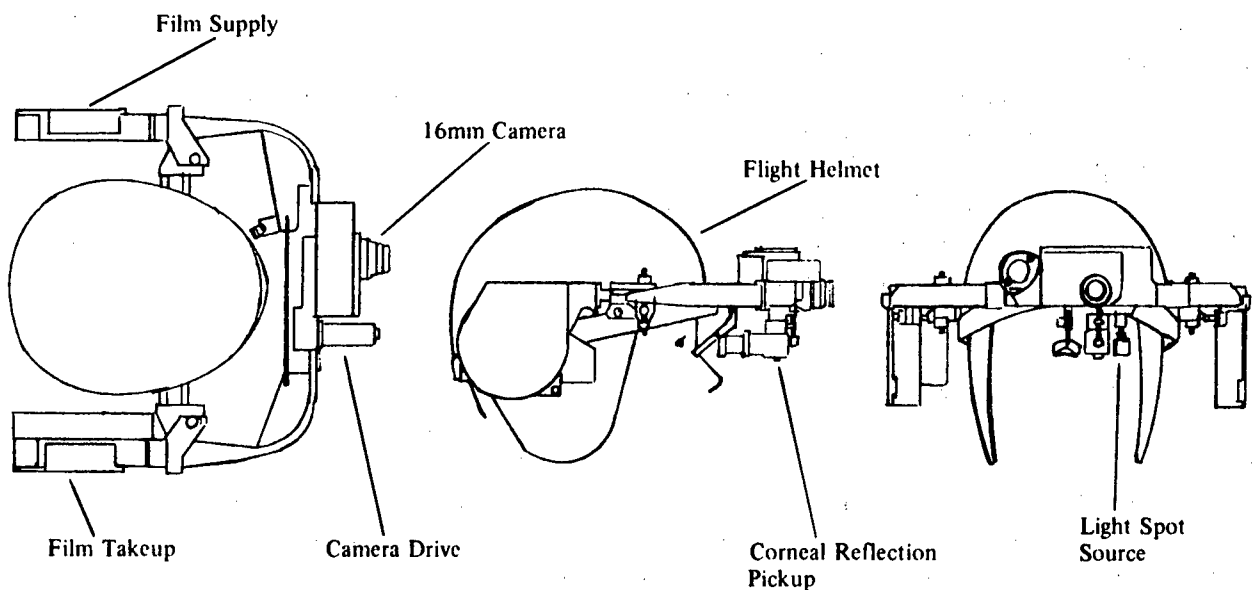


Fig. 1C. EYE MOVEMENT CAMERA SYSTEM

The following description of the system was provided by the manufacturer:

WESTGATE EYE MOVEMENT CAMERA

The model EMC-2 Camera is a light-weight, completely self-contained, head mounted, 16mm motion picture data recording system for research, training and diagnostic study of eye fixation and scanning characteristics.

As the wearer observes a scene, the camera accurately records the points of instantaneous eye fixation. Analysis of the projected film makes it possible to correlate eye movements with various stimuli, and with concurrent measurements of other responses.

In industry and military applications the camera serves as a tool for vigilance studies, training programs, human engineering and product development. Human reactions to real traffic problems, textual materials, packaging, advertising, and color patterns can be accurately recorded and analyzed. In medicine the camera can be a tool for diagnostic study of brain damage and the effects of drugs. It also provides a means for recording reading and scene scanning defects in individuals. Complete portability of the Eye Movement Camera permits its use in both field and laboratory -- practically any place where it is necessary to study eye movement characteristics. This unique system is currently in use by the armed forces, space research laboratories, and leading research organizations.

Principle of Operation

The camera is fixed to a helmet worn on the subject's head. As the camera photographs the subject's field of view, or primary image, a secondary image is superimposed on the film in the form of a small white dot. In each frame the dot indicates the exact point of eye fixation at the instant of exposure. The secondary image is created by the corneal reflection of a pinpoint light trained on the subject's left eye. The reflected spot is imaged on the back of the film and superimposed on the primary image. At the film plane, the reflected spot can be as small as 0.13" in diameter. Larger spot sizes can be achieved by changing the aperture mask.

The shape of the cornea causes the position of the reflected light to change with eye movement, accurately indicating the point of instantaneous eye fixation.

Camera System

The electrically operated camera system is in the form of a horseshoe, with film supply and take-up spools located on either side of the head. The spools hold up to 125 feet of film. Speed is adjustable to 4, 8, or 16 frames per second.

Speeds to 100 frames per second can be provided. Recording time is 21 minutes at 4 frames per second.

The system is easily controlled by the subject or investigator with a hand-held control box, containing switches to regulate power, camera speeds, and light source intensity. Power is supplied either by a battery strapped to the subject's waist or by an external source.

For convenience in conducting experiments, a switch closure with each frame is provided to synchronize the camera data with voice recordings, oscillographs, and other forms of recorded information.

It is possible to determine which instrument is being viewed in an aircraft cockpit, or which sign or vehicle is the point of attention in a driver study. Special lenses provide even greater detail showing the instrument portion, or particular letter being viewed in a line of text.

Data can be reduced rapidly with a 16mm projector of editing viewer.

Calibration and Adjustment

The camera and helmet can be adjusted laterally, longitudinally, and rotationally to fit each subject's anthropometric requirements. The nose steady-rest is also adjustable. If the camera and helmet must be removed and replaced often during an experiment, or if excessive head motion may be encountered, the optional bite bare is necessary in order to maintain calibration.

A Calibration Viewer, VC-1, attaches to the camera in place of the primary scene lens to permit adjustment and calibration of image alignments for the entire field of view.

An Alignment Check Viewer provides a means of retaining the subject's basic adjustments if the helmet must be removed. When the helmet is replaced, the subject may rapidly reproduce the previous position.

When telephoto lenses are used for greater detail and accuracy, the adjustable bite bar is recommended.

Calibration Stand

The Calibration Stand, an optional accessory, provides a practical and safe means for supporting the camera and helmet for film loading and unloading, initial calibration, training, storage or test purposes.

SPECIFICATIONS

Camera

Custom designed, electrically driven, 16mm motion picture camera. Frame rates adjustable to 4, 8, and 16 frames per second. Rates to 100 frames per second are available on special order. Camera without helmet and film weighs 3.9 pounds.

Film

Capacity of 100 feet standard 16mm film, or 125 feet of Dupont Kronar base film. Maximum recording time 21 minutes at 4 frames per second.

Lens

Five element f/2.2 lens with 10mm focal length. Capable of resolving scene elements separated by less than 1° of arc. Field of view 20° from nominal line of sight. Other lenses, including wide angle, may be used.

Helmet

Camera is normally mounted on a Guardian motorcycle safety helmet. Basic camera is readily adaptable to other commercial and military helmets.

Electrical

Input power 28 volts DC supplied to control box from external source or battery strapped to subject's waist. Current drain is 1.24 amperes.

HEL CALIBRATION PROCEDURES

The accurate calibration of the system is essential for obtaining successful results. For the study a camera-to-panel distance of 24 inches was used. This was representative of the eye-to-panel distances encountered in the aircraft used.

A calibration chart was constructed which consisted of cross-hairs and two square rings: the inner ring was 3.2 inches on a side and the outer ring was six inches on a side. These measurements were determined by calculations using the optical specifications of the camera tempered by a dash of cut-and-fit technique.

This size chart used for calibration effectively covers the maximum recordable scan area of the system. To produce the calibration strips of film which must be in the film gate of the camera for initial calibration, a target was constructed in the same design as the calibration chart with the following dimensions: cross-hair lines were 1/4 inch Black ChartPak, the inner ring was 8.625 inches on a side and made of 1/2 inch Black ChartPak, and the outer ring was 15.75 inches on a side and made of 1/2 inch Black ChartPak. The target background was white poster board and was placed 24 inches from the rear element in the lens system of the camera.

The first step in calibrating this system is to make sure the boresight light from the camera is actually indicating the center of the target. This was done by placing the camera in the calibration stand and centering the boresight light on the center of the target. Several feet of film was then exposed and the picture of the target was checked against the center of the picture frame. Slight adjustments can be made in the boresight light by the use of shims at the mounting points.

Calibrating the system for use required a snug but comfortable fit of the helmet and adjustment of the camera helmet mounts so that there was sufficient movement of the periscope in the vertical direction to accommodate the subject's eye.

Prior to an actual run with the system a calibration leader strip was attached to the film and loaded into the camera. This film was advanced through the camera until all drive sprockets contained film. The lens was then removed and a frame of the calibration strip was stopped and centered in the film gate with the shutter in the open position. The system was then put on the subject. When the helmet was properly donned and the helmet chin strap fastened, the bite bar attachment was adjusted to the subject and the light source was adjusted to project a dot of light on the subject's cornea.

The experimenter now installed the VC-1 Calibration Viewer in the camera in place of the lens so that he might adjust the periscope to provide the proper size light spot reflected from the eye onto the calibration strip of film in the film gate. The instructions furnished with the system cover this step in detail. The subject was then instructed to look at the calibration chart, which was approximately 24 inches in front of him, and to aim his head so that the boresight light coincided with the intersection of the cross-hairs. He was then instructed to fixate on this point while the experimenter checked through the VC-1 to see if the reflected light from the cornea was also in the center of the calibration strip of film; if it was not, the periscope was adjusted to place it there. When this adjustment was accomplished the subject was instructed to look at the lower left corner of the inner sighting ring; if the calibration was correct the dot of light on the calibration strip of film moved to the upper right corner of the inner ring. This step was repeated for all four corners of both of the sighting rings and adjustments made if necessary. When this procedure was completed, the VC-1 was removed and the lens was installed in the camera. The initial calibration of a subject, after the helmet had been fitted, took

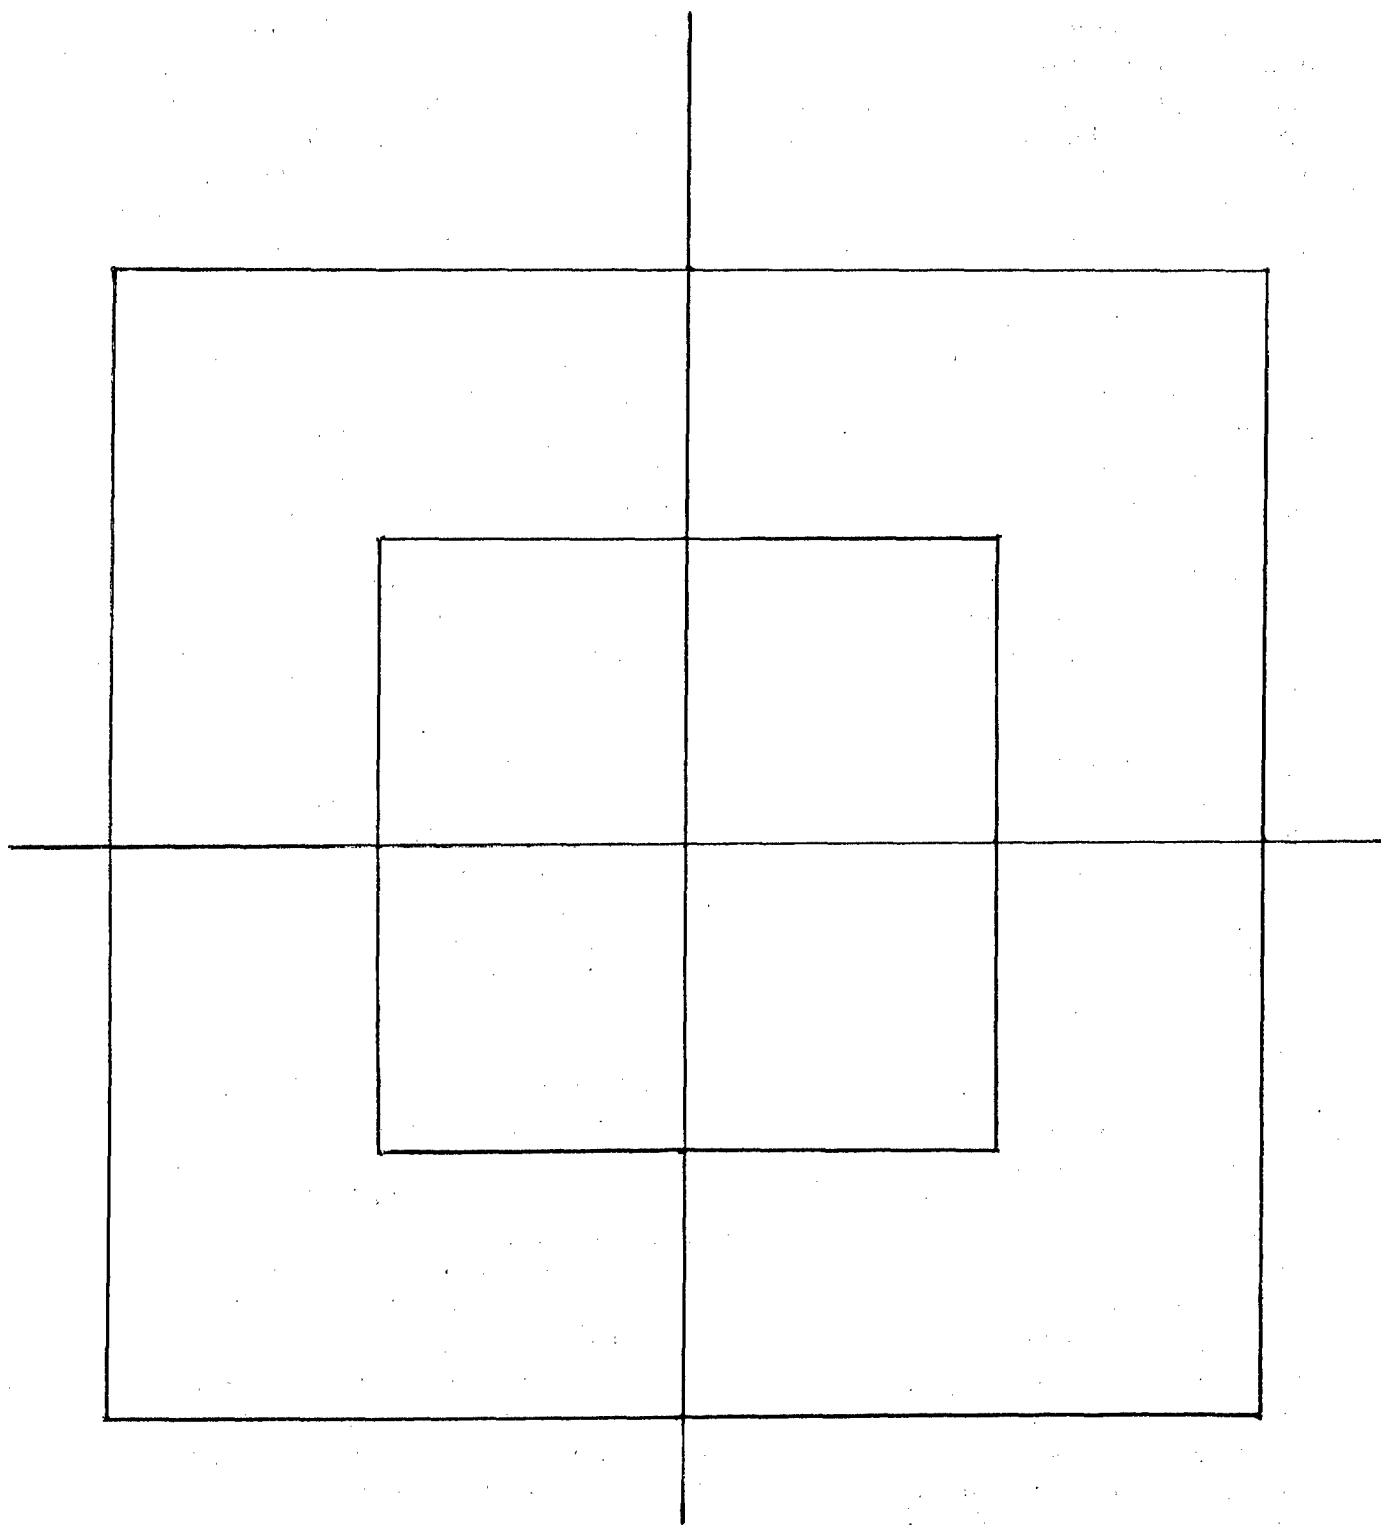


Fig. 2C. EMC-2 CALIBRATION CHART



Fig. 3C. EYE FIXATION POINT DURING CALIBRATION

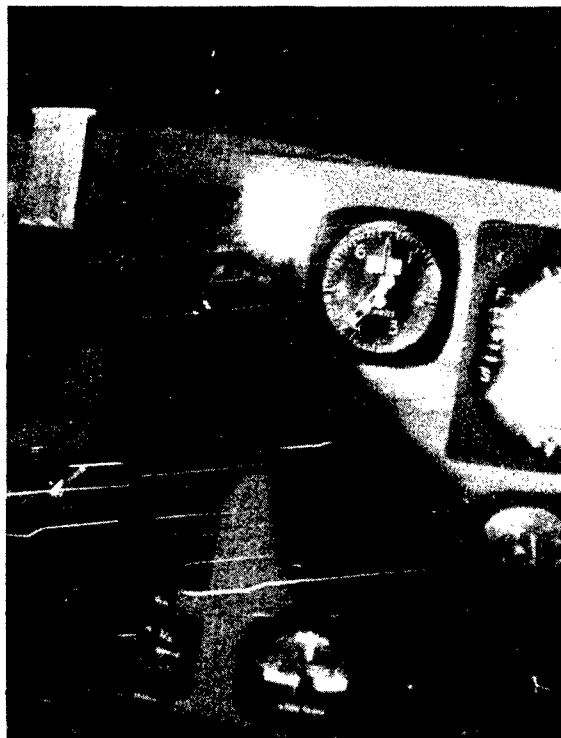


Fig. 4C. EYE FIXATION POINT ON SIMULATOR TORQUEMETER
AFTER CALIBRATION

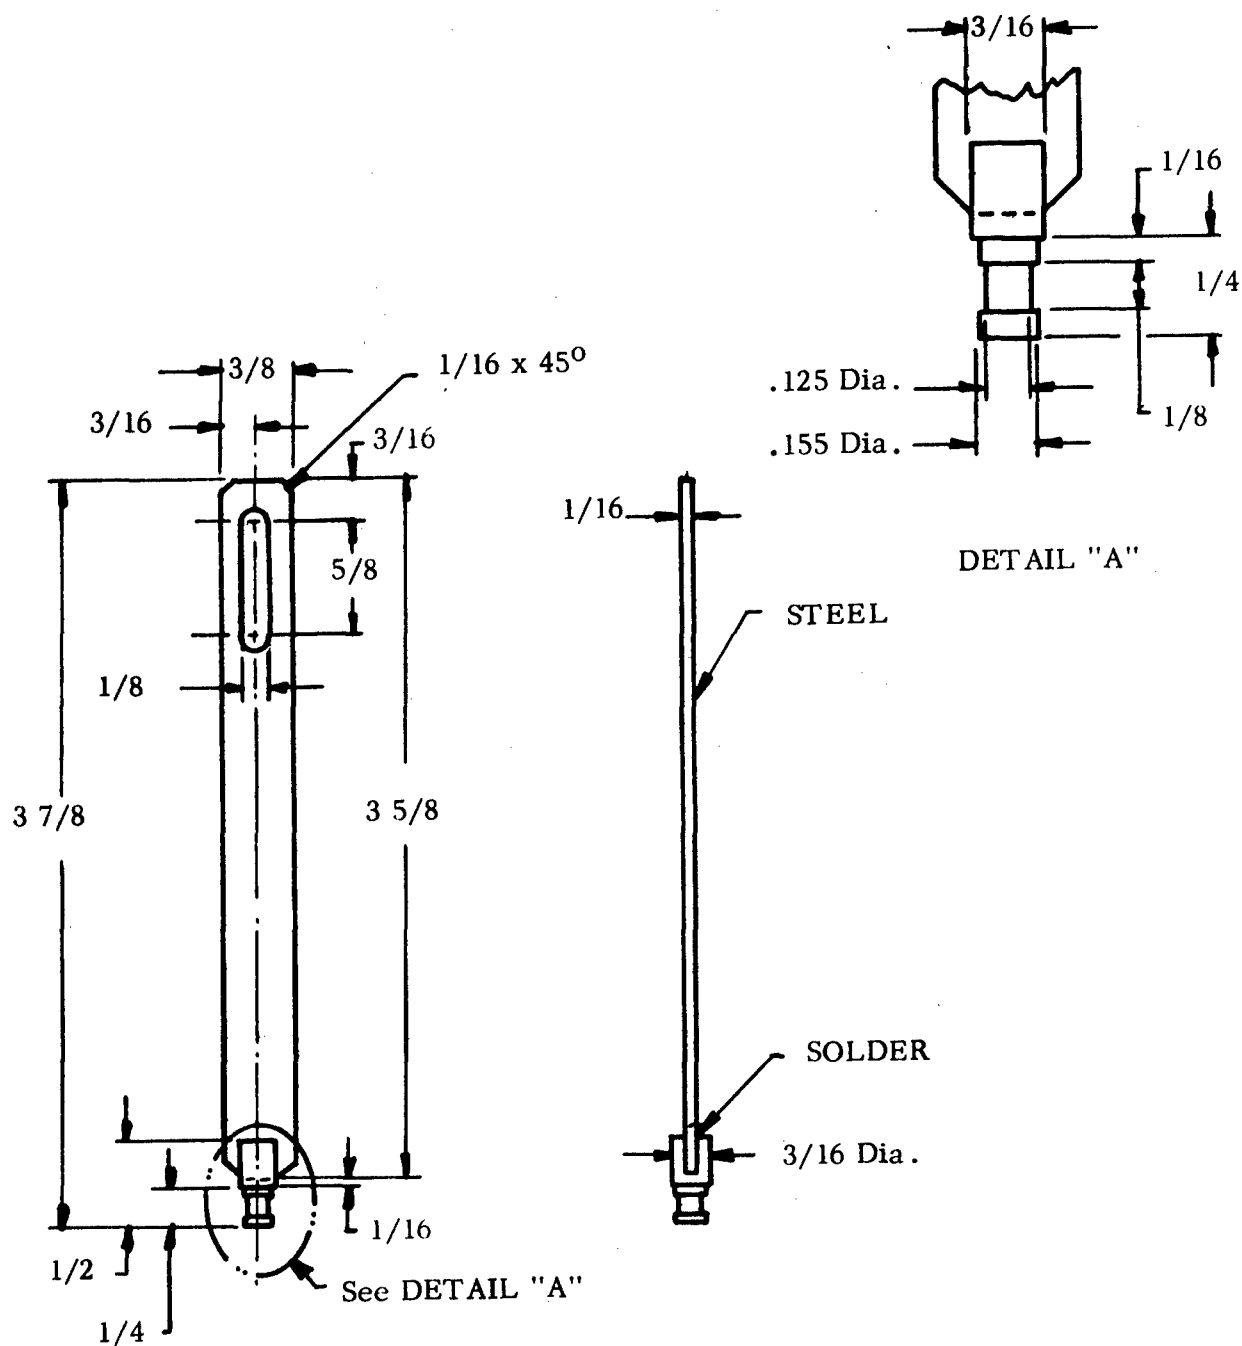


Fig. 5C. PLAN AND ELEVATION VIEW OF BITE BAR BRACKET

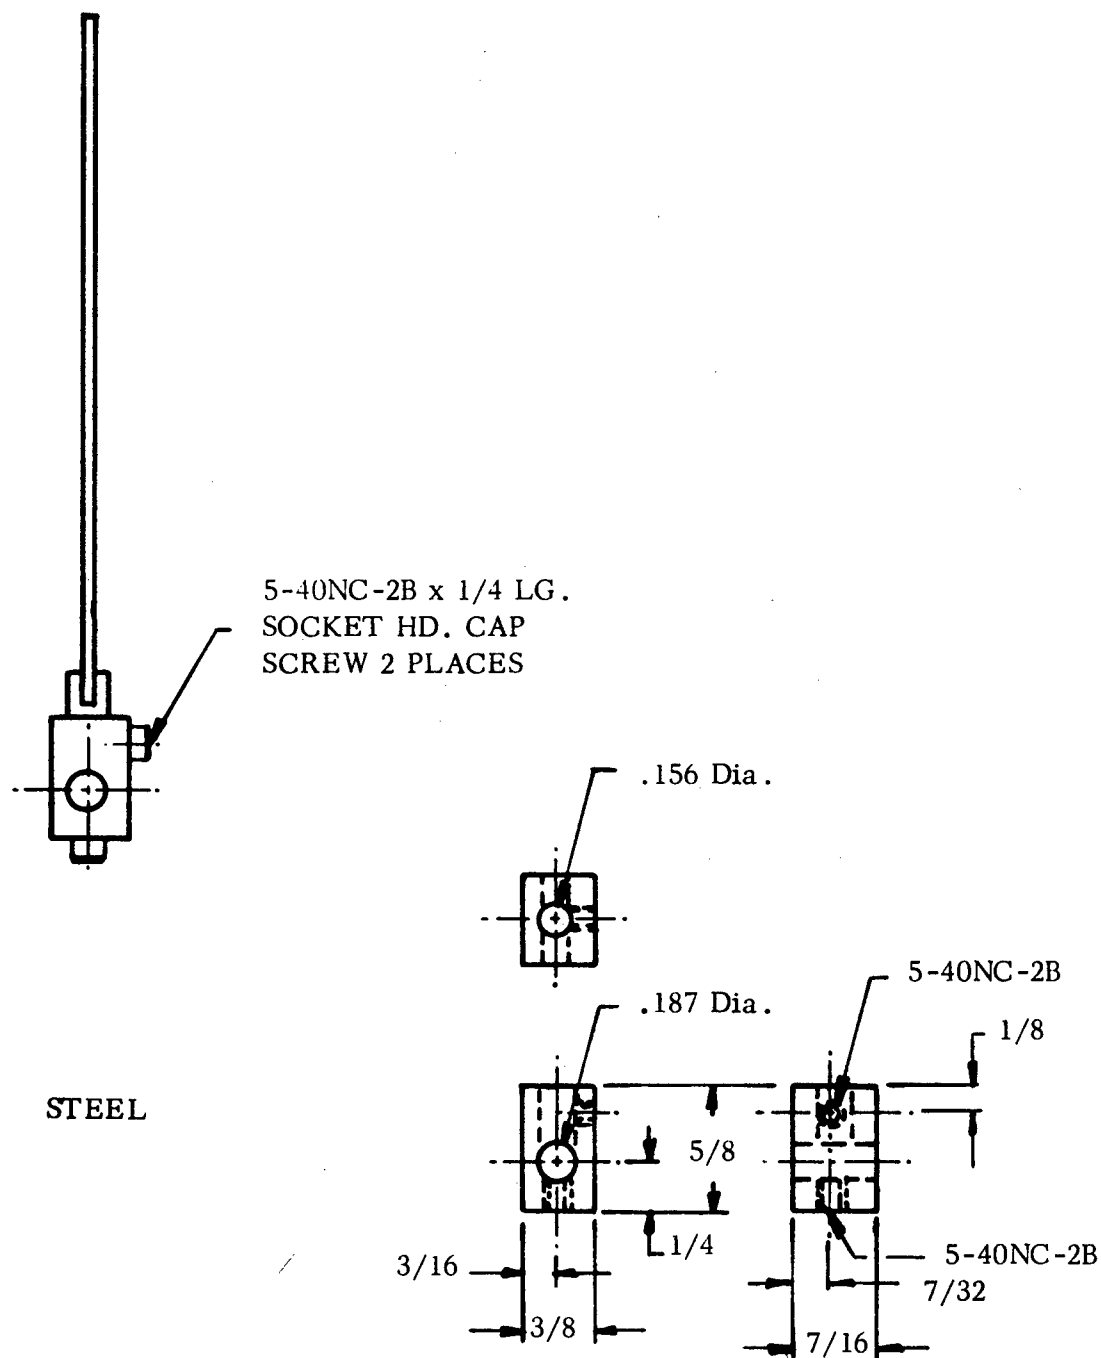


Fig. 6C. BITE BAR BRACKET WITH BLADE HOLDER ATTACHED AND
 PLAN AND ELEVATION VIEWS OF BITE BAR BLADE HOLDER

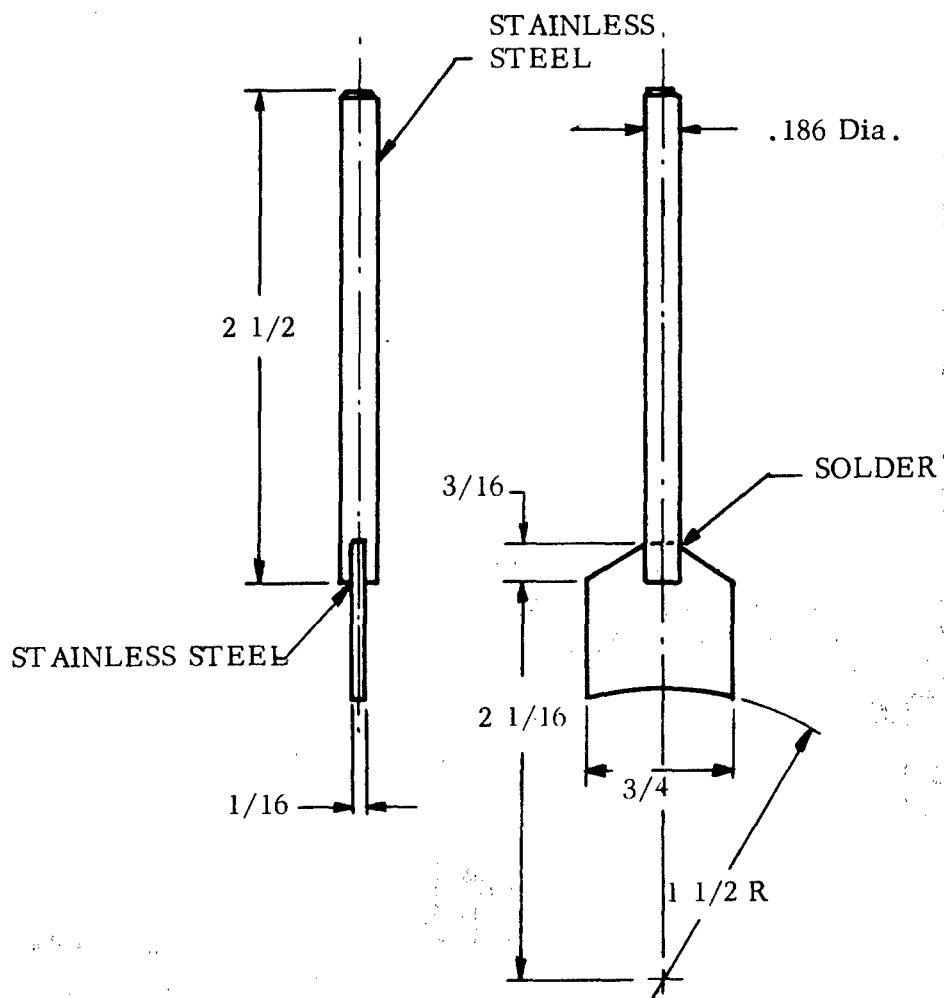


Fig. 7C. PLAN AND ELEVATION VIEW OF BITE BAR BLADE

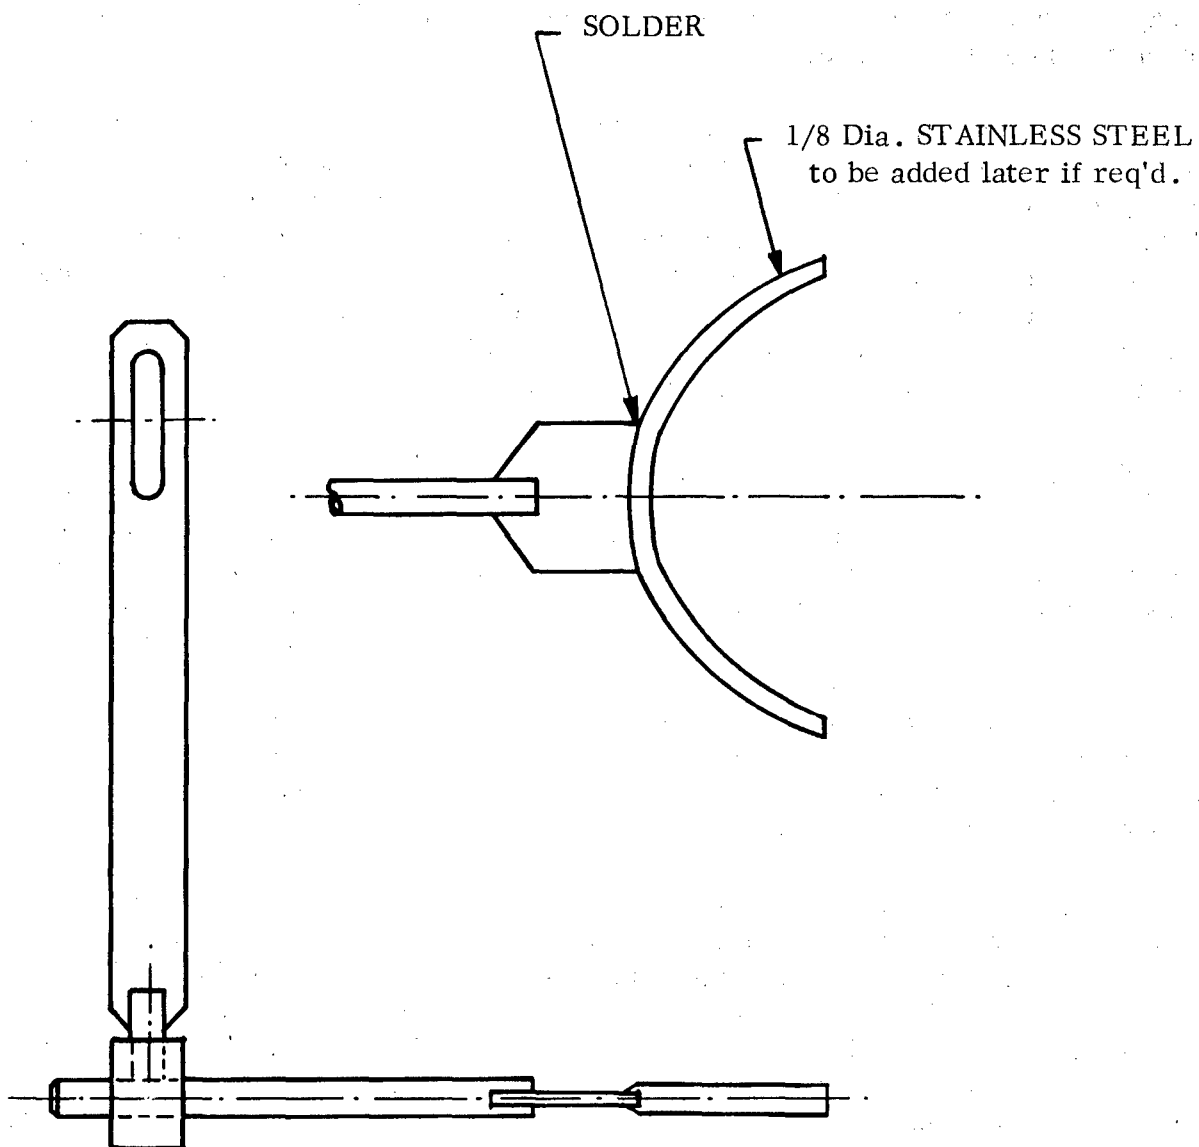


Fig. 8C. BITE BAR ASSEMBLY, ELEVATION VIEW WITH DETAIL
VIEW OF OPTIONAL REINFORCED BITE BAR BLADE
(Assembly is attached to nose-rest mounting bracket.)

an experienced operator 15-20 minutes; subsequent calibrations on the same subject took approximately 5 minutes.

Early in the study it was determined that the nose steady-rest was not usable for an experiment of this type. The Design Engineering Branch of the Human Engineering Laboratories developed a lightweight bite bar attachment (Figs. 5C-8C) which used the nose steady-rest mounting points and offered no visual interference. LTC K. L. Miller, Chief of Prosthetics, U. S. Army Dental Detachment at Aberdeen Proving Ground, Maryland, provided fitted acrylic bite bars for this attachment. These bite bars were fitted to the subject's upper and lower front teeth from canine to canine and were bonded to the metal portion of the bite bars.

It was felt that the successful use by the study of the EMC-2 system in actual helicopter flight depended on these bite bars. They allowed for quick and accurate calibration; once calibrated it was possible for the subject to make gross and rapid head movements without changing calibration; it was also possible for the subject to open his mouth without disturbing the calibration, and, of special importance, subject discomfort was minimized. There were no complaints from the subjects during or after any of the six flights; the subjects kept the helmets on and bite bars in place in all cases until the aircraft had landed and was shut down even though they had been instructed that they could remove the bite bar as soon as the safety pilot took control of the aircraft. The subjects averaged slightly more than one-half hour of system wearing time for each 20 minute flight.

Problems encountered and documented by other users of this system were known to the author prior to its use, but it was felt that the EMC-2 system was the most appropriate one available for this study because it offered simplicity of data reduction. The HEL-designed bite bars allowed us to secure data where others had encountered unsurmountable difficulties. A minor modification of the film transport system eliminated the film breakage experienced by others. An improved technique for cutting the leading edge of the film was developed to shorten the loading time from more than 30 minutes to two minutes.

One problem the study did not overcome concerned the aperture settings necessary to secure readable film. If the aperture (f) setting was proper for the ambient light and shutter speed used, the exposed film would not show the dot indicating eye fixation point. To correct for this an aperture of four f settings greater was used; for example, the light and shutter speed called for a setting of f 2.2, with aperture settings of f 2.2, f 3.5, f 5.6, f 8 available, a setting of f 8 was necessary to have both the scene and eye fixation dot visible and usable on the film. The study used Plus X Reversal film which has a rather thick and opaque emulsion through which the eye fixation light must penetrate. There are films available which have an essentially transparent emulsion and should alleviate this problem.



Fig. 9C. PILOT S WEARING EMC-2



Fig. 10C. PILOT H WEARING EMC-2

Another problem considered was the adverse effect of the aircraft's vibration on photography. Previous experimentation by the Human Engineering Laboratories in the OH-6 helicopter used a motion picture photography of the instrument panel during flight for recording instrument readings. The vibration in this case caused little or no difficulty in reading the instruments, but to be prepared for the worst possible conditions a small bracket was designed to damp the vibrations of the eye-movement camera. This bracket, constructed from 20 gauge steel, was 1/4 inch wide by 2 inches long and was secured to the camera frame by the nose steady-rest mounting bolts. It had a rubber pad bonded to the other end which was in contact with the helmet; this friction provided vibration damping. In actual flight it was not necessary to use this device as the vibration damping action of the pilot's neck was sufficient to take care of any motion encountered in the UH-1.

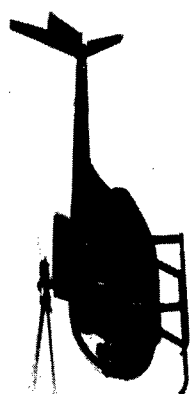


Fig. 11C. OH-6

BIBLIOGRAPHY

1. Abbott, P. E., & Woodbury, J. R. Investigation of auditory displays. Joint Army-Navy Aircraft Instrumentation Research, Office of Naval Research, Washington, D. C., 1965. (AD 613338)
2. Aerospace Industries Association. 1960 Aerospace forecast of technical requirements. Los Angeles, Calif., 1960.
3. Air Research and Development Command. Personnel subsystem management. Andrews Air Force Base, Md.: Headquarters, ARDC, 1960.
4. Anderson, R. O. Design for space-vehicle control system reliability. Wright Air Development Center, Wright-Patterson Air Force Base, Ohio, 1958. (AD 155 612)
5. Anderson, R. O. Methods of analysis for space-vehicle control system redundancy. Wright Air Development Center, Wright-Patterson Air Force Base, Ohio, 1958 (AD 206 670)
6. Army Aviation Board. Optimum instrument presentation and panel arrangement for Army rotary-wing aircraft. Army Aviation Bulletin, May 1959. (AD 218 214)
7. Arnold, W. O., et al. Study of a new system for air traffic control embodying the cursor-coordinated display. New York: Bell Telephone Laboratories, November 1954. (AD 69 017)
8. Baker, C. A., & Grether, W. F. Visual presentation of information. Wright Air Development Center, Wright-Patterson Air Force Base, Ohio, August 1954. (AD 43 064)
9. Baxter, J. R. Projected symbolic displays for general aircraft. Aeronautical Research Laboratories, Melbourne, Australia, March 1963. (AD 42 683)
10. Baxter, J. R., & Workman, J. D. Review of projected displays of flight information and recommendations for further development. Human Engineering Report 2, Aeronautical Research Laboratories, Melbourne, Australia, August 1962. (AD 608 843)
11. Behan, R. A., & Siciliani, F. A. The landing task and pilot acceptance of displays for landing in reduced weather minimums. AIAA Paper 65-722, Serendipity Associates, Shatsworth, Calif., November 1965.

12. Behan, R. A., Smith, E. E., & Price, H. E. Pilot acceptance factors related to instrumentation requirements and display concepts for all-weather banding. NASA CR-189, Serendipity Associates, Sherman Oaks, Calif., March 1965.
13. Bell Helicopter Corporation. Human factors quarterly progress report. Fort Worth, Tex., September 1959 (Contract Nonr 1670(00)).
14. Bell Helicopter Corporation. Human factors quarterly progress report. Fort Worth, Tex., April 1 - June 30, 1960 (Contract Nonr 1670(00)).
15. Bell Helicopter Corporation. Human factors quarterly progress report. Fort Worth, Tex., March 1960 (Contract Nonr 1670(00)).
16. Bell Helicopter Corporation. Human factors quarterly progress report. Fort Worth, Tex., December 1959 (Contract Nonr 1670(00)).
17. Berger, C., & Foust, C. L. Subic environment control information requirements study. Cambridge, Mass.: Ionics, Inc., September 1959. (Confidential)
18. Biotechnology Laboratory, University of California Department of Engineering, Biotechnology Laboratory progress report. Engineering Dept. Report No. 60-92, Los Angeles, Calif., September 1960.
19. Birmingham, H. P., & Taylor, F. V. A human engineering approach to the design of man operated continuous control systems. N.R.L. Report No. 4333, U. S. Naval Research Laboratory, Washington, D. C., April 1954.
20. Birmingham, H. P., et al. A demonstration of the effects of quickening in multiple-co-ordinate control tasks. NRL Report 4380, U. S. Naval Research Laboratory, Washington, D. C., June 1954.
21. Bradley, J. V. Desirable control display relationships for moving-scale instruments. Wright Air Development Center, Wright-Patterson Air Force Base, Ohio, September 1954. (AD 61 819)
22. Bradley, J. V., & Wallis, R. A. Spacing of on-off controls. I: Push buttons. Wright Air Development Center, Wright-Patterson Air Force Base, April 1958. (AD 142 272)
23. Bradley, J. V., & Wallis, R. A. Spacing of on-off controls. II: Toggle switches. Wright Air Development Center, Wright-Patterson Air Force Base, Ohio, March 1959. (AD 212 270)
24. Blount, E., et al. Technical and operational evaluation of the type IV pictorial-display equipment. CAA-Technical Development Report No. 242, Civil Aeronautics Administration, Indianapolis, Indiana, June 1954.

25. Bogdan, L., et al. Ship control information study. (SUBIC). Final Report. Report No. IM-1306-V-2, Cornell Aeronautical Laboratory, Inc., Buffalo, N. Y., July 1959.
26. Bond, N. A., Jr., & Westland, R. A. Aircraft information exchange requirements, a projection for 1966-70. Dunlap and Associates, Inc., Santa Monica, Calif., June 1961. (SECRET)
27. Briggs, G. E. Pursuit and compensatory modes of information display: A review. AMRL-TDR 62-93. Aerospace Medical Division, Wright-Patterson Air Force Base, Ohio, 1962.
28. Brillouin, L. Science and information theory. New York: Academic Press, Inc., 1956.
29. Brown, J. E., Bertone, C. M., & Obermayer, R. W. Army aircraft voice-warning systems study. Technical Memorandum 6-68, U. S. Army Human Engineering Laboratories, Aberdeen Proving Ground, Md., 1968.
30. Byford, G. H. The corneoretinal potential in eye movement recording: What does it measure? FPRC Memo 163, Flying Personnel Research Center, England, July 1961.
31. Byford, G. H. A simple technique for recording small eye movements. FPRC Memo 162, Flying Personnel Research Center, England, September 1961.
32. Carnap, R., & Y. Bar-Hillel. An outline of a theory of semantic information. Technical Report No. 247, Massachusetts Institute of Technology, Research Electronics Laboratory, Cambridge, Mass., 1952.
33. Carel, W. L. Analysis of pictorial displays. First quarterly report. Rept. No. 2732.01/19, Hughes Aircraft Co., Culver City, Calif., September 1964. (AD 606 705)
34. Carel, W. L. Analysis of pictorial displays. Third quarterly progress report. JANAIR Rep. 2732.01/25, Hughes Aircraft Co., Culver City, Calif., March 1965. (AD 613 274)
35. Carel, W. L. Pictorial displays for flight. Hughes Aircraft Co., Culver City, Calif., December 1965. (AD 627 669)
36. Chapanis, A. Research techniques in human engineering. Baltimore, Md.: The Johns Hopkins Press, December 1958.
37. Chapanis, A., et al. Lectures on men and machines. Baltimore, Md.: Systems Research Laboratory, 1947. (Task Order I, Contract N5 ORI-166)

38. Cooper, J. I., & Rabideau, G. F. A guide to the use of functions and task analysis as a weapon system development tool. Report No. NB-60-161, Norair Division, Northrop Corporation, Hawthorn, Calif., 1960.
39. Corkhill, D. E., & Lythgoe, R. J. Some experiments on eye movements. British Journal of Ophthalmology, 1956, 13(29), 433.
40. Cosler, A. S. Navigation techniques and displays for interplanetary space flight. Quarterly Progress Report No. (813)-1-276, Ohio State University Research Foundation, Columbus, Ohio, 1958.
41. Courtney and Company. Information requirements (new statements). Memorandum Report No. 2, Fort Worth, Tex., June 1957.
42. Courtney and Company. Mission profile. Memorandum Report No. 3, Fort Worth, Tex., June 1957.
43. Courtney and Company. Preliminary environmental and machine behavior parameters. Memorandum Report No. 4, Fort Worth, Tex., June 1957.
44. Cronbach, L. J. A consideration of information theory and utility theory as tools for psycho-metric problems. College of Education, University of Illinois, Urbana, Ill., 1953 (AD 25 723)
45. Douglas Aircraft Company, Inc. Human factors for Army-Navy instrumentation program. Engineering Report ES 40394, Long Beach, Calif., August, 1961.
46. Dunlap and Associates, Inc. An examination of pilot information requirements. Douglas Aircraft Company, Inc., Long Beach, Calif., November 1962. (AD 401 662)
47. Dunlap and Associates, Inc. Human engineering of aircraft instruments. Stamford, Conn., March 1954.
48. Dunlap and Associates, Inc. Composite mission analysis. Technical Report No. 58-5, Stamford, Conn., October 1958.
49. Dunlap and Associates, Inc. Integrated instrumentation for aircraft. Stamford, Conn., December 1954.
50. Ely, J. H., et al. Design of controls. In: The joint services human engineering guide to equipment design (Chap. VI). Wright Air Development Center, Wright-Patterson Air Force Base, Ohio, November 1956. (AD 118 023)
51. Ely, J. H., et al. Man-machine dynamics. In: The joint services human engineering guide to equipment design (Chap. VII). Wright Air Development Center, Wright-Patterson Air Force Base, Ohio, November 1957. (AD 131 082)

52. Eriksen, C. W. Partitioning and saturation of the perceptual field and efficiency of visual search. Wright Air Development Center, Wright-Patterson Air Force Base, Ohio, April 1954. (AD 40 730)
53. Eriksen, C. W. Multidimensional stimulus differences and accuracy of discrimination. Wright Air Development Center, Wright-Patterson Air Force Base, Ohio, June 1954. (AD 50 076)
54. Feddersen, W. E. The effect of variations in control system dynamics upon tracking performance. Bell Helicopter Corporation, Fort Worth, Tex., October 1958.
55. Fitts, P. M. Human engineering concepts and theory. The University of Michigan, Ann Arbor, Mich., August 1959.
56. Fitts, P. M. The information capacity of the human motor system in controlling the amplitude of movement. Journal of Experimental Psychology, 1954, 47, 381-391.
57. Fitts, P. M., Jones, R. E., & Milton, J. L. Eye movements of aircraft pilots during instrument landing approaches. Aeronautical Engineering Review, 1950, IX(2), 1-6.
58. Fitts, P. M., Jones, R. E., & Milton, J. L. Eye fixations of aircraft pilots: III. Frequency, duration, and sequence fixations when flying Air Force ground controlled approach system (GCA). USAF Technical Report No. 5967, Wright Air Development Center, Wright-Patterson Air Force Base, Ohio, February 1950.
59. Fogel, L. J. The human computer in flight control. IRE Transactions on Electronic Computers, September 1957. Pp. 195-201.
60. Folley, J. D., et al. (Ed.) Human factors methods for system design. Washington, D. C.: American Institute for Research, 1960.
61. Fromer, R., & Horowitz, M. W. Flight information displays for instructional consoles. In: Handbook of instructor station design (Chap. I). U. S. Naval Training Device Center, Port Washington, N. Y., September 1958.
62. Gainer, C. A., & Semple, C. A. Current trends in cockpit development. Paper presented at ECCANE, Baltimore, Md., October 1964.
63. Gainer, C. A., & Obermayer, R. W. Pilot eye fixations while flying selected maneuvers using two instrument panels. Human Factors, 1964, 6, 485-501.

64. Garrison, J. F. Design and fabrication of a time sharing device. Wright Air Development Division, Wright-Patterson Air Force Base, Ohio, May 1960.
65. General Dynamics Corporation. End item detail specification, vertical display indicator group. ZE 09007G and revisions. General Dynamics Corporation, Fort Worth, Tex., October 1966.
66. General Electric Company. Human factors on ANIP. New York, June 1960.
67. General Electric Company. Human factors in the contact analog. New York, April 1959.
68. Gibson, J. J. The perception of the visual world. New York: Houghton-Mifflin, 1950.
69. Goode, H. H., & Machol, R. E. System engineering. An introduction to the design of large-scale systems. New York: McGraw-Hill, 1957.
70. Gottsdanker, R. Reaction time, the time to initiate a reponse. Minneapolis-Honeywell Regulator Company, Minneapolis, Minn., 1958.
71. Gottsdanker, R., & Senders, J. Compatibility of display and control. Minneapolis-Honeywell Regulator Company, Minneapolis, Minn., 1959.
72. Grether, W. F. Discussions of pictorial versus symbolic aircraft instrument displays. Wright Air Development Center, Wright-Patterson Air Force Base, Ohio, August 1947. (ATI 64 587)
73. Grether, W. F. Standards to be employed in research on visual displays. National Research Council, Vision Committee, Washington, D. C., October 1947-revised March 1950. (ATI 105 507)
74. Grumman Aircraft Engineering Corporation. Recommended pilot displays. GAEC Report 9064, Grumman Aircraft Corporation, Bethpage, N. Y., January 1964.
75. Grumman Aircraft Engineering Corporation. DORA status report and evaluation. GAEC Report 9165, Grumman Aircraft Corporation, Bethpage, N. Y., January 1965.
76. Hall, J. A. M. Effects on controlled element on the human pilot. Wright Air Development Center, Wright-Patterson Air Force Base, Ohio, August 1958. (AD 130 979)
77. Hanes, L. F., Ritchie, M. L., & Kearns, J. H., III. A study of time-based methods of analysis in cockpit design. ASD-TDR-63-289, Aeronautical Systems Division, Wright-Patterson Air Force Base, Ohio, May 1963.

78. Hardwicke, R. M., & Pazera, E. E. A study of pilot eye movements during visual flight conditions in army fixed-wing liaison-reconnaissance-type aircraft. Technical Development Report No. 389, Federal Aviation Agency, Indianapolis, Indiana, March 1959.
79. Harsh, C. M. Methods of enhancing operator capabilities. Paper presented at 1960 APA Symposium on: Operator load and capability problems in information processing systems. Chicago, Ill., September 1-7, 1960.
80. Havron, M. D., & Jenkins, J. P. Information requirements methods as applied to development of displays and consoles. Engineering Psychology Branch, Psychological Sciences Division, Office of Naval Research, Washington, D. C., March 1961. (AD 257 609)
81. Havron, M. D., Watters, D. L., & Allnut, B. C. Control system task and data requirements modes of flight. Bell Helicopter Company, Fort Worth, Tex., August 1962. (AD 426 872)
82. Headquarters, Air Research and Development Command. Handbook of instructions for aircraft designers. Vol. I - Piloted aircraft. Andrews Air Force Base, Washington, D. C., 1955.
83. Holding, D. H. Rates of handling continuous information. Flying Personnel Research Committee Report FPRC 1068, Air Ministry, England, April 1959.
84. Hopkins, C. O., et al. Display and control requirements for manned space flight. Wright Air Development Division, Wright-Patterson Air Force Base, Ohio, April 1960, (AD 242 572)
85. Human Sciences Research, Inc. Information presentation requirements for operator data processing roles in an air/space defense system 1965-75. HSR-RP-60/5-Ky, Arlington, Va., March 1960.
86. Johnson, R. K., & Momiyama, T. S. Flight test and evaluation of the spectocom head-up display installed in an A-5A aircraft. NATC Report FT 2222-65R-64, Naval Air Test Center, Patuxent River, Md., December 1964.
87. Jones, R. E., Milton, J. L., & Fitts, P. M. Eye fixations of aircraft pilots: I. A review of prior-eye-movement studies and a description of a technique for recording the frequency, duration, and sequences of eye fixations during instrument flight. USAF Technical Report No. 5837, Wright Air Development Center, Wright-Patterson Air Force Base, Ohio, September 1949.

88. Jones, R. E., Milton, J. L., & Fitts, P. M. Eye fixations of aircraft pilots: IV. Frequency, duration and sequence of fixation during routine instrument flight. USAF Technical Report No. 5975, Wright Air Development Center, Wright-Patterson Air Force Base, Ohio, December 1949.
89. Kennedy, J. L., et al. Handbook of human engineering data for design engineers. Tufts College, Medford, Mass., December 1949. (ATI 85 211)
90. Ketchel, J. M., & Jenney, L. L. Electronic and optically generated aircraft displays. JANAIR Report 680505, Joint Army-Navy Aircraft Instrumentation Research, Office of Naval Research, Washington, D. C., 1968.
91. Kris, E. C. A technique for electrically recording eye position. USAF Technical Report No. 58-660, Wright Air Development Center, Wright-Patterson Air Force Base, Ohio, December 1958.
92. Krulee, G. K., & Sinclair, E. J. Some behavioral implications information theory. Naval Research Laboratory, Washington, D. C., February 1953. (AD 4969)
93. Krulee, G. K., & Weisz, A. Studies in the visual discrimination of multiple unit displays. Tufts College, Medford, Mass., August 1954. (AD 67 891)
94. Krulee, G. K. Training for reliable system performance. Paper delivered at a symposium on: Human factors in system reliability. APA Convention, Chicago, Ill., September 1960.
95. Krumm, R. L. Human factors criteria for equipment design. MSF TN C-4-59, Martin Space Flight Division, Martin Company, Baltimore, Md., 1959.
96. Laemmel, A. E., & Brogan, J. M. Coded transmission of information. Microwave Research Institute, Polytechnic Institute of Brooklyn, Brooklyn, N. Y., January 1954. (AD 36 785)
97. Lambert, M. Head-up over the hills. Flight International, 22 October 1964.
98. Lear, Inc. Control--display integration. Progress Report No. 7, Grand Rapids Advance Engineering Division, Grand Rapids, Mich., July through August 1959.
99. Lear, Inc. Control--display integration. Progress Report No. 8, Grand Rapids Advance Engineering Division, Grand Rapids, Mich., September through October 1959.
100. Lear, Inc. Control-display integration. Progress Report No. 9, Grand Rapids Advance Engineering Division, Grand Rapids, Mich., November through December 1959.

101. Lear, Inc. Control--display integration. Progress Report No. 10, Grand Rapids Advance Engineering Division, Grand Rapids, Mich., January through February 1960.
102. Lear, Inc. Control--display integration. Progress Report No. 11, Grand Rapids Advance Engineering Division, Grand Rapids, Mich., March through April 1960.
103. Lear, Inc. Control--display study. Summary Report July 1958-July 1960. Mark IV control-display system, Vol. II. Grand Rapids Advance Engineering Division, Grand Rapids, Mich., July 1960.
104. Lear, Inc. Preliminary studies of cockpit information content and equivalence of information in cockpit standby instrumentation. Lear Advance Engineering Report No. 32, Advance Engineering Division & Ritchie and Associates, Inc., Grand Rapids, Mich., November 1960.
105. Licklider, J. C. R. Man-computer symbiosis. Air Force Office of Scientific Research, Behavioral Sciences Division, Air Research and Development Command, January 1960.
106. Lindquist, O. H., & Gross, R. L. Human engineering man-machine study of a weapon system. MH Aero Report R-ED 6094, Minneapolis-Honeywell Regulator Company, Minneapolis, Minn., October 1958.
107. Long, E. R., & Lee, W. A. The role of spatial cuing as a response-limiter for location responses. Wright Air Development Center, Wright-Patterson Air Force Base, Ohio, December 1953.
108. Lund, M. W. Man's abilities in a military system. Research Reviews, October 1957, 16-19.
109. Mackworth, J. F., & Mackworth, N. H. Eye fixations recorded on changing visual scenes by the television eye-marker. FPRC Report 1032, Flying Personnel Research Center, England, January 1958.
110. Matheny, W. G., & Hardt, H. D. Further study in the display of spatial orientation information. Bell Helicopter Corporation, Fort Worth, Tex., August 1958.
111. Matheny, W. G., & Hardt, H. D. The display of spatial orientation information. Bell Helicopter Corporation, Fort Worth, Tex., August 1959.
112. McCollom, I. N., & Chapanis, A. A human engineering bibliography. San Diego State College Foundation, San Diego, Calif., November 1956. (AD 122 248)

113. McGrath, J. J., et al. Geographic orientation in aircraft pilots: Experimental studies of two cartographic variables. TR-751-3, Joint Army-Navy Aircraft Instrumentation Research, Office of Naval Research, Washington, D. C., November 1964. (AD 609 092)
114. McGrath, J. J., et al. Aeronautical charts and map displays: Symposium Proceedings, Joint Army-Navy Aircraft Instrumentation Research, Office of Naval Research, Washington, D. C., November 1966.
115. McKnight, F. S. A preliminary study of operational advantages of pictorial navigation displays. Technical Development Report No. 241, Civil Aeronautics Administration, Indianapolis, Ind., June 1954.
116. Milton, J. L., Jones, R. E., & Fitts, P. M. Eye fixations of aircraft pilots: II. Frequency, duration, and sequence of fixations when flying the USAF instrument low approach system (ILAS). USAF Technical Report No. 5839, Wright Air Development Center, Wright-Patterson Air Force Base, Ohio, October 1949.
117. Milton, J. L., Jones, R. E., & Fitts, P. M. Eye fixations of aircraft pilots. V. Frequency, duration and sequence of fixations when flying selected maneuvers during instrument and visual flight conditions. USAF Technical Report No. 6018, Wright Air Development Center, Wright-Patterson Air Force Base, Ohio, August 1950.
118. Milton, J. L., McIntosh, B. B., & Cole, E. L. Eye fixations of aircraft pilots: VI. Fixations during day and night ILAS approaches using an experimental panel arrangement. USAF Technical Report No. 6570, Wright Air Development Center, Wright-Patterson Air Force Base, Ohio, October 1951.
119. Milton, J. L., McIntosh, B. B., & Cole, E. L. Eye fixations of aircraft pilots: VII. Fixations during day and night GCA approaches. USAF Technical Report No. 6709, Wright Air Development Center, Wright-Patterson Air Force Base, Ohio, February 1952.
120. Milton, J. L., & Wolfe, F. J. Eye fixations of aircraft pilots: VIII. Fixations during zero reader approaches in a jet aircraft. USAF Technical Report No. 52-17, Wright Air Development Center, Wright-Patterson Air Force Base, Ohio, February 1952.
121. Milton, J. L., McIntosh, B. B., & Cole, E. L. Eye fixations of aircraft pilots: IX. Routine maneuvers under day and night conditions using an experimental panel arrangement. USAF Technical Report No. 53-220, Wright Air Development Center, Wright-Patterson Air Force Base, Ohio, March 1954.

122. Morgan, C. T., et al. (Eds.) Human engineering guide to equipment design. New York: McGraw-Hill, 1963.
123. Morrall, J. C. Role of pilot in all-weather operations. Tech Memo BLEV 123, Royal Aircraft Establishment, Farnborough, England, June 1966. (AD 804 648)
124. Murphy, J. V., et al. Integrated cockpit research program. JANUAR Report TR-NR213-041, Joint Army-Navy Aircraft Instrumentation Research, Office of Naval Research, Washington, D. C., 1967.
125. Naish, J. M. Display research and its application to civil aircraft, Farnborough, England. Journal of Royal Aeronautical Society, 1965, 69, 662-679.
126. Narva, M. A., Gainer, C. A., & Muckler, F. A. Integrated instruments: Information requirements for fuel management. WADD-TR-60-638, Wright Air Development Center, Wright-Patterson Air Force Base, Ohio, December 1960. (AD 252 053)
127. Nicholson, J. D., et al. Display requirements study for helicopter IFR formation flight. JANAIR TR-NR 213-054, Joint Army-Navy Aircraft Instrumentation Research, Office of Naval Research, Washington, D. C., 1968.
128. Nicklas, D. R. A history of aircraft cockpit instrumentation 1903-1946. Wright Air Development Center, Wright-Patterson Air Force Base, Ohio, April 1958.
129. Nordhe, P. G. Methodology for analysis of man's role in an advanced space flight system. HSR-RM-59/25-sm, Human Sciences Research, Inc., Arlington, Va., November 1959.
130. Nordstrum, L. Eyelevel flight information by a perspective pole-track. Tech Note-58, SAAB Aircraft Company, Linkoping, Sweden, January 1965.
131. Odeh, R. E., & Olds, E. G. Notes on the analysis of variance of logarithms of variance. USAF Technical Note 59-82, Wright Air Development Center, Wright-Patterson Air Force Base, Ohio, March 1959.
132. Office of Naval Research and Bureau of Aeronautics. Program for development of integrated presentation of flight information. Washington, D. C., January 1953. (AD 82 863)
133. Olson, B. A., et al. Display and control requirements study for a V/STOL tactical aircraft. Vol. I, Analyses. AFFDL-TR-66-114, Air Force Flight Dynamics Laboratory, Wright-Patterson Air Force Base, Ohio, August 1967.
134. Pelton, F. M. An analytical investigation of low altitude display systems. Cornell Aeronautical Laboratories, Inc., Buffalo, N. Y., 1968. (Classified)

135. Pelton, F. M. Studies and simulation of terrain avoidance problems. Cornell Aeronautical Laboratories, Inc., Buffalo, N. Y., August 1962. (AD 332 804)
136. Pfeiffer, M. G., Clark, W. C., & Danaher, J. W. Pilots' visual task: Study of visual display requirements. NAVTRADEVCE783-1, Naval Training Device Center, Port Washington, N. Y., March 1963.
137. Phalon, J. J. Pilot information requirements. Douglas Aircraft Engineering Report No. ES 26840, October 9, 1957.
138. Pickel, F. E., Carter, C. B., & Leith, L. C. Tactical V/STOL weapon system control display requirements study. AFFDL-TR-65-23, Air Force Flight Dynamics Laboratory, Wright-Patterson Air Force Base, Ohio, July 1965. (AD 471 789)
139. Pollock, I. The information of elementary auditory displays. Air Research and Development Command, Bolling Air Force Base, Washington, D. C., November 1954. (AD 53 651)
140. Princeton University. Studies pertaining to the design of visual displays for aircraft instruments, computers, maps, charts, tables and graphs: A review of the literature. United States Air Force Air Material Command, Wright-Patterson Air Force Base, Ohio, April 1949.
141. Ritchie, M. L. Information content of the pilot's panel. Ritchie and Associates, Inc., Dayton, Ohio.
142. Ritchie, M. L., & Baker, C. A. Psychological aspects of cockpit design: A symposium report. Wright Air Development Center, Wright-Patterson Air Force Base, Ohio, April 1957. (AD 118 079)
143. Ritchie, M. L. Some aspects of the problem of display integration. Ritchie and Associates, Inc., Dayton, Ohio, May 1961. (AD 260 889)
144. Ritchie, M. L. Preliminary studies of cockpit information content and equivalence of information in cockpit standby instrumentation. Advance Engineering Report No. 32, Lear, Inc., November 1960.
145. Sardanowsky, W., & Harper, H. P. A study of handling qualities requirements of winged helicopters. USAAVLABS TR-68-39, U. S. Army Aviation Material Laboratories, Fort Eustis, Va., 1968.
146. Semple, C. A., & Swartz, R. W. Time based analysis of control activities and information requirements for V/STOL. AFFDL-TR-65-193, Air Force Flight Dynamics Laboratory, Research and Technology Division, Air Force Systems Command, Wright-Patterson Air Force Base, Ohio, 1966. (AD 480 325)

147. Senders, V., & Cohen, J. The influence of methodology on research on instrument displays. Wright Air Development Center, Wright-Patterson Air Force Base, Ohio, April 1953. (AD 16 747)
148. Shapero, A. Method for performing human engineering analysis of weapon systems. Wright Air Development Center, Wright-Patterson Air Force Base, Ohio, September 1959.
149. Soliday, S. M., & Milligan, J. R. Simulation of low altitude high speed mission performance. SEG-TR-66-67, Vol. I, Vol. II, Vol. III, North American Aviation Company, Columbus, Ohio, 1967.
150. Sperry Gyroscope Company. Progress report of human factors analytical study for head-up display systems and development. AB-1210-008, Sperry Gyroscope Company, Great Neck, N. Y., August 1963. (AD 347 524) (Confidential)
151. Svimonoff, C. The air force integrated flight instrument panel. Wright Air Development Center, Wright-Patterson Air Force Base, Ohio, October 1958. (AD 155 788)
152. Tillinghast, N. W., & Henderson, B. E. A study of cockpit display requirements for VTOL airplanes. Wright Air Development Center, Wright-Patterson Air Force Base, Ohio, March 1958. (AD 150 952)
153. Tufts College. Handbook for human engineering data for design engineers. Medford, Mass., December 1949. (ATI 85 211)
154. U. S. Army Electronic Proving Ground. Integrated flight instrumentation study. Fort Huachuca, Ariz., 1957. (AD 160 177)
155. University of Illinois. Human performance in information transmission. Report R-62, Bio Systems Group, University of Illinois, Urbana, Ill., March 1955.
156. University of Pittsburgh. Development of advanced army aircraft instrumentation system (AAAIS). TIR-12.1.1.1(1), Army Material Research Staff, Washington, D. C., March 1965. (AD 461 162)
157. Vanderplas, J. M. Some perceptual factors involved in the design of obstacle warning displays for aircraft. Wright Air Development Center, Wright-Patterson Air Force Base, Ohio, March 1954. (AD 65 872)
158. Vaughan, W. S., Jr., et al. Information requirements for six command decisions. The advanced submarine in an ASW mission. HSR-RR-60/3, Human Sciences Research, Inc., Arlington, Va., August 1960. (Secret)

159. Westinghouse Electric Corporation. Submarine communication control information requirements. Pittsburgh, Pa., October 1959. (Confidential)
160. Williams, A. Analysis of information required for instrument flight. Special Devices Center, Office of Naval Research, Port Washington, N. Y.
161. Williams, A. C., Jr. Preliminary analysis of information required by pilots for instrument flight. SDC-TR-71-16.1, Psychology Department, University of Illinois, Urbana, Ill., 1949.
162. Williams, A. C., Jr., et al. A program of human engineering research on the design of aircraft instrument displays and controls. Wright Air Development Center, Wright-Patterson Air Force Base, Ohio, December 1956. (AD 110 424)
163. Williams, A. C., Jr., et al. Aspects of pilot decision making. WADC TR-58-522, Wright Air Development Center, Wright-Patterson Air Force Base, Ohio, December 1958.
164. Williams, P. R. Technical progress report on universal contact analog display (UCAD) research, Phase I - systems analysis. Joint Army-Navy Aircraft Instrumentation Research, Office of Naval Research, Washington, D. C., 1965. (AD 616 650)
165. Williams, P. R., & Kronholm, M. B. Technical report on simulation studies of an integrated electronic vertical display (IEVD). Joint Army-Navy Aircraft Instrumentation Research, Office of Naval Research, Washington, D. C., December 1965. (AD 629 157)
166. Wolin, B. R. What is operator work load? System Development Corporation, Santa Monica, Calif., September 1960.
167. Wooding, H. C., & Simpson, J. A. Integrated electronic vertical display (IEVD) research. Joint Army-Navy Aircraft Instrumentation Research, Office of Naval Research, Washington, D. C., 1968.
168. Wright, L. C. Principles and problems of aircraft instrument design and evaluation. Wright Air Development Center, Wright-Patterson Air Force Base, Ohio, May 1954. (AD 33 924).

DISTRIBUTION LIST

| | | |
|--|-------------------------------------|------------------------------------|
| CG, USAMC, Wash, D. C. | CO, USACDC Med Svc Agency | CO, USA Mobility Equip R&D Ctr |
| AMCRL (Ofc of Dep for Labs) | 1 Fort Sam Houston, Texas | 1 Fort Belvoir, Va. |
| AMCRD (Air Def & Msl Ofc) | 1 | Human Factors Engr. |
| AMCRD (Air Mobility Ofc) | 1 CO, USACDC Military Police Agency | |
| AMCRD (Comm-Elec Ofc) | 1 Fort Gordon, Georgia | 1 USAETL-TEB |
| AMCRD-G | 1 | Fort Belvoir, Va. |
| AMCRD (Weapons Ofc) | 1 CO, USACDC Supply Agency | 1 T. L. Fick |
| AMCRD (Dr. Kaufman) | 1 Fort Lee, Va. | |
| AMCRD (Mr. Crellin) | 1 | U. S. Army Natick Laboratories |
| | USACDC Experimentation Command | Natick, Mass. |
| Ofc of Chief of Staff, DA, Wash, D. C. | Fort Ord, Calif. | AMSRE-STL |
| CSAVCS-W-TIS | 1 Liaison Office | 1 Tech Library |
| | Tech Library, Box 22 | |
| USA Behavioral Science Rsch Lab. | 1 Human Factors Division | Commandant, Army Logistics |
| Arlington, Va. | G-2/3, USACDCEC | Mgmt Ctr, Fort Lee, Va. |
| | Fort Ord, Calif. | 1 E. F. Neff, Proc Div. |
| Dr. J. E. Uhlaner, Dir. | | |
| USA Behavioral Science Rsch Lab. | 1 CO, USA Environ Hygiene Agency | USA Gen Equip Test Activity |
| Arlington, Va. | Edgewood Arsenal, Md. | Methods Engr Dir, Hum Fact Div |
| | Librarian, Bldg 2400 | 1 Fort Lee, Va. |
| Behavioral Sciences Division | | |
| Ofc, Chief of Rsch & Development, DA | 1 Human Factors Br, Med Rsch Lab | CG, US CONARC |
| Washington, D. C. | Rsch Labs, Edgewood Ars, Md. | 1 Fort Monroe, Va. |
| | | 1 ATIT-RD-RD |
| Deputy Chief of Staff for Personnel | | |
| Dept of Army, Wash, D. C. | CO, USA Edgewood Arsenal | CO, USA Rsch Ofc, Box CM |
| Personnel Rsch Div. | 1 Psychology Branch | 1 Duke Station, Durham, N. C. |
| | | |
| CG, USACDC, Fort Belvoir, Va. | CO, Frankfort Arsenal, Phila, Pa. | Dir Rsch, USA Avn HRU |
| CDCCD-C | 1 SMUFA-N/6400/202-4 (HF) | 1 PO Box 428, Fort Rucker, Ala. |
| CDCMR | 1 Library (C2500, B1 51-2) | 1 Librarian |
| CDCRE | 1 | |
| | CO, Picatinny Arsenal, Dover, N. J. | CG, USA Missile Command |
| CO, USACDC Air Defense Agency | SMUPA-VC1 (Dr. Strauss) | 1 Redstone Arsenal, Ala. |
| Fort Bliss, Texas | 1 | AMSMI-RBLD |
| | CG, USA Electronics Command | 1 AMSMI-RSB (Chaikin) |
| CO, USACDC Armor Agency | Fort Monmouth, N. J. | |
| Fort Knox, Ky. | 1 AMSEL-RD-GDA | 1 President, USA Infantry Board |
| | | Fort Benning, Georgia |
| CO, USACDC Artillery Agency | Dir, Military Psychol & Leadership | |
| Fort Sill, Okla. | 1 US Mil Academy, West Point, NY | 1 President, USA Maintenance Board |
| | | Fort Knox, Ky. |
| CO, USACDC Aviation Agency | CO, Watervliet Arsenal, N. Y. | 1 Adjutant |
| Fort Rucker, Alabama | 1 SWEWV-RDT | |
| | | USA Armor, Human Rsch Unit |
| CO, USACDC CBR Agency | CO, USA Med Equip Rsch & Dev Lab | Fort Knox, Ky. |
| Fort McClellan, Alabama | 1 Fort Totten, Flushing, LI, NY | 1 Library |
| | | |
| CG, USACDC Combat Arms Group | CO, USA Rsch Inst of Envir Med | CO, USA Med Rsch Lab |
| Fort Leavenworth, Kansas | 1 Natick, Mass. | Fort Knox, Ky. |
| | MEDRI-CL (Dr. Dusek) | 1 |
| CG, USACDC Combat Svc Spt Gp. | | |
| Fort Lee, Va. | 1 CG, USA Medical R&D Command | CG, USA Weapons Command |
| | Main Navy Bldg, Wash, D.C. | Rock Island, Ill. |
| CO, USACDC Comm-Elec Agency | Behavioral Sciences Rsch Br | 1 AMSWE-RDT |
| Fort Monmouth, N. J. | 1 | 1 AMSWE-SMM-P |
| | | 2 SWERI-RDD-PD |
| CO, USACDC Engineer Agency | Dir, Walter Reed Army Inst Rsch | |
| Fort Belvoir, Va. | 1 Washington, D. C. | CG, USA Tank-Automotive Command |
| | 1 Neuropsychiatry Div. | Warren, Michigan |
| | | SMOTA-RR |
| CO, USACDC Inst of Strat & Stab Opns | CO, Harry Diamond Laboratories | 1 AMSTA-BSL |
| Fort Bragg, N. C. | 1 Washington, D. C. | 2 |
| | AMXDO-EDC (B. I. Green) | 1 AMSTA-BAE |

| | | | | | |
|--|--------|---|-------------|--|-------------|
| Director of Research Hum RRO Div. No. 5 (Air Defense) PO Box 6021, Fort Bliss, Texas | 1 | USN Submarine Med Ctr, Libr Box 600, USN Sub Base Groton, Conn. | 1 | The Franklin Inst Research Labs. Phila, Pa. Tech Reports Library | 1 |
| Commandant, USA Artillery & Missile School, Fort Sill, Okla. USAAMS Tech Library | 1 | CO & Dir, Naval Training Dev Ctr. Orlando, Fla. Technical Library | 1 | Inst for Defense Analyses Arlington, Va. Dr. J. Orlansky | 1 |
| CG, White Sands Msl Range, NM Technical Library STEWS-TE-Q (Mr. Courtney) | 1 1 | US Navy Electronics Laboratory San Diego, Calif. Ch, Human Factors Div. | 1 1 | Serials Unit, Purdue University Lafayette, Ind. Dr. Martin A. Tolcott Serendipity, Inc. Arlington, Virginia | 1 1 |
| CG, USA Elec Proving Ground Fort Huachuca, Ariz. Mr. Abraham, Test Dir. | 1 | US Marine Liaison Ofc, Bldg 3071 RADC (EMEDI) Griffiss AFB, N. Y. | 1 1 | Dept Psychol, Univ of Maryland College Park, Md. Mr. R. K. Brome, Govt Pub Section JFK Memorial Library Calif State College/Los Angeles Los Angeles, Calif. | 1 1 1 |
| CO, USA Garrison Fort Huachuca, Ariz. Technical Library | 1 | Hq, ESD (ESTI) L. G. Hanscom Field Bedford, Mass. | 1 1 | Dr. R. G. Pearson, Dept of Ind Eng North Carolina State Univ. Raleigh, N. C. | 1 1 |
| CO, Yuma Proving Ground Yuma, Ariz. Technical Library | 1 | Wright-Patterson AFB, Ohio 6570 AMRL (MRHE) 6570 AMRL (MRHER/Bates) 6570 AMRL (MRHE/Warrick) | 1 2 1 | Dr. F. Loren Smith Dept Psychol, Univ Delaware Newark, Del. | 1 2 |
| CO, USA Tropic Test Center PO Drwr 942, Fort Clayton, CZ Behavioral Scientist | 2 | Air Force Flight Dynam Lab | 1 | Dr. H. W. Stoudt Harvard Univ., Boston, Mass. | 1 |
| CO, USA Arctic Test Center APO Seattle, Wash. STEAC-IT | 1 | AMD (AMRH) Brooks AFB, Tex. | 1 | Dr. Leonard Uhr Computer Sci Dept, Univ Wisconsin Madison, Wisc. | 1 |
| USA Materiel Command Board Bldg 3072, APG | 1 | Civil Aeromedical Institute Fed Avn Agency Aero Center PO Box 25082, Okla City, Okla. Psychol Br, AC-118 | 1 1 1 | Dr. R. A. Wunderlich Psychol Dept, Catholic Univ. Washington, D. C. | 1 1 |
| USA Test & Eval Command Bldg 3071, APG | 1 | USPO Dept, Bur Rsch & Engr, HF Br. Washington, D. C. Mr. D. Cornog | 1 1 1 | Psychological Abstracts 1200 17th Street, NW Washington, D. C. | 1 |
| USACDC Liaison Office Bldg 3071, APG | 1 | US Dept Commerce, CFSTI Sills Bldg, Springfield, Va. | 2 | AC Electronics Div, GMC Milwaukee, Wisc. J. S. Inserra, HF Tech Library, Dept 32-55 2A | 1 1 |
| CO, USACDC Maint Agency Bldg 305, APG | 1 | Defense Documentation Center Cameron Station, Alexander, Va. | 20 | Libr, Chrysler Def Engr, Detroit | 1 |
| Tech Libr, Bldg 3002, APG | 1 | Library, George Washington Univ. Hum RRO, Alexandria, Va. | 1 1 | Grumman Aircraft Engr Corp. Bethpage, LI, NY L. Bricker, Life Sci, Plant 5 | 1 1 |
| USA Small Arms Sys Agcy, APG | 1 | Amer Inst for Research 8555 16th St., Silver Spring, Md. Library | 1 1 1 | Hughes Aircraft Co, Culver City, Calif. Co. Tech. Doc. Ctr. E/110 Itek Corp, Lexington, Mass. | 1 1 1 |
| Dir, Naval Research Laboratory Washington, D. C. Code 5120 Code 5143A | 1 1 | Amer Inst for Research PO Box 1113, Palo Alto, Calif. Library | 1 1 1 | Mgr, Behavioral Sciences, Litton Sci Spt Lab, Fort Ord, Calif. | 1 |
| Code 455 Ofc of Naval Research Washington, D. C. Engr Psychol Br (Dr. Farr) | 2 1 | Ctr for Research in Social Systems The American University Washington, D. C. | 1 | | |
| Dr. Morgan Upton Aerospace Med Rsch Dept US Naval Air Dev Ctr Johnsville, Pa. | 1 | | | | |

| | | | | | |
|---|---|---|---|--|---|
| U. S. Army Natick Laboratories Natick, Mass. | 1 | Mr. James Moreland Westinghouse Elec Corp, R&D Ctr Churchill Boro Pittsburgh, Pa. | 1 | Mr. Gerald J. Fox Grumman Aerospace Corp. Bethpage, New York | 1 |
| AMXRE-PRB | 1 | | | BioTechnology, Inc. Falls Church, Virginia Librarian | 1 |
| AMXRE-PRBN | 1 | | | | |
| AMXRE-PRBE | 1 | | | | |
| USA Bd for Avn Accident Rsch Lab Fort Rucker, Ala Gail Bankston, Bldg 5504 | 1 | Mr. F. M. McIntyre, HF Engr Cleveland Army Tank-Auto Plant Cleveland, Ohio | 1 | | |
| | | Mr. Robert F. Roser, HF Sys Engr General Dynamics Pomona Box 2507 Pomona, Calif. | 1 | Prof. Richard C. Dubes Michigan State University East Lansing, Mich. | 1 |
| Federal Aviation Administration 800 Independence Ave, S.W. Washington, D. C. Admin Stds Div (MS-110) | 1 | | | Dr. Bill R. Brown University of Louisville Louisville, Kentucky | 1 |
| | | Dr. S. Seidenstein, Org 55-60 Bldg 151, Lockheed, P.O. Box 504 Sunnyvale, Calif. | 1 | Prof. James K. Arima Dept of Operations Analysis Naval Postgraduate School Monterey, Calif. | 1 |
| Dr. Lauritz S. Larsen Automobile Manufacturers Assoc. 320 New Center Building Detroit, Mich. | 1 | Mr. Wesley E. Woodson MAN Factors, Inc. San Diego, Calif. | 1 | | |
| | | | | COL Roy A. Highsmith, MC Hq, USATECOM, APG AMSTE-SS | 1 |
| Dr. Irwin Pollack University of Michigan Ann Arbor, Mich. | 1 | Dr. Martin A. Tolcott Serendipity, Inc. Arlington, Virginia | 1 | | |
| | | | | | |
| Dr. Harvey A. Taub Rsch Sec, Psychology Service VA Hospital, Irving Ave & Univ Pl Syracuse, New York | 1 | Dr. Charles Abrams Human Factors Research Goleta, Calif. | 1 | | |
| | | | | | |
| Documents Librarian Wilson Library University of Minnesota Minneapolis, Minn. | 1 | Mr. Wardell B. Welch Code 605D Naval Undersea R&D Center San Diego, Calif. | 1 | | |
| | | | | | |
| Research Analysis Corporation McLean, Va. Document Library | 1 | Dr. Corwin A. Bennett Rensselaer Polytechnic Institute Troy, New York | 1 | | |
| | | | | | |
| Ritchie, Inc. Dayton, Ohio | 1 | The University of Wyoming Laramie, Wyoming Documents Library | 1 | | |
| | | | | | |
| Director, Human Factors Engr Mil Veh Org, GMC Tech Center Warren, Mich. | 1 | Dr. Lawrence C. Perlmuter Bowdoin College Brunswick, Maine | 1 | | |
| | | | | | |
| Sprint Human Factors MP 537 Martin Co., Orlando, Florida | 1 | Dr. Alexis M. Anikeeff The University of Akron Akron, Ohio | 1 | | |
| | | | | | |
| Dr. Herbert J. Bauer GM Rsch Labs, GM Tech Center Warren, Mich. | 1 | CG, USASCOM P.O. Box 209 St. Louis, Missouri AMSAV-R-F (S. Moreland) | 1 | | |
| | | | | | |
| Dr. Edwin Cohen Link Group, Gen Precision Sys Inc. Binghamton, New York | 1 | | | | |
| | | | | | |
| Mr. Henry E. Guttman Sandia Corporation Albuquerque, New Mexico | 1 | Dr. Arthur Rubin U. S. Dept of Commerce National Bureau of Standards Washington, D. C. | 1 | | |
| | | | | | |
| Dr. M. I. Kurke Human Sciences Rsch Inc. McLean, Virginia | 1 | The Boeing Co., Vertol Div. Philadelphia, Pa Mr. Walter Jablonski | 1 | | |

DOCUMENT CONTROL DATA - R & D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

| | | | |
|---|--|---|-----------------------|
| 1. ORIGINATING ACTIVITY (Corporate author) Human Engineering Laboratories Aberdeen Proving Ground, Maryland 21005 | | 2a. REPORT SECURITY CLASSIFICATION Unclassified | |
| | | 2b. GROUP | |
| 3. REPORT TITLE TACTICAL UTILITY HELICOPTER INFORMATION TRANSFER STUDY | | | |
| 4. DESCRIPTIVE NOTES (Type of report and inclusive dates) | | | |
| 5. AUTHOR(S) (First name, middle initial, last name) John A. Barnes | | | |
| 6. REPORT DATE March 1970 | | 7a. TOTAL NO. OF PAGES 103 | 7b. NO. OF REFS 13 |
| 8a. CONTRACT OR GRANT NO. | | 9a. ORIGINATOR'S REPORT NUMBER(S) Technical Memorandum 7-70 | |
| b. PROJECT NO. | | | |
| c. | | 9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report) | |
| d. | | | |
| 10. DISTRIBUTION STATEMENT This document has been approved for public release and sale; its distribution is unlimited. | | | |
| 11. SUPPLEMENTARY NOTES | | 12. SPONSORING MILITARY ACTIVITY | |
| | | | |
| 13. ABSTRACT The task requirements of the Tactical Utility Helicopter Mission have been enumerated and experienced pilots have indicated the instrumentation they feel is necessary to perform these tasks. Film of eye movement was taken for two of the pilots while they were flying missions that incorporated these tasks. The film and the pilot replies were analyzed to provide the information transfer requirements for the Tactical Utility Helicopter flight instrumentation. | | | |

| 14. KEY WORDS | LINK A | | LINK B | | LINK C | |
|---------------------------|--------|----|--------|----|--------|----|
| | ROLE | WT | ROLE | WT | ROLE | WT |
| Helicopters | | | | | | |
| Information Transfer | | | | | | |
| Eye Movements | | | | | | |
| Control Displays | | | | | | |
| Manual Controls | | | | | | |
| Systems Analysis | | | | | | |
| Perception | | | | | | |
| Aircraft Displays | | | | | | |
| Information Requirements | | | | | | |
| Human Factors Engineering | | | | | | |